SCIENTIFIC AMERICAN

[Entered at the Post Office of New York. N. Y., as Second Class Matter. Copyright, 1906, by Munn & Co.]

Vol. XCV.—No. 9.
ESTABLISHED 1845.

NEW YORK, SEPTEMBER 1. 1906.

10 CENTS A COPY
$3.00 A YEAR.

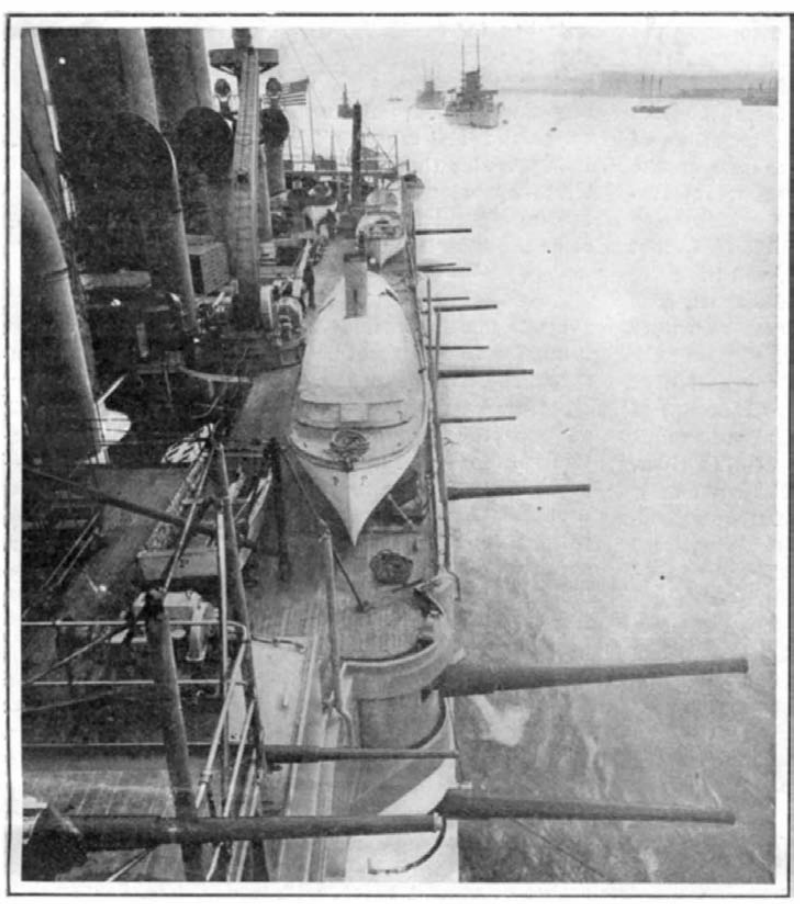

Looking Aft from Flying Bridge of the "Pennsylvania," Showing Broadside Battery of 6-inch and 3-inch Guns.

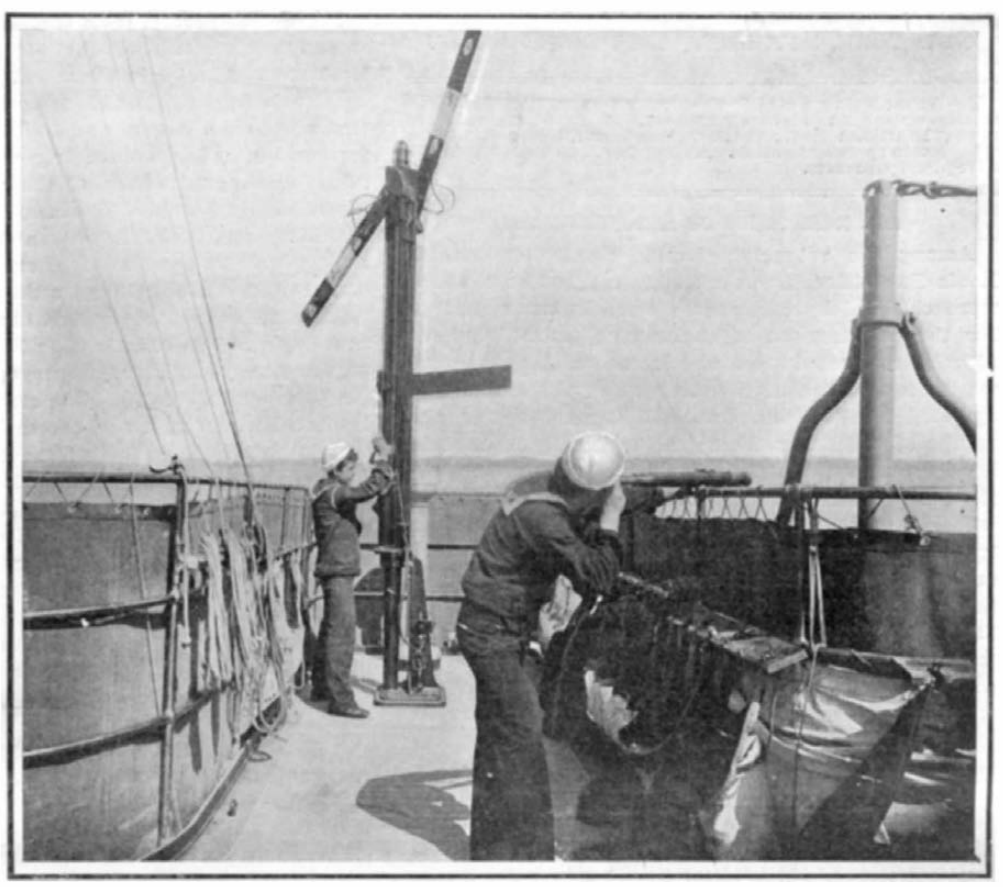

The upper arms represent the arms of a man. They can be moved through 360°. Each position represents a letter.

Semaphore Signaling System on the Flying Bridge.

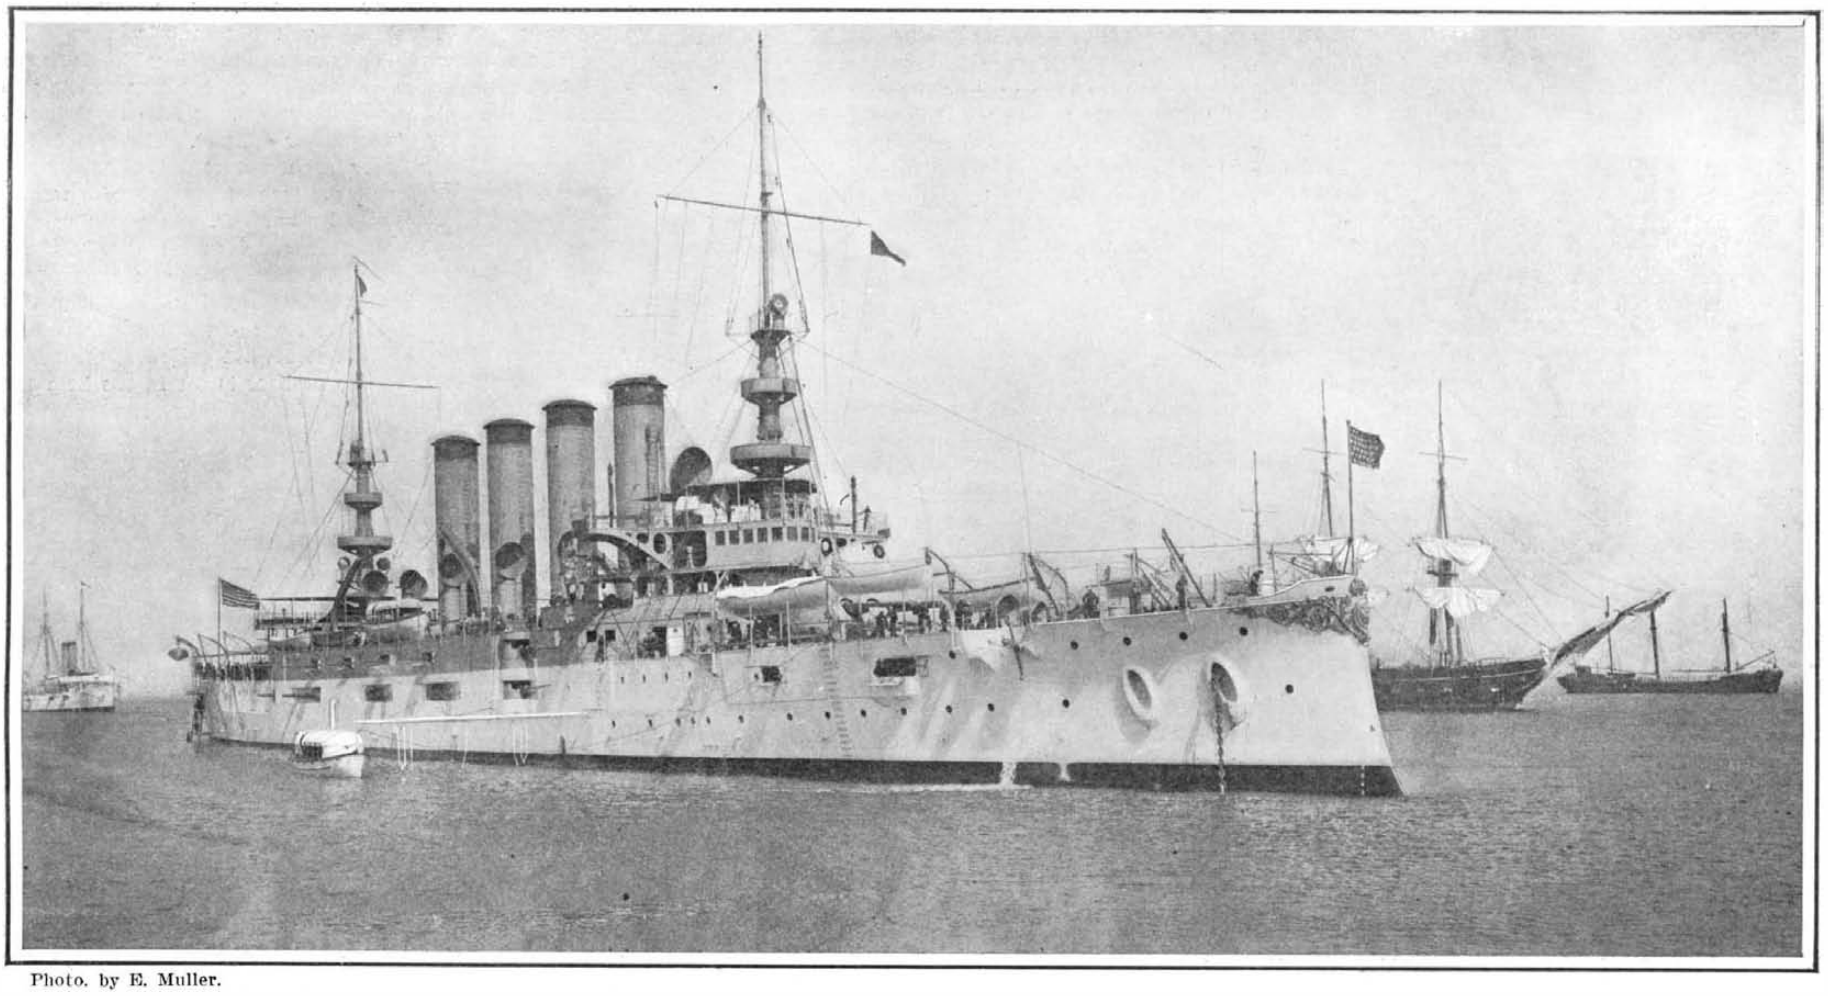

Photo. by E. Muller.

The "Pennsylvania" and three sister ships, "West Virginia," "Colorado," and "Maryland," will form the fourth division.

Armored Cruiser "Pennsylvania," 13,780 tons, 22.4 Knots Speed.

THE REVIEW OF THE ATLANTIC FLEET BY PRESIDENT ROOSEVELT.—[See page 155.]

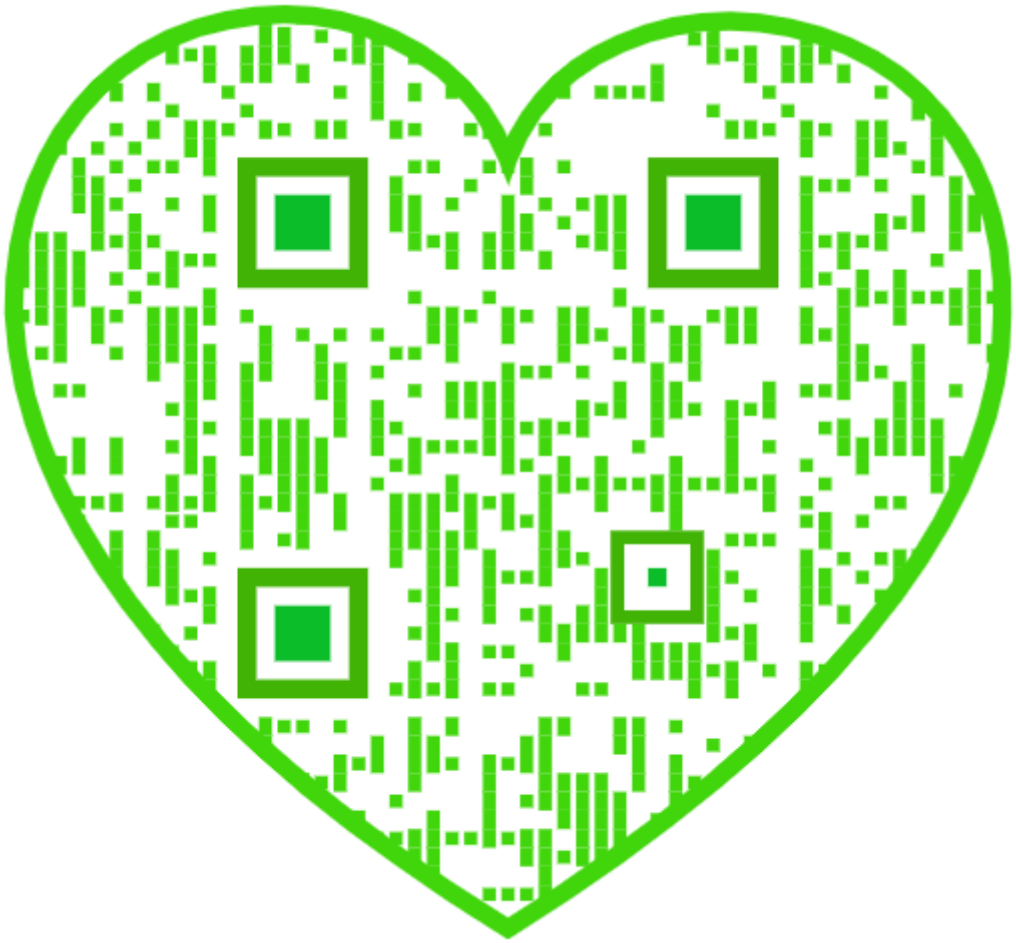

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO. - Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

TERMS TO SUBSCRIBERS

One copy, one year, for the United States, Canada, or Mexico.....$3.00
One copy, one year, to any foreign country, postage prepaid, £0 16s. 5d. 4.00

THE SCIENTIFIC AMERICAN PUBLICATIONS

Scientific American (Established 1845) .....$3.00 a year
Scientific American Supplement (Established 1876)..... 5.00 "
American Homes and Gardens..... 3.00 "
Scientific American Export Edition (Established 1878)..... 3.00 "

The combined subscription rates and rates to foreign countries will be furnished upon application.

Remit by postal or express money order, or by bank draft or check.

MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, SEPTEMBER 1, 1906.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

AIR RESISTANCE OF ELECTRIC CARS.

Among the valuable scientific results of the St. Louis Exposition, few rank higher than those which were obtained by the various commissions appointed for the carrying out of engineering tests. We have already referred in these columns to the excellent work of the locomotive testing plant established and operated by the Pennsylvania Railroad Company, the results of which have been tabulated and published in book form. An equally valuable work was that carried on by the Electric Railway Test Commission, whose work covered very broadly the field of electric traction. Among other tests was a series which was carried out on a straight stretch of track belonging to the Indiana Union Traction Company; and among these was included a series of experiments on atmospheric and train resistance, which were conducted with an air-pressure dynamometer car, designed by members of the commission especially for this purpose.

The resistance due to the pressure of the air on the front of the vestibule and car body was registered for speeds which varied from 25 to 70 miles an hour. Care was taken in these measurements to separate the resistance of the car due to the atmosphere from the total resistance, which latter includes that due to internal friction and to the rolling friction of the wheels on the track. In order to obtain a separate record of air resistance, the car body was so suspended above the trucks that the pressure on the car could be measured separately by suitable dynamometers. Furthermore, the vestibule was suspended separately from the body of the car, and the head-on pressure was registered independently of the other resistances encountered. In order to determine what form of vestibule front presented the least resistance to the atmosphere, four different forms were used in the experiment: First, a vestibule with a plain, flat front; second, the standard curved vestibule as ordinarily used on interurban cars, the radius of the curved front being 5 feet 6 inches; third, a parabolic vestibule with a length of 6 feet 3 inches; and fourth, a vestibule having a wedge-shaped extension of the parabola 2 feet beyond its end. The wisdom of suspending the vestibule so that the pressure upon it could be measured separately from that upon the rest of the car body was shown by the discovery of the fact that an unexpectedly large proportion of the power is expended in overcoming head resistance, and that this resistance is greatly reduced when tapered ends are substituted for flat ends.

The great effect which the shape of the front end has in determining the head-on atmospheric resistance was shown early in the experiments, when it was found to be impossible to drive the test car at a higher speed than 50 miles an hour when it was carrying the flat front end, although when a parabolic wedge front was substituted, the same motor and the same current were easily able to drive the car at a speed of 75 miles an hour. It was proved in the tests that the atmospheric resistance on the rear vestibule of the car was due to a suction, the effect of which was, of course, to retard the car. With a vestibule of the standard shape at the rear, the power absorbed by the suction of the air was found to amount to 16 horse-power at a speed of 60 miles an hour.

The general results obtained by the commission proved that at all speeds the pressure per square foot on the parabolic wedge vestibule is only about one-fourth of that on the flat vestibule, and that for all shapes tested, the unit pressure at 80 miles per hour is about ten times as great as that at 20 miles an hour. At 60 miles an hour the unit pressure on the wedge-shaped vestibule is 2.10 pounds, and on the flat vestibule 8.20 pounds. At 20 miles per hour the flat vestibule recorded a unit pressure of 1.4 pounds; whereas at 80 miles per hour the corresponding pressure worked out at 14 pounds. On the other hand, on wedge-shaped vestibules the pressure was 0.4 pound at 20 miles an hour and 4 pounds at 80 miles an hour.

These experiments would seem to demonstrate conclusively the advantage of the pointed front and rear, not merely for electric cars but for all swiftly-moving vehicles. In this it is in agreement with the celebrated Berlin high-speed tests, which clearly demonstrated the value of the tapered front. The Bavarian state railways have built their recent express locomotives with tapered casings on the various parts of the engine that are exposed to head-on air resistance, and our readers will have in mind our recent illustration of the Union Pacific motor car No. 7, whose shape at front and rear would seem to have been modeled in agreement with the findings of the St. Louis test commission.

GROWTH OF THE HUDSON RIVER STEAMBOAT.

There were several facts that conspired to make the recent maiden trip of the new steamer "Hendrick Hudson" memorable in the annals of steamboat history on the famous Hudson River. Apart from the fact that she is the largest and swiftest of a long line of famous boats, her maiden trip was completed on the ninety-ninth anniversary of the ever-memorable journey of Robert Fulton's "Clermont" from New York city to Albany and back. It was on August 17, 1807, that Robert Fulton's epoch-making trip began, and the little craft returned successfully on the 21st of August. The "Hendrick Hudson" started on the 20th and, returning next day, made her landings, in New York city, exactly on the ninety-ninth anniversary of the completion of the "Clermont's" voyage. The steady growth in size of Hudson River steamers is shown in a study of typical vessels that have navigated the waters of this river.

The "Clermont" of 1807 was 133 feet in length only, or but one foot longer than the America's cup-defending yacht "Columbia." The "Chancellor Livingston," built in 1816, was 154 feet in length; and the "Erie," constructed sixteen years later, had an over-all length of 180 feet. The "Rochester," which measured 209 feet from stem to stern, may be taken as a typical vessel of the year 1836. Twenty-four years later, at about the time of the outbreak of the civil war, that famous old craft, the "Daniel Drew," was placed in service, a vessel which will be familiar even to many of the younger readers of this journal. In this steamer the over-all dimensions had risen to 251 feet. The most marked advance in size and comfort was undoubtedly made when the two sister ships "Albany" and "New York" were placed in service. Each of these was 325 feet in length and they had no difficulty in maintaining an average speed of over 20 miles an hour. The "Albany" was placed in service in 1881, and the "New York" six years later. The last-named vessel, after running successfully for over a decade, was taken to the Erie Basin, Brooklyn, cut in half and lengthened to 350 feet. In the "Hendrick Hudson" the over-all length of the Hudson River steamer has been carried for the first time up to 400 feet, with a corresponding increase in the other dimensions, the boat measuring 82 feet over the guards with 14 feet 4 inches depth of hold and a draft of 7 feet 6 inches.

In the broad field of engineering there are few products that bear such strong individuality as the American river steamboat. There is nothing like it to be found in any other country in the world. With its shallow draft, broad beam, and towering superstructure, with its long lines of amply-lighted staterooms and wide expanse of promenade decks, the typical river steamboat possesses a dignity and grace which combine to render it one of the most picturesque creations of the naval architect. This is particularly true of the boats that ply upon the Hudson River. In the earlier history of steamboat development, iron was scarce and good shipbuilding timber plentiful. But it was soon found that as the length and weight of the boats increased, it was necessary, on account of the great shallowness of the hull, to provide some method of trussing by which the boats could be held to their true sheer line and prevented from "hogging," or the sagging of the bow and the stern. Hence those remarkable trusses extending parallel with the keel of the boat, and the elaborate system of tie-rods leading from the hull to a row of central posts erected upon the keel of the ship. Another characteristic and decidedly picturesque feature was the curious walking-beam engine, whose low speed of revolution necessitated the construction of paddle wheels truly gigantic in size. In the earlier boats, moreover, the boilers were carried upon the guards and outside of the hull of the vessel; indeed, several fine old boats of this description, notable among which is that swift and graceful craft, the "Mary Powell," are still doing good service, and seem likely to for many years to come.

It was only a question of time, however, before huge stiffening trusses, multitudinous hog chains, cumbersome walking beam engines and ponderous paddle boxes would have to give way to more modern and scientific methods of construction—indeed, it is surprising that these makeshift methods, rendered necessary by the conditions of a long bygone day, should have survived in one or two notable vessels which have been built for night service on the Hudson River within the last few years. In the "Hendrick Hudson," however, steel has taken the place of wood in the construction of the hull; low-pressure boilers and cumbersome walking-beam engines have disappeared, and their place has been taken by compact, high-pressure boilers, and inclined direct-acting engines placed below the main deck of the steamer. The result of these changes is that practically the whole of the ship above the main deck is devoted to passenger accommodation and the decks are no longer obstructed by the capacious well which formerly housed in the A-frame, connecting rod, piston, and the gear of the old walking-beam type. The result, looking at the ship from the broadside, is a decided gain in smartness and general symmetry of appearance. The addition of another deck, bringing the total decks up to five, has increased the capacity, until it is estimated that 5,000 day passengers could be carried. On the maiden trip some 4,000 were accommodated without any discomfort from crowding. The speed of the vessel on the trial trip was 23.7 land miles per hour, and it is probable that when the engines, which are of the triple-expansion three-cylinder type, have worn to their bearings, the boat will be good for a maximum speed of 24 miles an hour.

CEMENT BASES FOR WOODEN TELEGRAPH POLES.

Up to date, wooden telegraph poles remain in most countries the cheapest in first cost and in many respects as desirable as any. The question of durability, however, has been a sore point to those in charge of equipment and maintenance. All sorts of preservative solutions and all kinds of treatment therewith—pressure, vacuum, a combination of the two, etc., have been tried, but the wooden mast still remains more perishable than the iron, and its renewal means an expensive piece of work, outside of the cost of the pole itself. Happily, however, a new idea has been evolved from the depths of some one's moral consciousness or the heights of his inventive faculties, and according to which not only new wooden poles may be made more durable, but those which are already rotten at the base may be utilized to advantage and given a longer second life than the first. What is particularly gratifying to telegraph and telephone companies is the fact that this process is not patented, and from the point of view of first cost not too burdensome.

The process consists in mounting the pole in a socket of cement beton, with which, however, it does not come in direct contact. When we say "in a socket" we err in the matter of technical accuracy; for in the later forms of mounting there is a space between the foot of the wooden pole and the top of the cement base. The pole is attached to the base by four iron splice-plates or fish-plates. The cement base stands 8 to 10 inches above the ground level, and is a prism of the same diameter as the pole which it has to carry. On account of the severe leverage tending to break it off, it is strengthened with iron in the well-known manner of Monier or Coignet. The attachment of a wooden pole to such a foot takes only about twenty minutes; and the same is true in the matter of replacing one pole by another. To put a cement base on an old pole with a rotten foot the latter is sawed off about 8 to 10 inches above the ground and without removing the wires lifted a couple of feet away and leaned to one side; the old rotten foot is then removed, the hole somewhat enlarged, the ready-prepared cement stump or base is set in the hole and well rammed in and the old pole then attached to the cement base by the fish-plates, leaving say two inches between the two. The life of a pole thus mounted is reckoned at sixteen years. As regards the resistance of the cement base to breakages—that has been settled beyond question by the simple means of attaching a rope to the top of several poles and pulling horizontally thereon until something gave way. That "something" was in every case the wooden pole, and the break took place in every instance just where it was expected, namely, right above the cement base, or rather the fish-plate.

The bases are molded in a plain prismatic box, well rammed in, and left two or three days in the mold to set; they are then firm enough to handle without danger of injury. The bases are left to dry another week after removing them from the mold.

The first application of the multiple-unit system of railway motor operation and electrical control to motors of the alternating-current commutator type will be made soon on the suburban extensions of the Milwaukee Electric Railway and Light Company, one of which is 20 miles and the other 16 miles long. According to Power, the motors will be the "combination" type for operation on either alternating or direct current. Each car will be equipped with four 75-horse-power motors. The electro-motive force on the alternating-current overhead lines will be 3,300 volts, and transformers on the cars will reduce this to the proper voltage for the motors.

THE HEAVENS IN SEPTEMBER.

BY HENRY NORRIS RUSSELL, PH.D.

If we look directly upward early on a clear September evening, we will see the heavens just as they are shown on our map. Right above us is the fine constellation of the Swan—a great cross of stars in the Milky Way. West of it, and near to it, is the Lyre, with one very bright star, Vega (marked with the letter *a* on the map).

Following down the Milky Way to the southwest, we come to the Eagle (Aquila), whose brightest star, Altair, is nearly equal to Vega. Below this is the brightest and finest part of the Milky Way, which is almost startlingly brilliant on a thoroughly clear night. Even an opera glass shows that it is full of groups and clusters of stars, and those who have telescopes, of whatever size, will find it a happy hunting ground, full of magnificent fields. It extends far down to the southwest, where the constellations of the Scorpion and the Archer are beginning to set.

In the western and southwestern sky are the Serpent Holder (Ophiucus) and the Serpent, which, like Hercules to the north of them, can be studied better from the map than from any description. Below Hercules is the Northern Crown, and beneath this the Herdsman, with the great red star Arcturus. The Dragon and the Little Bear are to the left of the Pole, and the Great Bear is below them, so that the Dipper lies along the northwestern horizon. Cepheus and Cassiopeia are on the right of the pole and above it, toward Cygnus.

East of the Milky Way stretches a row of fine constellations. Due east, and about half-way up to the zenith, is Pegasus, which can be known at once by the "great square," whose four stars are all of the second magnitude. The northeastern one belongs not to Pegasus, but to Andromeda, which extends far to the northward and eastward. Still further on in the same direction we reach Perseus and then Auriga, the Charioteer, whose brightest star, Capella, is just rising.

The most interesting object in Andromeda is the great nebula, which is marked on our map, a few degrees northwest of β Andromeda. It is visible to the naked eye, and conspicuous in a field glass, but the marvelous concentric spirals which form its outer portions are revealed only by photography.

Below Andromeda is the small group of the Triangle, and the smaller but brighter one which marks the head of Aries, the Ram.

The Zodiacal constellations of the Fishes (Pisces), the Water Bearer (Aquarius), and the Sea Goat (Capricornus), which lie in the southeastern sky, contain no bright stars. The planet Saturn is now in Aquarius, and is much brighter than any star near it. It lies almost on the line of the western edge of the great square of Pegasus, extended southward. Farther down, in this same line, is a solitary bright star, Fomalhaut, in the Southern Fish.

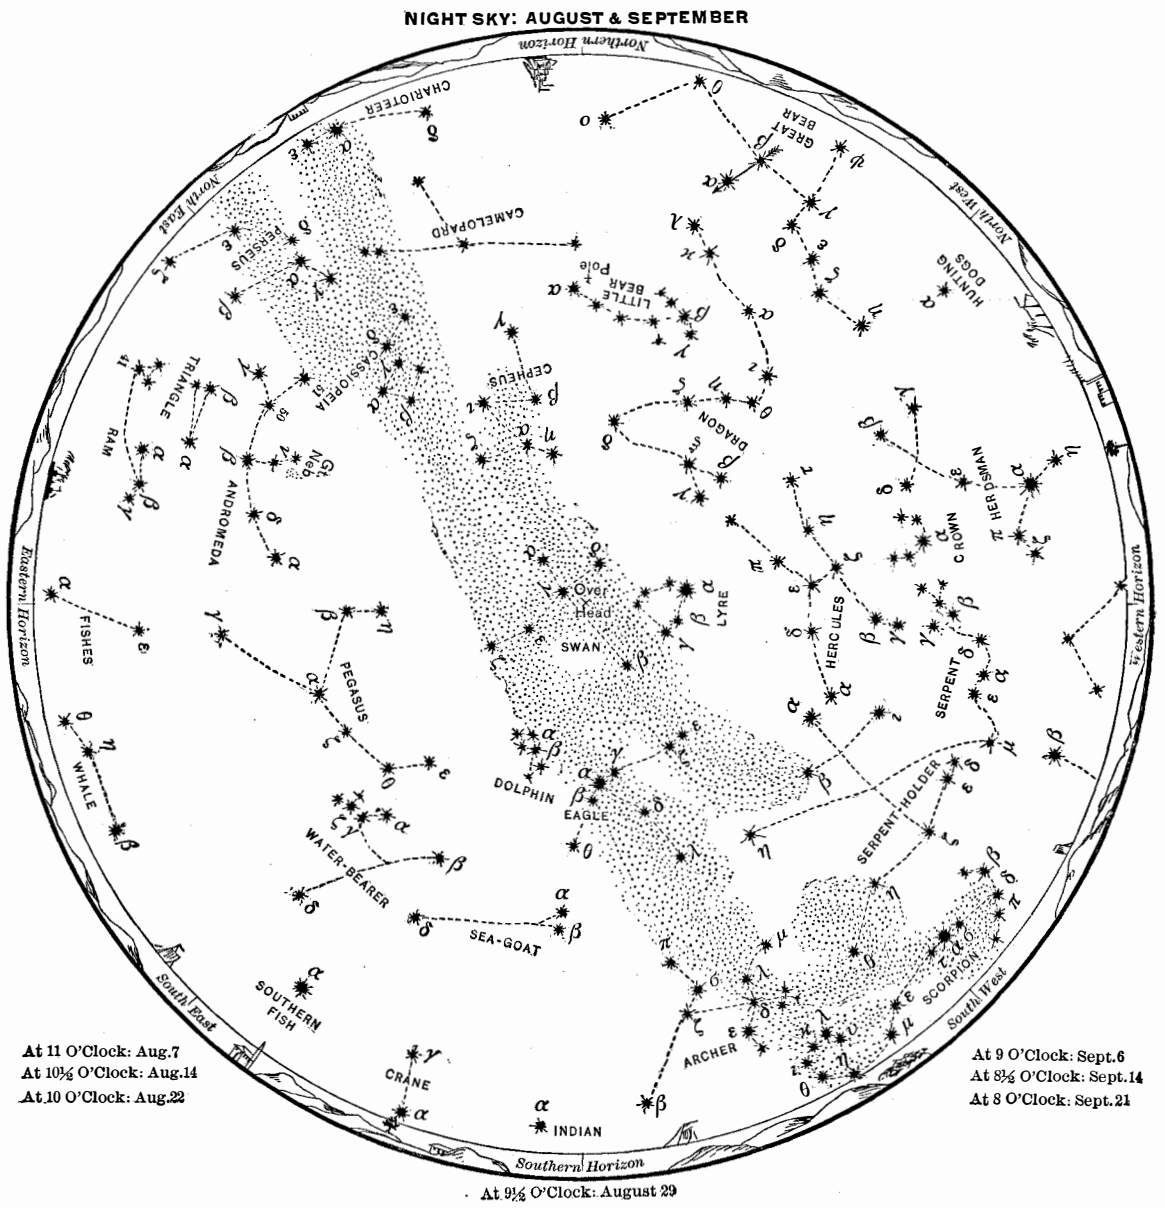

In the map, stars of the first magnitude are eight-pointed; second magnitude, six-pointed; third magnitude, five-pointed; fourth magnitude (a few), four-pointed; fifth magnitude (very few), three-pointed, counting the points only as shown in the solid outline, without the intermediate lines signifying star rays.

THE PLANETS.

Mercury is morning star at the beginning of the month, rising at about 4:30 A. M. On the 4th he is in conjunction with Mars, passing him at a distance equal to one-third of the moon's apparent diameter. Both planets are near the bright star Regulus and soon pass north of it at a distance of less than a degree.

During the latter part of the month Mercury is invisible and on the 24th he passes behind the sun and becomes an evening star.

Venus is evening star in Virgo, and is very bright. On the 20th she is at her greatest elongation—that is, her apparent distance from the sun is greatest. She is, however, far south of the Sun, and is not nearly as conspicuous as at a spring elongation, but sets at about 8 P. M.

Mars is morning star in Leo, rising about 4:30 A. M. Jupiter is in Gemini, and rises near midnight in the middle of the month.

Saturn is in Aquarius, and comes to opposition on the 4th. He is now in a better position for observation than for several years past, and will well repay any one who turns a telescope upon him. The Earth is getting near the plane of his rings, so that we see them much more nearly edgewise than last year. A few years ago they appeared as an oval about half as wide as it was long. Now the length of the ellipse is ten times its breadth, and the rings seem to stick out on each side of the ball of the planet like handles. In another year we will see them edgewise, and they will then disappear entirely, except in very powerful telescopes, to broaden out again in the year following, when we see their opposite side.

The brightest of Saturn's nine satellites, Titan, may be easily seen with a small telescope. It is west of the planet on the 5th and 21st, and east of it on the 13th and 29th (its period being sixteen days). When it is north or south of the planet it now seems so close to it (less than the planet's diameter) that it will be hard to see it with a small instrument.

Uranus is in Sagittarius and is in quadrature on the 28th, coming to the meridian at 6 P. M. Neptune is in Gemini and can be observed before sunrise.

THE MOON.

Full moon occurs at 6 P. M. on September 2, last quarter at 4 P. M. on the 10th, new moon at 7 A. M. on the 18th, and first quarter at 1 A. M. on the 25th. The moon is nearest us on the 21st, and farthest off on the 9th. She is in conjunction with Saturn on the 2d, Jupiter and Neptune on the 12th, Mars on the 16th, Mercury on the 17th, Venus on the 21st, Uranus on the 24th, and Saturn again on the 30th.

The conjunctions with Saturn are close, and occultations are visible in the southern hemisphere.

At 6 P. M. on the 23d the sun crosses the celestial equator and enters the sign of Capricorn, and in the old expression of the almanac, "autumn commences."

THE USE OF CLAY CONES IN STEEL HEATING.

The days of estimating the heat of a work-piece by the color have gone by—at least in establishments where any weight is laid on uniformity of product. In the first place, no two men will agree as to the color of a piece in any one fire or bath; in the second, the same temperature will be differently estimated in different parts of the shop or at different times of the year—or even day; and in the third place (what is of equal importance), no two steels will show the same color for the same temperature. Something more exact must take the place of the eye. There are some good pyrometers, but they are generally expensive and delicate, and inconvenient to apply. But there is a means of measuring—not estimating—temperature, which manufacturers of fine porcelain use, which should be of great value to steel workers in enabling them to ascertain with certainty just what the temperature in a furnace really is, instead of guessing at it. And here we may add what we should have given as fourthly above—that the eye grows tired and less sensitive to color; so that the same temperature will be estimated lower, after ten minutes' watching red or white hot metal or combustible.

The method to which we refer consists in the use of porcelain—or rather clay—cones of various melting or softening points; there are about sixty different grades, each stamped with a number corresponding to a definite temperature at which slumping down takes place. The range of temperature is between 590 deg. and 1,940 deg. C., or say **1,094** to 3,524 deg. F.

In order to find out which cones to use, where the right temperature is not known in degrees, the first test is made with several cones, and that one is chosen as the standard which at the desired temperature curls over and nearly or quite touches the floor of the furnace. It is best to use two cones of the proper number, one for the hottest and the other for the coolest part of the furnace; their curling over is to be watched through the usual peep-holes, preferably covered with mica. The cones should be protected from direct flame, just as much as the work-pieces are. A good way is to fence them around with two bricks on the side and one on top, the cone also standing on a brick. Another way is to use open-sided clayware hoods provided for the purpose, and which melt at a higher point than any of the cones. There are also small muffles which serve the same purpose, as well as capsules with lids; these latter, of course, must be drawn from the furnace in order to observe the cones.

Just why the cones now used are not marked with the melting temperatures instead of numbers ("022," "09," "29," etc.), "deponent saith not, not knowing"; perhaps some wire-gage manufacturer can give the reason.

"GALVANIZING" WITH ZINC-ALUMINIUM ALLOY.

In order to get a "galvanizing" bath that shall be quite liquid and yield a brighter surface than is attainable by the use of zinc alone, Gührs uses an alloy composed of about one-half of one per cent of aluminium, and one-fifth per cent of bismuth with the zinc. In order to get this alloy in proper state of diffusion it is necessary to melt the aluminium at the same time with the zinc; the bismuth can be melted in at the same time if desired. It is claimed that simultaneous melting of the zinc and the aluminium prevents the formation of oxide and of hard dross. In order to effect this desirable simultaneous melting of these two metals, it is best to prepare beforehand an alloy of zinc and aluminium, or of these with bismuth, in stronger proportions of aluminium than is desired in the bath—for instance, 20 parts of aluminium and the same of zinc, with 5 of bismuth, well stirred while melting. This "mix" is to be melted with the rest of the zinc, in such proportions as will give to the resulting melted mass the requisite proportions for the bath.

A higher percentage of aluminium can be used than one-half (one two-hundredths of the entire weight), but it effects no improvement above that brought about by the use of the smaller quantity. The bismuth may be used in even smaller quantities than the above-quoted one-fifth of one per cent.

An American patent has been granted for making pens of tantalum or its alloys.

SANITATION OF THE CITY OF WASHINGTON.—I.

BY BEN. WINSLOW.

THE AQUEDUCT AND FILTRATION PLANT.

The average annual death rate of the city of Washington, according to the Twelfth Census, is with one exception the highest of all the cities of the United States having a population of over 100,000. The average annual death rate of Washington for the period covered by the last census is 23.09 per 1,000 population, while the average for cities of approximately the same size is about 17 per 1,000. In the table of annual death rates per 100,000 population due to typhoid fever in cities of the same class, Washington stands first with 78, which is 20 higher than Cleveland, the next highest city on the list. The capital city of the nation is now nearing the end of a costly effort to reduce its abnormally high death rate to a more reasonable figure, and the work has been done so quietly that the citizens know little of it.

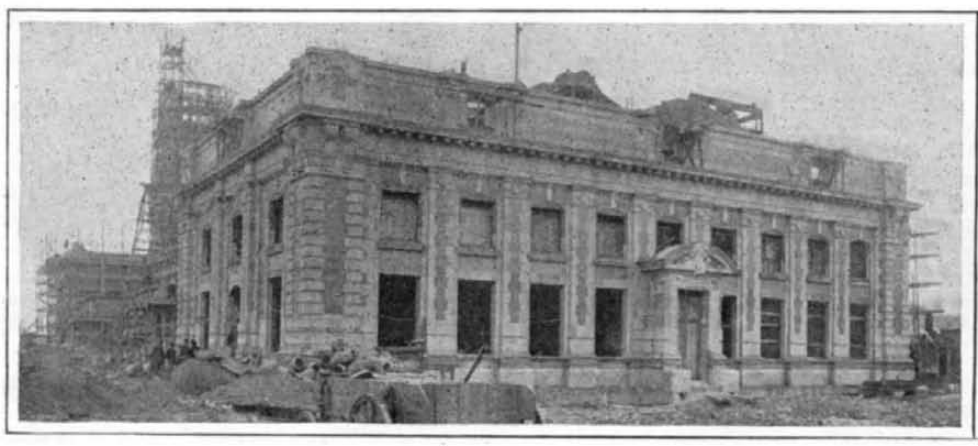

A Completed Section of the Pumping Station.

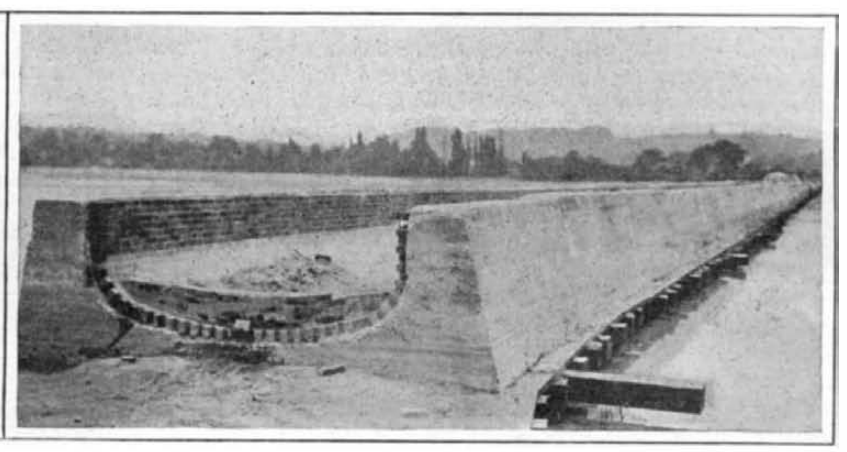

Laying the Outfall Sewer Across the Swamp Lands.

Long before the city even dreamed of a filtration plant; before the use of any filters for water, except probably inadequate and unsatisfactory individual devices, the city of Washington struggled with the momentous question of pure drinking-water supply. Major L'Enfant, under the direction of Gen. Washington, made numerous surveys, to "ascertain the practicability of obtaining a full supply of good water for the federal capital," but it was a long time before the idea of bringing the city's water fifteen miles was considered with any degree of seriousness.

The immense volume of water discharged over the Great Falls of the Potomac, situated fifteen miles above the city, marked that place as the future source of water supply many years before those in authority finally obtained the necessary means and sufficient courage to attempt what was then considered an almost impossible task. The expense was the greatest stumbling block to the Great Falls project, the estimated cost being so great that it staggered the young government; and although some surveys were made by order of Congress in 1850, owing to the lack of sufficient funds the Great Falls project was not gone into at any length, the surveys and investigations of the Topographical Corps having been confined to the Rock Creek proposition. Col. Hughes, who reported the results of the surveys, contemplated the building of a dam which would give a supply of about eight million gallons of water from Rock Creek per diem.

The population of Washington at that time was forty thousand, and this volume of water was considered sufficient to supply the city for the next forty years. The proposed daily supply was one and a half million gallons, or over thirty gallons per capita per diem. In addition to the dam, it was proposed to build a sedimentation reservoir on "Mederian Hill," and a distributing reservoir, "to be established just back of Franklin Road, the highest ground in the city." "Just back of Franklin Road" was then a considerable distance from the city; but now it is in the heart of it.

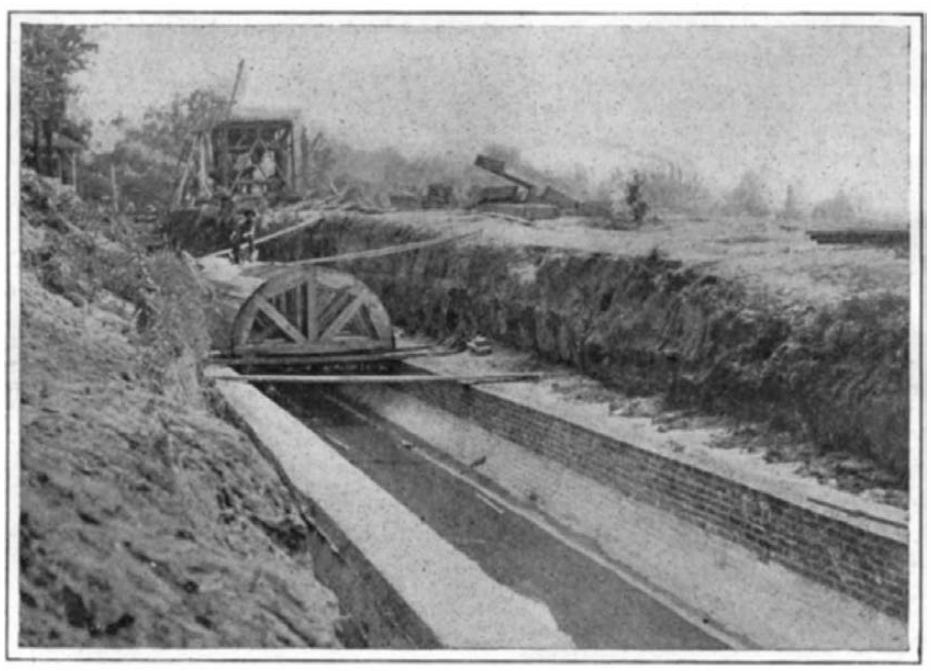

The Dry Land Continuation of the Outfall Sewer.

The Great Falls proposition originated with Capt. M. C. Meigs, of the Corps of Engineers, U. S. A. The Rock Creek project having been discarded, Congress in 1852 appropriated five thousand dollars to "enable the President to devise a plan for supplying the city with an adequate water supply," and surveys were made ove the Great Falls route during the winter of 1852-53. Congress at its next session passed a resolution which put the selection of plans in the hands of the President, and it also voted to defray from the Treasury the cost of any project he approved. The President accepted the Meigs plan, which called for a nine-foot conduit from Great Falls.

To hold the water at a proper level a dam was constructed at Great Falls, with its comb one hundred and forty-five feet above high tide at Washington, and from this dam the water was conducted through a circular conduit of brick, nine feet in diameter and having a fall of nine and one-half inches to the mile. In order to shorten the conduit and save expenses, a receiving reservoir was formed by damming the Little Falls Branch, a tributary of the Potomac, situated about five miles from Washington. With an area of little over fifty acres, it has a capacity of approximately eighty-five and a half million gallons, and is used for both storage and sedimentation. A distributing reservoir was constructed on the heights of Georgetown, about two miles from Washington, and connected with a receiving reservoir by a continuation of the conduit. The system was completed in 1863, and has been in continuous successful operation ever since.

One of the greatest problems that confronted the engineers was the placing of the conduit beneath the rock bluff which skirts the river from a point about a mile and a half below Great Falls to the intake at the dam. All but about a mile and a half of the conduit is laid under one of the finest roadways in the country. It is known as the Conduit Road, and is kept in prime condition by the War Department.

The famous Cabin John bridge, which, until the construction of a rival in Germany, was the largest single-arch stone bridge in the world, carries the conduit over Cabin John Run, and the Pennsylvania Avenue bridge, built on arches formed by the two mains which lead from the distributing reservoir to the city, carries the water over Rock Creek. The greater part of the water, however, now flows through the famous Lydecker tunnel to a reservoir on the heights to the north of the city, from which it is pumped into the new filter beds, and thence distributed throughout the city as pure water.

Breaking Ground. An Orange Peel Shovel Beginning the Work of Excavation.

The Portals of the Twin Tunnels Which Cross the River.

SANITATION OF THE CITY OF WASHINGTON.—I.

THE FILTRATION PLANT.—The water furnished to the residents of Washington by the water supply completed in 1863 was simply water from the Potomac River, collected in open basins and allowed to settle. To-day water that has been filtered at a cost of $450 a day, in a filtration plant that cost $3,468,405, is distributed through thousands of mains in the city to every fire plug and to the faucets in every house. It is still Potomac River water, but it has been cleaned and "screened" until it is as clear and sparkling as the finest spring water.

The filtration plant is one of the largest and finest filtration plants in the world. It is of the English or slow-sand type. The American, or mechanical system of filtration, which is considerably cheaper, was originally favored during the early discussion of plans, but owing to strong objection and protests against the use of a coagulant, usually alum, to precipitate the suspended matter, Congress passed an act specifying the English system. The estimated cost of filtration by this system is $6 per million gallons. The plant covers forty-five acres of ground, and in its construction 800,000 cubic yards of earth were removed, every yard by steam shovels. The filtering plant proper is divided into twenty-nine compartments of one acre each, and each bed holds 3,000,000 gallons of water. The filtering capacity of the plant is 75,000,000 gallons of water a day.

The method of filtration is quite simple. Preliminary sedimentation takes place in the Washington city reservoir, situated to the west of and quite near to the filter beds. This reservoir has a capacity of 300,000,000 gallons of water and in it much of the suspended matter is precipitated before the water is lifted by the pumps to twenty-five of the twenty-nine filter beds. The pumps deliver the water to the farthest sand beds, where it flows in at the top. From these it flows into other beds, being gradually cleaned by passing through three feet of clean, sharp sand and one foot of gravel. The water is finally collected by a carefully-planned system of under-drainage and piping and delivered to an inclosed storage reservoir. This reservoir has a capacity of 20,000,000 gallons, or about one-third of the filtering capacity of the plant. It has a cement floor and roof, supported by cement pillars.

The filter beds are thoroughly cleaned every three weeks. To accomplish this without interrupting the plant, only twenty-five of the twenty-nine beds are in operation at a time. The beds are so constructed that the supply of water to any particular bed may be cut off without disturbing the supply to the other beds. The cleaning process is going on in four of the beds all the time. About three inches of the surface is scraped off, and an equal amount of clean sand added. The water is then turned into the bed. The three inches of sand scraped from the surface is not entirely wasted. It is thoroughly cleaned in an elaborate system of sand-washing apparatus, and dried ready for use again. The sand lost in the cleaning process amounts to about five inches a year.

In order to be absolutely sure that the water issuing from the plant is pure, a completely equipped chemical and bacteriological laboratory has been established at the plant, and competent men are continually testing the water. The completed plant now resembles a great pathless park. The site presented a considerable grade toward the city, and the process of leveling left the tops of some of the beds above the street and some below. These were covered with concrete, and on this was packed two feet of earth, and practically the whole tract was sodded.

(To be concluded.)

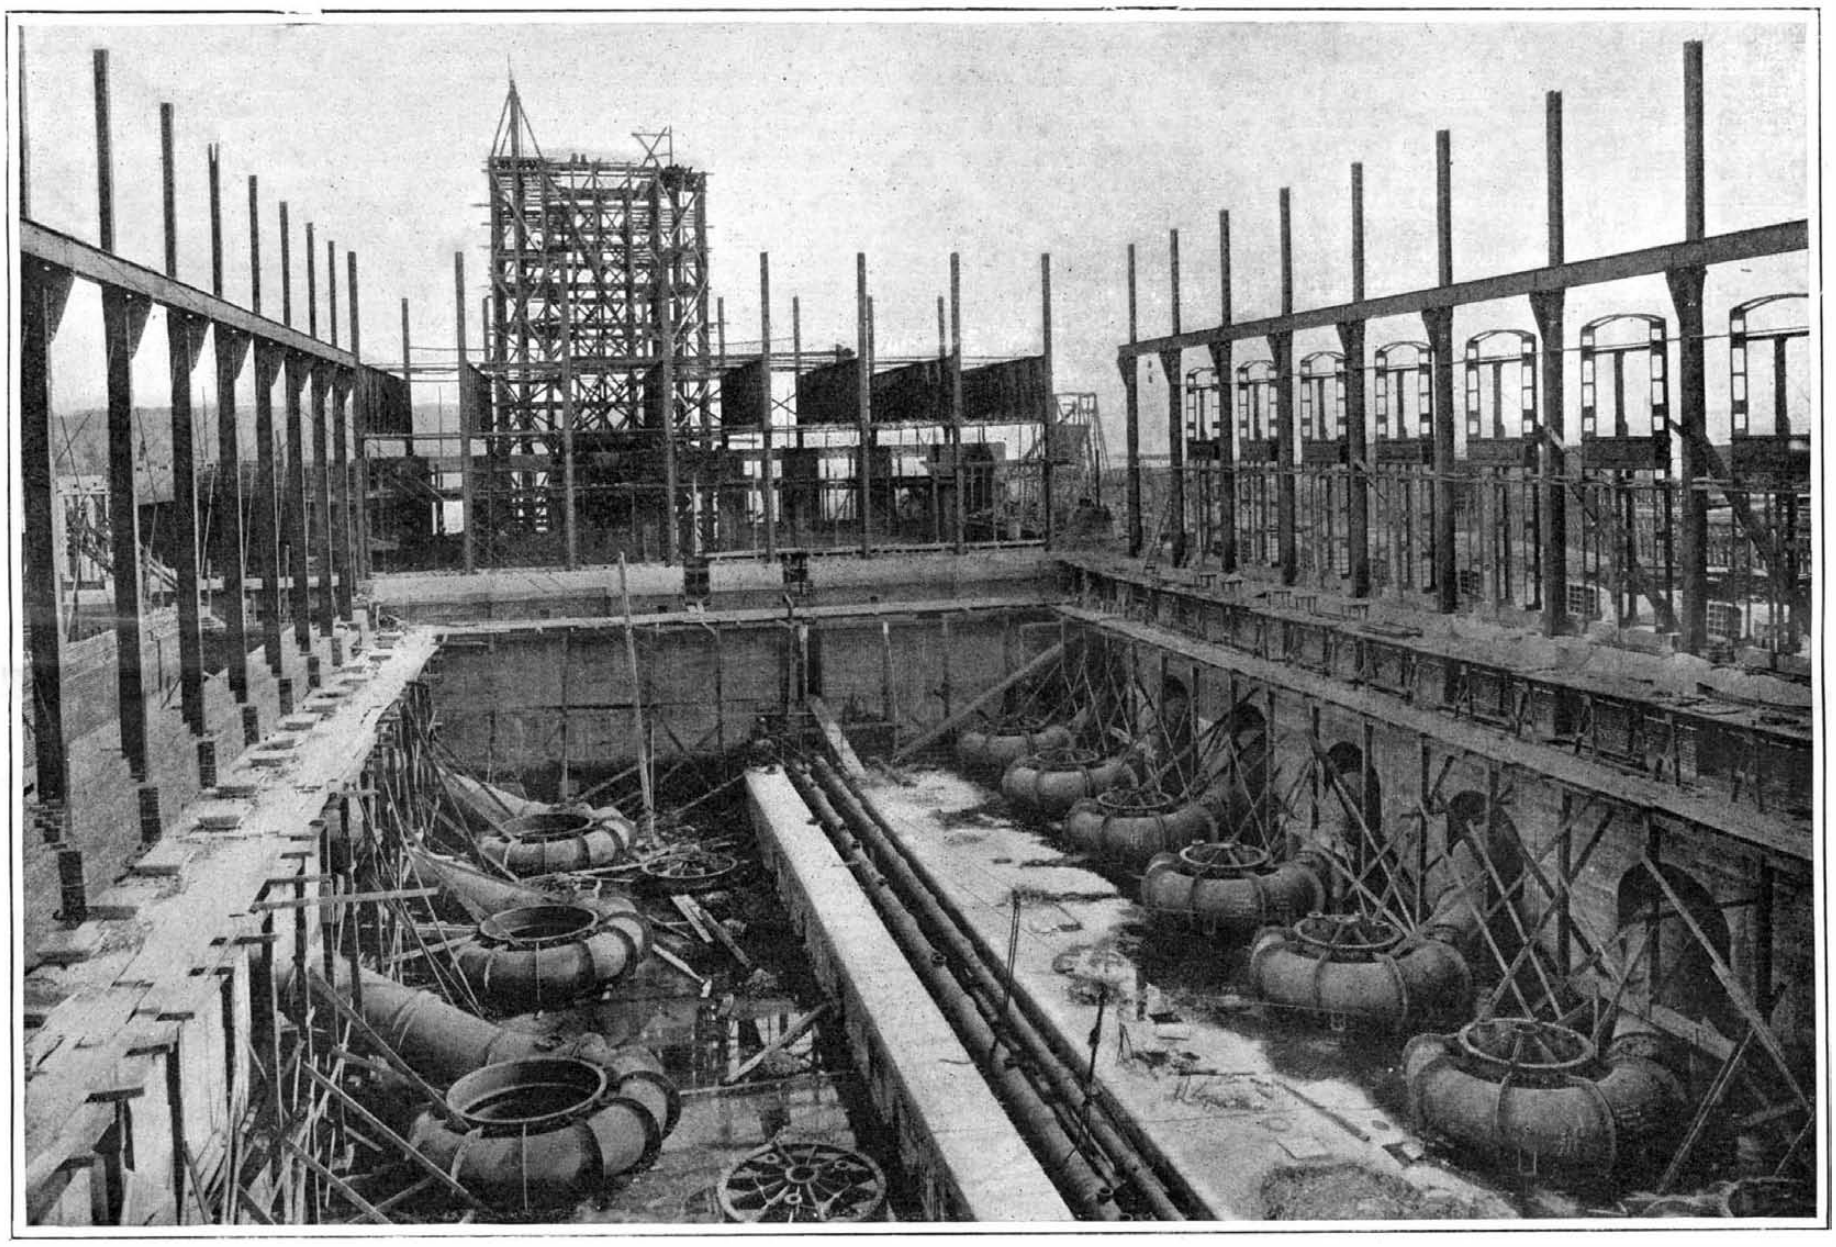

The Syphon Chamber.

SANITATION OF THE CITY OF WASHINGTON.—I.

A New Electric Lamp.

Consul E. T. Liefeld forwards from Freiberg an abstract from a Paris newspaper concerning a new electric lamp, which it is said will considerably better the present system of lighting. The article was wired from Vienna and reads:

An Austrian chemist, Dr. Hans Kuzel, has, after many years' hard work, succeeded in constructing a new electric lamp, which he calls the Syrius lamp. As is well known, incandescent gaslight is cheaper than electric light, because the carbon filaments of the latter are very expensive and the glass bulbs soon wear out. Doctor Kuzel has now invented a new substitute for the incandescent filament by forming out of common and cheap metals and metalloids colloids in a plastic mass, which can be handled like clay and which, when dry, becomes hard as stone. Out of this mass very thin filaments are then shaped, which are of uniform thickness and of great homogeneity. These two characteristics are of great value in the technics of incandescent lamps.

The Kuzel lamp, it is claimed, uses one-quarter of the electric current which the ordinary electric lamp with a filament wire requires. Experiments, it is asserted, have shown that the lamp can burn for thirty-five hundred hours at a stretch. Another advantage is that the intensity of the light of the new lamp always remains the same, the lamp bulbs never becoming blackened, as is now the case.

A Successful Trial of Santos-Dumont's Aeroplane.

Santos-Dumont's novel aeroplane, which we illustrated in our last number, and with which this well-known experimenter has been making tests by suspending it from one of his dirigible balloons and also by attaching it to a trolley running on a rope hung from two elevated points, had its initial test in a field near Paris early on the morning of August 22.

Carrying its noted inventor in the basket, the aeroplane, propelled by a 24-horse-power, 8-cylinder, V motor, skimmed along the ground on its wheels from one end of the field to the other and back again. Several times, during the run, it raised itself off the ground a short distance. Imperfect operation of the motor was given as the reason the machine did not soar; but from the photographs and dimensions of the propeller it would appear that this was also one of the main reasons. The propeller is much too small, apparently, to be capable of exerting much thrust, and a very considerable thrust (300 or 400 pounds) is necessary to elevate a machine of this kind.

After it gets in the air, moreover, the question of stability is a grave one. On account of the dihedral angle of the planes, Santos-Dumont's aeroplane should, however, have much better transverse stability than that used by the Wright brothers.

Road-tarring on a large scale has been seen in France during the preparation for the Grand Prix race. The tarring is carried out on the Lassailly system by the use of the most improved apparatus for heating the tar and applying it to the surface of the road. Commenced on the 25th of May, the operation lasted scarcely ten days for the 500,000 square yards which were covered, employing two gangs, each made up of six drivers and eight horses, together with eight men for spreading the tar, counting the men needed for sanding the road after the tarring. A fine road is the result of this operation, and it shows that by the use of the proper apparatus a large extent of road can be treated within a short time and with a small amount of labor. At the last moment the excess of sand which covers the layer of tar will be swept off by the four sweeper wagons employed by M. Lassailly, when the cars will be able to run under ideal conditions. Such a process, far from being an extra expense, is now recognized as an actual economy, seeing that the cost of keeping up the road becomes much less, and this pays for the tarring expenses, and may even exceed the latter, as has been found during a long series of observations made in France.

Correspondence.

"Fibered Cement" or Reinforced Concrete?

To the Editor of the Scientific American:

Would not "fibered cement" be a more fitting name to give to this new building material combination than "reinforced cement"? To the uninitiated this means a cement strengthened by the admixture of some other substance of like nature; one would hardly think that iron rods were used, and as these really form a fiber running through the cement, "fibered cement" would seem to be more appropriate, beside being easier to speak and write. In fact, would it not be as correct to say "reinforced iron" as "reinforced cement," as each substance strengthens the other about equally?

In this connection I want to suggest the use of bamboo, either the whole cane or split into strips. It is cheap, light, strong, and durable, and, I believe, does not swell when subjected to moisture, consequently there are many cases where it could be used in place of iron. Charles J. Sands.

Pasadena, Cal., August 7, 1906.

Dr. Wiley on the Pure Food Law.

To the Editor of the Scientific American:

It is only fair to your readers that many misstatements contained in the article on "Adulterated Food" in your issue of August 18 should be corrected.

I suppose that not one of your readers would be deceived in regard to the law by what was said respecting the action of the Senate, inasmuch as a law requires the concurrent action of the Senate, House of Representatives, and the President. Mr. Landon says in this article: "When the pure food law is enforced, it will compel the manufacturers of food stuffs to label their products." This is quite an erroneous statement, since the pure food law does not require anybody to label his products. It simply requires that products when labeled shall be correctly labeled, that compounds, imitations, and blends shall be so marked.

Mr. Langdon writes a great deal of covering for the kernel of his article, which is to induce the people to think that borax and boric acid are permitted preservatives, but this is not the case, as is shown by the recent regulations for the enforcement of the meat inspection act, in which all preservatives, with the exception of sugar, salt, spices, vinegar, wood smoke, and, pending further investigation, saltpeter, are prohibited. It is not likely that the regulations for the enforcement of the pure food law will contradict the meat inspection regulations. I may say, for the further information of your readers, the pure food law does not mention borax. It does permit the application of preservatives externally to food products when preparing for shipment, but if any of these preservatives should enter the substance itself, it could not be used under this provision. The same clause also requires that directions for removing the preservative before the food product is eaten shall accompany each package, thus specifically recognizing their harmfulness. Borax and boric acid, which, as stated by your correspondent, are allowed by the United States Senate to be used on meats, fish, and fowl, if used at all can only be used at the time of packing, only externally, and only when they are necessarily removed, and only when directions for such removal accompany each package. This does not seem to be in harmony with Mr. Langdon's statements.

Mr. Langdon is a very prolific writer on this subject and in every one of his communications the sole object in view is to secure the recognition of the use of borax and boric acid in foods. The latest work on this subject, namely, "Diet in Health and Disease," by Dr. Julius Friedenwald and Dr. Ruhräh, of the College of Physicians and Surgeons, Baltimore, Md., says:

"Borax and boric acid as preservatives are the subject of numerous conflicting opinions. It is possible that some of the favorable opinions have been issued by those who draw their salaries and their opinions from the same source. While it is stated by many that the use of these chemicals is not injurious, there are instances on record where they have caused severe symptoms and even death." H. W. Wiley.

Washington, August 23, 1906.

The Moth and the Flame.

To the Editor of the Scientific American:

The March 10 number of the Scientific American has an article on "The Moth and the Flame," which tempts me to recount some observations and experiments in this matter.

I will begin with the mosquito, which is a night flier, and yet pays no attention to the flame. In ill-lighted Chinese houses it will steal up for a bite any time of day; but in our dwellings it prefers a warm evening after lamps are lighted. One morning I smudged my study with some insect powder placed over a lamp, and I killed mosquitoes by the score as they danced around on the panes of the sunlit windows just as crazily as ever did a moth around a lamp. The same experiment also brought to the windows a dozen or more clothes moths, that usually avoid the light, and lurk in folds of garments or in chests and boxes; but the smudge made them want to get out, and they flew to the windows, and settled down on the panes just as flies do when they try to go through a window and are stopped by the glass.

But the honey bee will fly the hardest at a window pane by day or a lamp by night. It gathers honey in the brighest sunlight; but deposits it in a dark hive, in which lightward always means outward—exit—while darkward means inward. This has been their unchanging experience for untold generations. Bees frequently come into the house, and as the windows are the best-lighted parts of the walls, they try to go out through these instead of the door at which they came in.

One such bee began so late in the day that the twilight found it still vigorous; but as the window grew darker it gradually relaxed its efforts, and finally left the glass for the white jamb, still buzzing occasionally. After supper I set a shaded lamp on the window sill, and the bee flew at the lamp chimney several times, but each time it instantly recoiled from the heat. Once, however, it flew up against the bright nickel-plated base of the burner, and buzzed against it for a number of seconds, just the same as it had buzzed against the window pane by daylight.

Once, when I opened the window to let out a buzzing bee, a partly-closed blind prevented the light of the crack between sash and casing from reaching the bee; but there was a line of light on the jamb opposite the crack. The bee continued to buzz against the pane till I covered it up, and then it flew to the streak of light on the jamb, and tried to go through that; and then it turned and flew out through the crack. Next day I found a moth on the window, and when the window opened, it went through the same motions as the bee had, clinging to the pane till this was covered, then flying to the streak of light, and then at last going out through the crack.

Thus we see that under like conditions moth and bee behave alike; but a part of the moth's "craziness" is due simply to its zigzag manner of flight. In not a few cases where I have seen a moth fly into the flame of my clock lamp, it has been due to its zigzagging while circling around the blaze. There is also one potent element in the situation at night which is wanting in the daytime. Set a lamp in an open window at night, and note how black it makes the darkness appear. It is such a blackness as would ordinarily indicate a solid obstacle; and so when a night flier comes within the range of the light, the darkness seems to it to become a solid wall inclosing it on every side, with no outlet except toward the light. Hence it is that on a warm evening, with windows and blinds wide open, moths begin to come in; but they rarely go straight to the lamp. Many of them go first to the white wall, and afterward come nearer and nearer to the lamp; but most of them settle down at last on the walls, and remain there motionless the rest of the evening. In a dingy Chinese house the lamp attracts more directly to itself than it does in our white-walled houses.

One evening I found in my bedroom a young sparrow, which instead of flying at the window panes as it would have done in the daytime, flew at the white jambs and at the white walls. When I cornered it with a shaded lamp in my hand, it flew up against the chimney and fluttered around inside the shade. Then it perched on one of the brass arms of the shade; and when I reached in my hand to take it, it fluttered to the floor, where I grabbed it, and taking it to an open window set it on the window sill. There it squatted till I, in turning away, threw my shadow on it; and then in an instant it fluttered out into the darkness.

Shaowu, China, June 1, 1906. J. E. Walker.

Production of an Electrically Conductive Glass.

Experiments have from time to time been made, both in England and abroad, to ascertain what ingredients are best for the purpose of producing glasses of very high electrical resistance.

The utility of a vitreous substance which would conduct electricity comparatively well does not appear, however, to have so far claimed any consideration.

Attention should be directed to a glass which has recently been made in my laboratory. Its chief feature is that it really conducts electricity.

For the windows or cases of electroscopes and all high-tension apparatus requiring a transparent cover capable of screening off external electrical fields, this material offers many advantages. A conducting varnish is no longer required for glass which conducts electricity itself. In addition to these practical considerations, there arises the interesting question as to the process by which electricity passes through this substance—whether it is electrolytic. Its resistance varies very markedly with temperature changes. The basis of the glass is sodium silicate.—Charles E. S. Phillips in Nature.

A Mosquito Brief.

The American Mosquito Extermination Society has recently published a brief on the subject of mosquitoes which is worth repeating on account of the practical condensed information given. The card is illustrated with the various phases of the generation of the mosquito as well as of the common and fever-communicating species. It states:

1. There are over one hundred species of mosquitoes in the United States.

2. Mosquitoes breed only in water. They may breed in any kind of quiet water unstocked with destroying fish.

3. Mosquitoes generally require from one to three weeks to develop from eggs to winged insects in warm weather; longer in cold weather. Some female mosquitoes three days old lay eggs; the average is greater. Some species lay as many as three or four hundred eggs at once, some lay them singly. Mosquitoes may live several months (as shown by hibernation and otherwise), but probably few live over a month.

4. Mosquitoes do not breed in grass, but rank growths of weeds or grass may conceal small breeding puddles, and form a favorite harboring place for adults. The pitcher plant holds sufficient water to breed a rare and small species.

5. Different species of mosquitoes have as well defined habits as different kinds of birds, flies, etc. Some are domestic, some wild, some migratory.

6. Most domestic mosquitoes breed in fresh water, fly short distances, and habitually enter houses.

7. Most migratory mosquitoes breed in salt and brackish marsh areas, and fly long distances. They are not conveyors of malaria.

8. Rigid tests, both direct and eliminative, have proved that certain species of mosquitoes are the only known natural means of transmitting malaria and yellow fever. Some other diseases are known to be conveyed by mosquitoes.

9. Of the domestic varieties, the dangerous malarial mosquitoes (several species of the genus *Anopheles*) are among the most generally distributed. They seem never to travel far, only a few hundred yards.

10. A most common and dangerous domestic mosquito in the South and the tropics is *Stegomyia fasciata*, which is the natural conveyor of yellow fever.

11. Mosquitoes are known to bite more than once, as can be seen by observation and is proved by the transmission of disease from an infected person to a new subject.

12. Mosquitoes are a needless and dangerous pest. Their propagation can be largely prevented by such methods of drainage or filling of wet areas, removal, emptying, or screening of water receptacles, spraying standing water with oil where other remedies are impracticable. Attention should be paid to cisterns, house vases, cesspools, road basins, sewers, watering troughs, roof gutters, old tin cans, holes in trees, marshes, swamps, and puddles. As malarial mosquitoes may be bred in clear springs the edges of such places should be kept clean, and they should be stocked with small fish. The breeding and protection of insectiverous birds, such as swallows and martins, should be encouraged. Thorough screening of houses and cisterns is necessary to prevent the spread of malaria or yellow fever. The continued breeding of any kind of mosquitoes, with the attendant menace to public health and to the life and comfort of man and beast, is therefore the result of ignorance or neglect.

The Current Supplement.

As a valuable example of modern bridge construction the Thebes (Illinois) railway bridge deserves more than passing attention. In the opening article of the current Supplement, No. 1600, Mr. Charles Alma Byers discusses the structure. Good illustrations accompany his text. Some valuable statistics are published on the production, imports, and exports of iron and steel. Two new processes in color photography have been developed in Germany, which are known respectively as pinachromy and pinatype. They are not only of interest to the student of chemistry and physics, but are distinct and important advances in the reproduction of objects in their natural colors. These processes are ably described by Mr. H. A. Metz. Another curious photographic process is that which is known as the ozobrome. In this process a bromide may be combined with a carbon print with permanent and valuable results. Mr. F. R. Coles writes entertainingly on candlesticks of other days. Prof. Ray Lankaster's presidential address delivered to the British Association is continued. In this installment he concludes his discussion of radium and radio-activity and gives a general review of progress in chemistry, astronomy, geology, and animal and vegetable morphography. Some remedies and preventives against house flies are published. Felix Erber writes on the mysterious planet Saturn. An instructive article is that on the nutritive value of cereal breakfast foods. Emil LeLong gives a very good illustrated explanation of chain-making machinery.

REVIEW OF THE ATLANTIC FLEET BY THE PRESIDENT.

It takes but a glance at the names of the forty-five ships of the Atlantic fleet which will be reviewed by the President at Oyster Bay on September 3 to realize that this is by far the most formidable assemblage of American warships that has figured on an occasion of this kind. In the various squadrons and divisions will be found representatives of all the latest types of the warships of the United States navy, from the great "Louisiana" of 16,000 tons displacement down to the weird and ever-mysterious submarine of 120 tons. Incidentally the review will serve to present in concrete form a history of the growth of our navy during the past fifteen years. The fleet will be remarkable also because of the fact that it will include not a single ship that can be called strictly obsolete; for the "Indiana" and "Iowa," which date respectively from 1891 and 1893, are sufficiently up-to-date to form very valuable elements in the defense of our coast line and harbors. With the exception of the monitor "Puritan," which, although originally commenced in 1875, was not completed and put into commission until 1896, the oldest fighting ship in the fleet will be the "Indiana," whose keel was laid in 1891, and which received its first commission in 1895. The most important ships (and this is particularly true of the battleships and armored cruisers) have been built since 1901, and the most formidable of these have been put in commission during the past twelve months.

Looking at the fleet as a whole, one is impressed with the very gratifying fact that the bulk of the displacement is made up of battleships and armored cruisers—the types which must fight and win the battles of the present day. With the exception of the "Minneapolis," there is fortunately in the fleet no evidence that our naval constructors and naval secretaries have been afflicted with false ideas as to naval strategy—not, at least, as regards the possibility of winning naval campaigns by hunting for and destroying an enemy's maritime commerce. First and last, the winning of individual sea fights, and the successful prosecution of naval campaigns, will lie with the nations which can put upon the high seas the largest number of well-armed and well-protected battleships and cruisers. If the recent Russo-Japanese war taught one lesson more than any other, it was surely this; and it was only when the flower of the Russian navy, consisting of its latest and most powerful battleships, had been sunk or captured in the Sea of Japan, that the Russian government was willing to consider terms of peace.

The fleet that will gather at Oyster Bay on September 3 will consist of twelve battleships, four armored cruisers, four monitors, four protected cruisers, six destroyers, six torpedo boats, two submarines with their tender, a troopship, provision ship and water ship, and three colliers. By far the most formidable of the battleships is the 16,000-ton "Louisiana," which has recently been completed and placed in commission. With her armament of four 12-inch, eight 8-inch, and twelve 7-inch guns, she is probably the most heavily armed battleship afloat to-day, her only close competitors being the two British ships "Lord Nelson" and "Agamemnon," which, on about the same displacement, carry four 12-inch and ten 9.2-inch guns. Next to the "Louisiana" in power are three battleships of the "Georgia" class, the "New Jersey," "Virginia," and "Rhode Island." These vessels are of about 15,000 tons displacement and all have developed on trial more than their contract speed of 19 knots an hour. Each carries the same armament as the "Louisiana," except that the secondary battery consists of twelve 6-inch in place of twelve 7-inch guns. They are easily distinguishable from the "Louisiana" by the fact that four of the 8-inch guns are mounted upon the roofs of the turrets of the 12-inch guns, a device which also appears in the sister ships "Kentucky" and "Kearsarge," vessels of 11,520 tons displacement and between 16 and 17 knots speed. In the latter ships the main battery of 13's and 8's is carried in two double turrets on the center line, while the battery of fourteen 5-inch guns is mounted in a central broadside battery protected by 5½ inches of armor. About 1,000 tons larger than the "Kentucky" and "Kearsarge" and with nearly two knots higher speed, and the advantage of having been built some four years later, the battleships "Maine" and "Missouri" must be considered to be greatly superior. Each carries four 12-inch guns in two turrets on the center line of the ships, and a powerful broadside battery of sixteen 6-inch guns.

The "Maine" and "Missouri" are improved designs based upon the plans of two other battleships which will figure in the review, namely, the "Alabama" and the "Illinois," each of which is 11,552 tons displacement, and 17½ knots speed. They carry four 13-inch guns in two turrets and a secondary battery of fourteen 6-inch guns mounted in broadside within the central redoubt. When the plans for the "Maine" and the "Missouri" were first drawn, it was decided to give them the same size, displacement, and speed as the "Alabama" class; but, fortunately, as the result of an agitation against building battleships of such low speed as 17 knots, it was decided to lengthen these ships so as to accommodate larger engines and boilers and a more numerous 6-inch battery. The "Alabama" and "Illinois" are easily recognizable by the fact that they are the only American battleships which carry their funnels abreast of each other. The other two battleships in the fleet will be the "Indiana," one of the first three battleships to be built under the modern construction period of our navy, and the "Iowa," an improved "Indiana." The "Indiana" is a little over 10,000 tons trial displacement, has (or rather had) a speed of 15½ knots, and she mounts an armament of four 13-inch, eight 8-inch, and four 6-inch guns. The "Indiana" and her sisters were the first American battleships (or battleships of any nationality, for that matter) to introduce the system of mounting a secondary battery of heavy guns in four turrets at the four corners of the central redoubt—a plan which has excellent tactical features, since it renders it possible to deliver an unusually heavy all-round fire. One great fault in the "Indiana" class was that for the heavy battery that was carried the ships were altogether too small and the freeboard too low. In the "Iowa" the freeboard was raised by the construction of a forecastle deck, the 8-inch guns in four turrets were retained, and 12-inch guns were substituted for the 13-inch.

Unquestionably the handsomest group of vessels at the review will be the four large armored cruisers of the "Georgia" type, namely, the "West Virginia," "Pennsylvania," "Colorado," and the "Maryland." With their great length of over 500 feet, their graceful sheer, and impressive row of lofty smokestacks and towering masts they are, to our thinking, the handsomest warships afloat upon the high seas to-day. They are of absolutely identical design, and carry about the same coal supply and the same armament; hence they will have all those advantages in action which come from homogeneity. The later vessels of this type, of which the "Washington" and "Tennessee" are the first, will differ from them to the extent of having about 1,000 tons more displacement, and of carrying four 10-inch in place of four 8-inch as the main battery. This represents a great increase in power, and will render these vessels capable of taking their place in the first line of battle.

Of the four monitors, the "Puritan," although about double the size of the other three, is the least formidable, her guns and armor being of an earlier type of low penetration and resistance. Although the "Nevada," "Florida," and "Arkansas" mount only two 12-inch guns against the "Puritan's" four, they are more efficient weapons with higher velocity and greater penetration. It is certain that no more of the monitor type will be built, their low freeboard rendering them quite unfit for anything but harbor defense and such operations as can be carried out in still water.

Among the protected cruisers the "Minneapolis," whose keel was laid just fifteen years ago, will loom up large and apparently formidable. She is chiefly remarkable for the fact that she is the fastest cruiser in our navy, or to speak more correctly, she is credited with having made the fastest speed on trial, averaging 23.1 knots per hour. She was built as a commerce destroyer, and her armament is, therefore, very light, consisting of only one 8-inch and two 6-inch guns, besides some smaller rapid-firers. She is an expensive vessel to run, and in the present day, when there are armored cruisers of other navies afloat that greatly exceed her present speed, she is regarded in our navy as something of a white elephant. The other three protected cruisers, the "Tacoma," "Cleveland," and "Denver," vessels of 3,200 tons, 16½ knots speed, carrying ten 5-inch guns, are comfortable little craft that were designed more particularly for peace duties in foreign waters. For modern purposes their battery is too light, and their protection insufficient; consequently they would not figure largely in any future naval campaign, being too weak for effective fighting against modern armored craft, and altogether too slow for scouting purposes. It is certain that the type will never be repeated.

A feature of the review that is sure to excite the interest of the public will be the large number of destroyers and torpedo boats that will be present, there being altogether a dozen of these fleet little craft under orders to take part in the pageant. The six

THE ATLANTIC FLEET TO BE REVIEWED BY THE PRESIDENT AT OYSTER BAY, SEPTEMBER 3, 1906.

No.	Name.	Type.	Displacement, Tons.	Speed, Knots.	Coal, Tons.	GUNS. 13 in.	12 in.	10 in.	8 in.	7 in.	6 in.	5 in.	4 in.	3 in.	Small Guns	ARMOR. Belt.	Deck.	Turrets.	Casemates.	Torpedoes.	Keel Laid.
1	Maine	Battleship.	12,500	18	1,875		4				16			6	18	11 in.	2½ in.	12 in.	6 in.	Two—18 in.	1899
2	Missouri	"	12,500	18.2	1,825		4				16			6	14	11 "	2½ "	12 "	6 "	Two 18 "	1900
3	Kentucky	"	11,520	16.9	1,500	4			4			14			38	16½ "	2¾ "	17 "	5½ "	Four—18 "	1896
4	Kearsage	"	11,520	16.8	1,500	4			4			14			34	16½ "	2¾ "	17 "	5½ "	Four—18 "	1896
5	Louisiana	"	16,000	18.8	2,200		4		8	12				20	28	11 "	3 "	12 "	7 "	Four—21 "	1903
6	Rhode Island	"	14,948	19.5	1,700		4		8		12			12	30	11 "	3 "	12 "	6 "	Four—21 "	1902
7	New Jersey	"	14,948	19.5	1,700		4		8		12			12	30	11 "	3 "	12 "	6 "	Four- 21 "	1902
8	Virginia	"	14,948	19.5	1,700		4		8		12			12	30	11 "	3 "	12 "	6 "	Four—21 "	1902
9	Alabama	"	11,552	17	1,275	4					14				30	16½ "	2¾ "	14 "	5 "	Four—18 "	1896
10	Illinois	"	11,552	17.5	1,275	4					14				28	16½ "	2¾ "	14 "	5 "	One—18 "	1897
11	Indiana	"	10,288	15.5	1,475	4			8		4				29	18 "	2¾ "	15 "	5 "	One—18 "	1891
12	Iowa	"	11,346	17.1	1,650		4		8				6		30	14 "	2¾ "	17 "	5 "	Two—14 "	1893
13	West Virginia	Armored Cruiser.	13,680	22.2	1,950				4		14			18	30	6 "	4 "	6½ "	6 "	Two 18 "	1901
14	Pennsylvania	"	13,680	22.4	1,825				4		14			18	30	6 "	4 "	6½ "	6 "	Two 18 "	1901
15	Colorado	"	13,680	22.2	1,825				4		14			18	30	6 "	4 "	6½ "	6 "	Two—18 "	1901
16	Maryland	"	13,680	22.4	1,950				4		14			18	30	6 "	4 "	6½ "	6 "	Two—18 "	1901
17	Puritan	Monitor.	6,060	12.4	306		4						6		10	14 "	2 "	8 "			1875
18	Nevada	"	3,225	13	338		2						4		13	11 "	1½ "	10 "			1899
19	Florida	"	3,225	12.4	355		2						4		13	11 "	1½ "	10 "			1899
20	Arkansas	"	3,225	12	344		2						4		13	11 "	1½ "	10 "			1899
21	Minneapolis	Provision Cruiser.	7,350	23.1	1,400				1		2				17		4 "		4 in.		1891
22	Tacoma	"	3,200	16.6	675							10			15		2½ "				1900
23	Cleveland	"	3,200	16.5	675							10			15		2½ "				1900
24	Denver	"	3,200	16.8	675							10			15		2½ "				1900
25	Whipple	Destroyer.	433	28.2	177									2	6					Two—18 "	1899
26	Worden	"	433	29.9	177									2	6					Two—18 "	1899
27	Truxton	"	433	29.6	177									2	6					Two—18 "	1899
28	Hopkins	"	408	29	154									2	5					Two—18 "	1899
29	Lawrence	"	446	28.4	110										7					Two—18 "	1899
30	MacDonough	"	430	28	110									2	5					Two—18 "	1899
31	Wilkes	Torpedo Boat.	165	26	66										3					Three—18 "	1899
32	Tingey	"	165	25	70										3					Three—18 "	1899
33	Rogers	"	142	24.5	44										3					Three—18 "	1896
34	Stockton	"	200	25.8	79										3					Three—18 "	1899
35	Blakeley	"	196	25.6	72										3					Three—18 "	1899
36	DeLong	"	196	25.5	72										3					Three—18 "	1899
37	Porpoise	Submarine.	120	8—5																Five—18 "	1900
38	Shark	"	120	8—5																Five—18 "	1903
39	Nina	Tender.		11.1	80																1865
40	Yankee	Troopship.	6,225	12.5	1,100							8			10						1892
41	Celtic	Provision Ship.	8,000	10.5	*										2						1891
42	Arethusa	Water Ship.	6,200		†										1						1893
43	Abarenda	Collier.	4,670	9	3,400										8						1892
44	Lebanon	"		10	1,800																1894
45	Leonidas	"	4,242	8.5	2,200										1						1898
						20	38		73	12	158	66	24	150	645					84	

* Celtic carries 2,500 tons of supplies.

† Arethusa carries 850,000 gallons of water.

destroyers are of the general type that did such good work for the Japanese in the late war, although they are somewhat larger in displacement. The trial speeds ranged from 28 to 29.9 knots an hour, and each is armed with two of the formidable 18-inch Whitehead torpedoes. The torpedo boats are of the first class, with a displacement of from 142 tons in the "Rogers" to 200 tons in the "Stockton," and the speeds average about 25½ knots an hour. Last, and in point of spectacular interest, perhaps, the most attractive to the layman, will be the two submarines "Porpoise" and "Shark." They represent a method of naval warfare which, after a long and discouraging struggle for recognition, has now established itself, and promises to figure very largely in such future naval operations as concern the attack and defense of fortified harbors and roadsteads.

Finally, there will be seven auxiliary ships, including the "Yankee," a troopship of over 6,000 tons; the 8,000-ton Celtic—a provision ship capable of carrying 2,500 tons of supplies; the 6,200-ton water ship "Arethusa," whose tanks can hold for the use of the fleet 850,000 gallons of fresh water; and the three colliers, "Abarenda," "Lebanon," and "Leonidas," which between them can carry 7,400 tons of coal for the replenishing of the bunkers of the warships.

Summing up the fleet as a whole, the total figures are decidedly impressive. The forty-five ships represent a total displacement of 274,251 tons, carrying in its bunkers and in the holds of the colliers a total of 41,881 tons of coal. In the whole fleet are mounted twenty 13-inch, thirty-eight 12-inch, seventy-three 8-inch, twelve 7-inch, one hundred and fifty-eight 6-inch, sixty-six 5-inch, twenty-four 4-inch, one hundred and fifty 3-inch, and six hundred and forty-five rapid fire and machine guns. For torpedo attack there are carried about one hundred 18-inch and 21-inch torpedoes. The fleet will be assembled under Rear Admiral Robley D. Evans, as commander-in-chief, who will hoist his flag on the battleship "Maine," and the personnel will include 812 officers and 15,235 men.

Humanity and Machinery.

Machinery is the cornerstone of modern society, the very foundation on which law, science, ethics, the arts, even the state itself, rests. It is so new that we do not yet know its poetry. We do not yet understand. Only two generations have lived beside the highway of steam; only one has seen the Bessemer converter transform the blacksmith into a master builder of ships and towers. The sewing machine, the far speaker, the typewriter are common things of to-day, accepted as a matter of daily convenience, and yet are they teachers of the people. Machines that come close to our lives and homes insensibly teach truth, precision, the adjustment of universal laws to human needs, respect for that wise American idea that labor saved is labor released for higher and nobler toil. The machine is the head master of the high school of the race.—Reader Magazine.

WRECK OF THE DULUTH-SUPERIOR DRAWBRIDGE.

The two photographs which we publish of the important Duluth-Superior Bridge, otherwise known as the Interstate Bridge, show with very dramatic effect that a structure of this kind, in spite of its great size, weight, and apparent stability, is only strong and stable when the stresses applied to it act directly in the planes of the trusses and along the axes of their various members. They also show how great is the momentum existing in a large steamship even when, as in the present case, the speed has been reduced almost to the stopping point—a lesson which should be taken well to heart at the present juncture, when the question of the best location of the Panama locks is under active discussion.

The Interstate Bridge was built in the year 1893, and consists of two large shore spans, and a center draw span with a length over all of 500 feet (which renders it one of the largest, if not the largest draw span in the world), the clear opening for shipping on each side when the span is swung clear for traffic, being 220 feet. The accident occurred on August 11, at 1 o'clock in the morning, and was due to collision with the structure of the steamer "Troy" of the Western Transit Company. The steamer was approaching the draw slowly, and although the captain noticed that the operator on the bridge was tardy in opening the same, he continued under a slow bell in the expectation that, as is usually the case, the span would be swung clear with a rather small margin of time for the passage of the ship, this, according to his statement to the press, having been the common practice. When he discovered that the collision was inevitable, he backed his engines, the effect of which was to slow down the ship, and swing her bow from the center to the side of the channel, with the result that she struck the draw span about 20 feet from the central pier on the Superior side. It is easy to see from the photograph the nature of the collapse. The stem of the steamer struck the bottom chords (which, of course, at this point are members that are always in compression), cutting through them and causing that arm of the draw to sag into the river. The other arm followed suit almost immediately, the whole draw span settling into the position shown in the photograph. The impact of the ship was sufficient to push the whole structure over on its bearings, throwing the heavy supporting frame of girders below the central tower, and the turntable, out of plumb. One immediate effect of the disaster was to completely tie up both the water traffic in the harbor and the land traffic across the bridge itself.

Judging from the interviews given in the local press, it would seem that very grave chances have been taken in the use of this draw span, both on the part of the bridge crew and of the ships that pass through. Where masses of such great total weight have to be moved, it is courting disaster to allow only a small margin of time between the opening of the draw and the passage of the ships; and this is a fact which holds true, not merely in connection with this structure, but in others of equal importance that are to be found spanning our great waterways. A limit of distance should be imposed, nearer than which no ship should approach an important draw until it is swung entirely open and the channel is clear for passage.

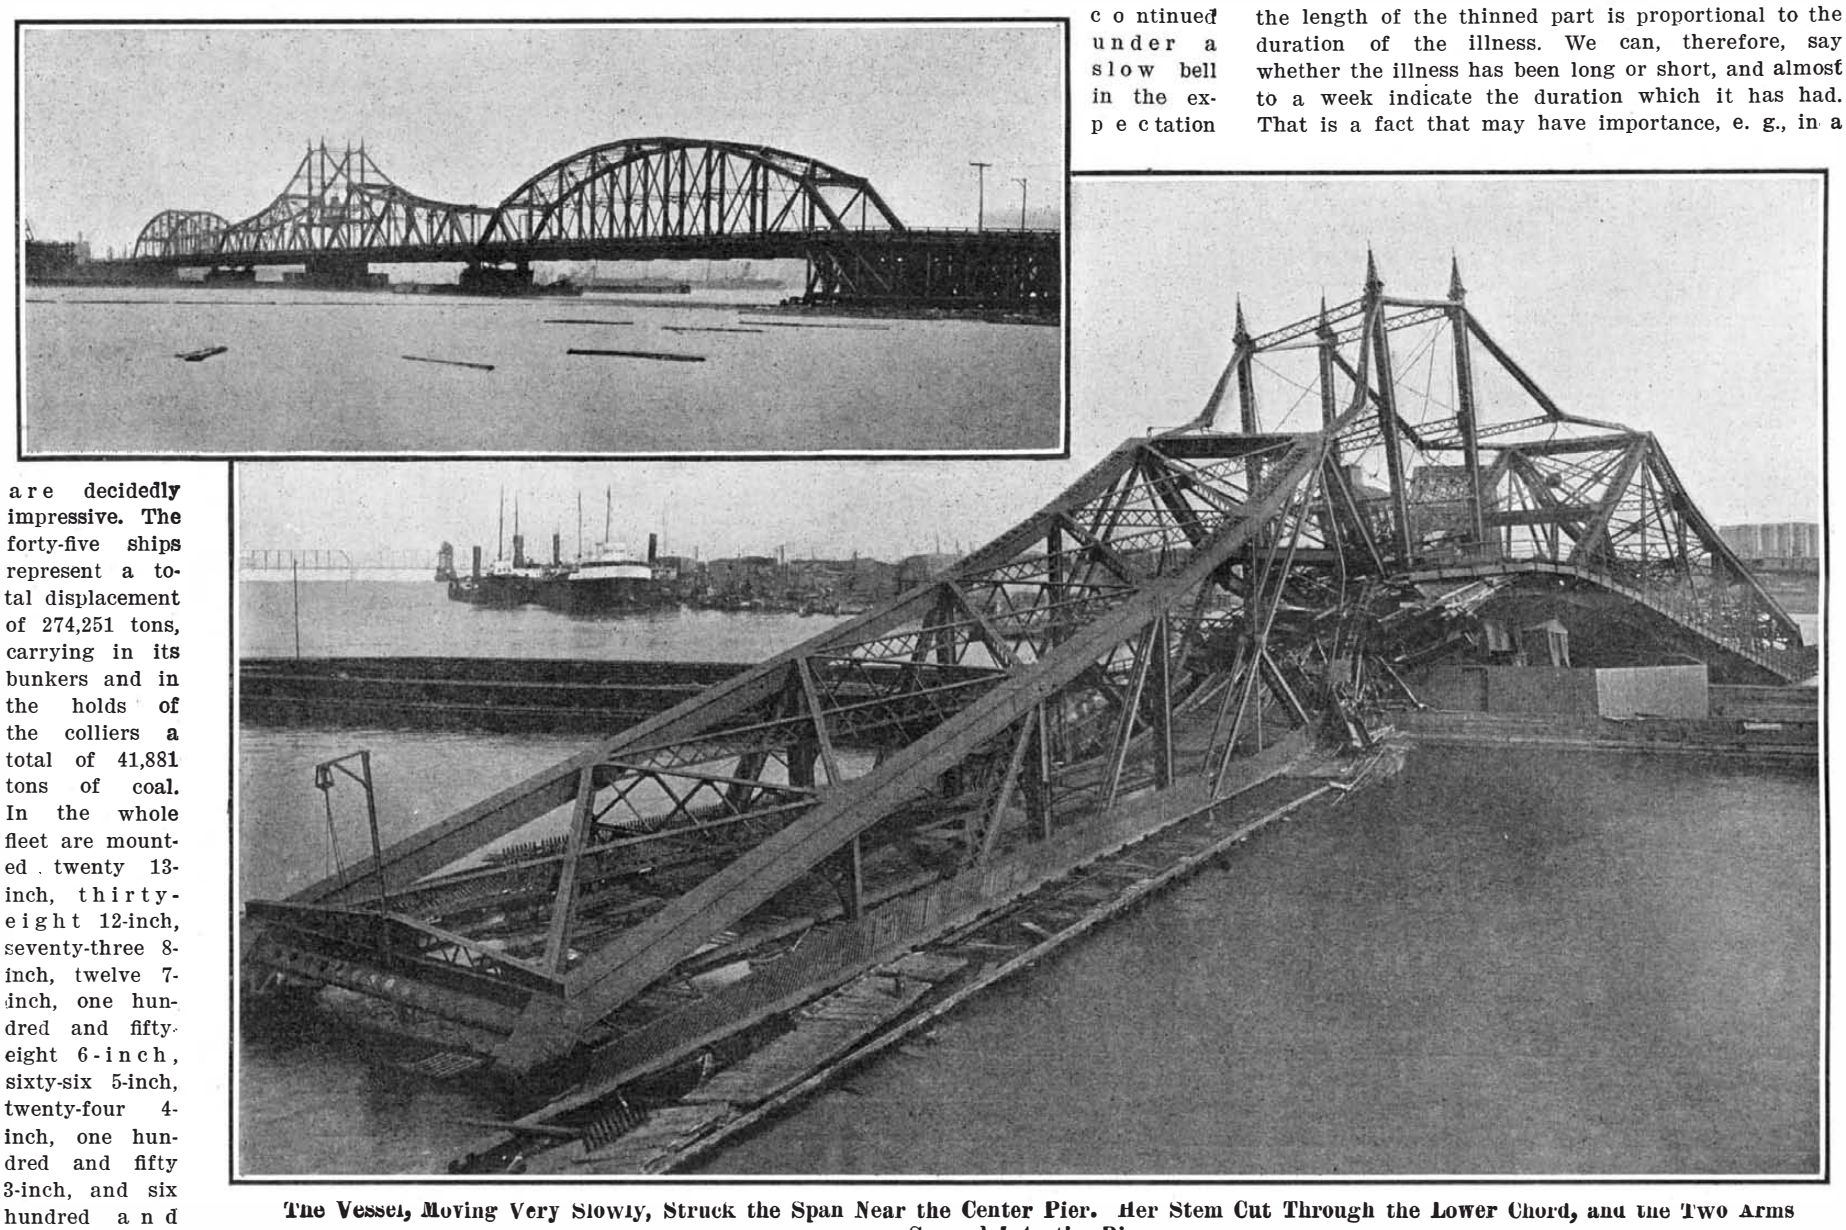

The Vessel, Moving Very Slowly, Struck the Span Near the Center Pier. Her Stem Cut Through the Lower Chord, and the Two Arms Sagged Into the River.

WRECK OF THE LARGE DULUTH-SUPERIOR DRAW SPAN, 500 FEET LONG, BY A COLLIDING STEAMSHIP.

The Hair an Indicator of Health.

A Japanese physician, starting with the fact that illnesses exercise a notable and well-known influence upon the growth of the nails both in length and thickness, asked himself if the hair too might not be affected by sicknesses. The result of his investigations is, that every general illness diminishes the diameter of the hairs. The medullary layer may even be wanting, and it happens to the peripheric hard envelope to disappear. The influence of illnesses is sometimes more marked in the races or the individuals that have coarse, thick hair. In this case, it is easy by the inspection of a hair to know if the person who furnished it has recently passed through a general illness. The hair is made thinner along a part of its length, and the length of the thinned part is proportional to the duration of the illness. We can, therefore, say whether the illness has been long or short, and almost to a week indicate the duration which it has had. That is a fact that may have importance, e. g., in a question of identification. From the biological point of view it is, moreover, interesting to find that a hair behaves like the nails. But that was to be expected.—L'Illustration.

Duration of Flashes of Lightning.

We possess as yet only pretty vague data as to the average duration of flashes of lightning, says L'Illustration. Faraday thought he could fix it at a second. Dufour claimed that the flashes of lightning were instantaneous, and that their rapid succession gave the illusion of one flash of a certain duration. Herr Schmidt has just been devoting himself to a series of observations, employing a disk of ten centimeters diameter bearing upon a black ground a white cross, the arms of which were two millimeters across, the disk being set in motion by clockwork with a speed of 50 to 60 revolutions a second. At certain flashes, the cross appeared a single time, very distinct; the duration of lightning was, therefore, inferior to the time of revolution of the disk, which would represent about the fiftieth of a second. In more numerous cases, the cross appeared two or three times, or even more, but with a decreasing luminous intensity; the lightning had, therefore, lasted during several revolutions of the disk.

BRICK AND TILE MAKING IN THE TROPICS.

BY C. C. FULLER.

Many readers of the SCIENTIFIC AMERICAN are familiar with the primitive "adobe," or sun-dried, bricks and the process of making them. Such bricks are extensively used to-day in many countries where the climate is dry and heavy rains are almost unknown.

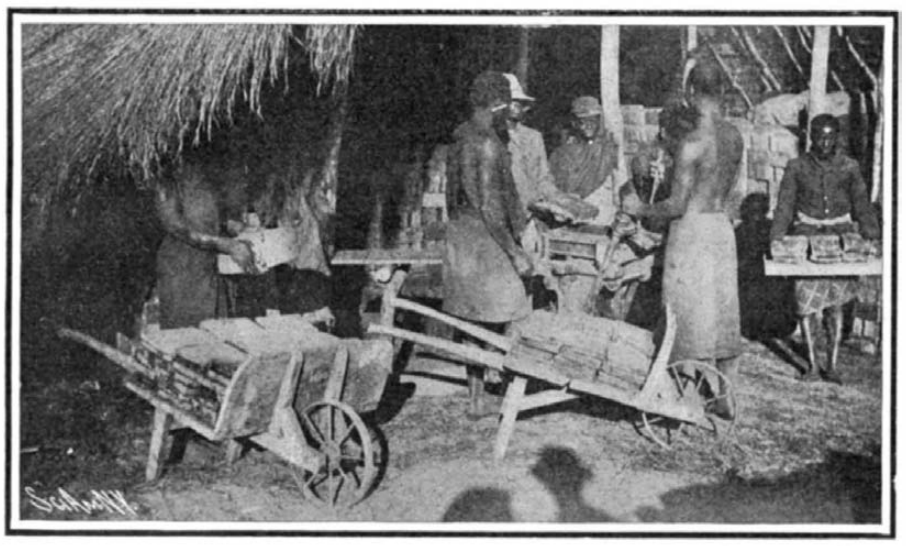

An Immense Shed of Thatched Grass Protected the Bricks.

The Pug Mill Stood Between the Pits.

In the tropics, however, the annual rainy season makes their use impracticable except in very small buildings, where they can be entirely protected by wide verandas.

The brickmaker in the out-of-the-way districts, under the conditions in Rhodesia and most tropical countries, is confronted by a serious problem, into which a number of elements enter, such as the enormous cost of installing modern machinery, the lack of skilled labor, occasional torrents of rain even in the dry season, and, in many places, the poor materials available.

Throughout South Africa, outside of the modern cities, a kind of hand-made "slop" brick has been used for many years by both Dutch and English colonists, and many fairly substantial buildings are built of them. But with the introduction of modern machinery and methods into the cities, there has grown a demand for better bricks in the back-country districts, especially from those accustomed to the advanced methods in the United States, and here and there small machines have been installed.

It is only eleven years since the American Gazaland Mission was established at Mount Silinda in the mountains of southern Rhodesia, about 200 miles inland from Beira on the east coast and 150 miles south of Umtali on the Beira and Mashonaland Railway, which connects at Salisbury with the Cape to Cairo Railway. The isolated position, and consequent great expense of transporting supplies, made it necessary to use materials on the ground in the construction of the mission buildings, and common "slop" brick were used in all the older ones. Necessity, the mother of invention, led to the manufacture of flat shingle tiles, made entirely by hand, which are fairly satisfactory for roofing purposes, but very easily broken in comparison with the pressed tiles used in Europe and America.

Three years ago the writer was sent out by the American Board of Commissioners for Foreign Missions to establish here an industrial department, something after the pattern of the well-known institution at Lovedale, Cape Colony, or our famous American school at Tuskegee, Ala. Early in 1904 preparations were begun for making bricks and tiles for the first workshop, and as the building was larger than any of the earlier ones, and must carry some heavy machinery, it was necessary to make a better brick than previously had been used. A small pug mill of English manufacture had been for some time the property of the mission, and among the industrial equipment was a hand brick repress made in Cleveland, Ohio.

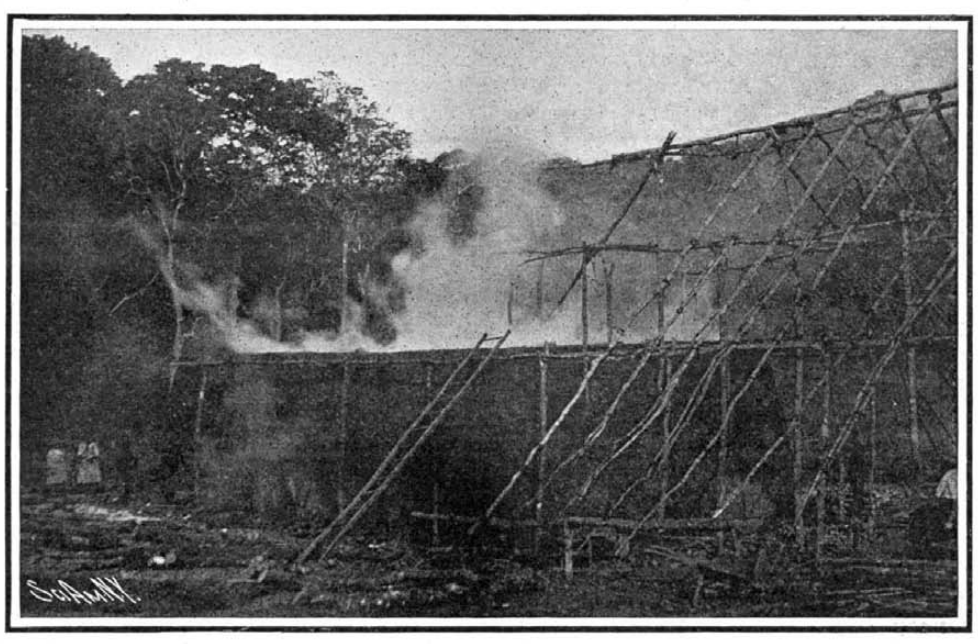

After They Were Dried the Bricks Were Placed in the Kiln.

We are fortunate in having fine clay for both brick and tiles, but the deposits are some distance from the mission station, which necessitates hauling either clay or the finished product about two miles. Both methods had been used, but we decided to make the brick at the pit, and so dug a ditch more than 3,000 feet long through the dense forest and jungle, to bring water from the near-by stream to the molding tables.

In April and May, before the close of the rains, we cleared the rank growth of grass, weeds, and vines from the field, and built an immense shed of poles thatched with grass, to protect the bricks after they were dry enough to put into the kiln. Test holes were sunk, the little pug mill set up, and everything made ready for beginning work at the end of the rains. Early in June active operations were begun. Two pits were opened, using the clay from them alternately, as in this way it could be dug up during the day and the pit filled with water from the ditch; then, by the following day, the clay was well soaked for pugging.

The pug mill stood between the pits, and the clay was carried to it in ordinary hods, the first ever seen in this part of Africa. Under usual conditions a horse or mule would operate the mill, but here neither was available, as this climate generally proves fatal to either within a few months. Donkeys were to be had, but we found them too slow, so used two to four "boys" instead, changing them frequently and experiencing little trouble. Of course, they grumbled at our making *izimbongolo* (donkeys) of them, but really they had about the easiest work on the field.

The difference between American and English machines is well illustrated by this pug mill, which simply pugs the clay and discharges it unmolded, while the corresponding American machine would force it out in form to be cut into bricks by a wire or knife.

After coming from the pug mill the clay was tramped by the bare feet of a boy or two, and then taken to the molding tables. The usual way is to temper the clay by turning a lot of cattle into the

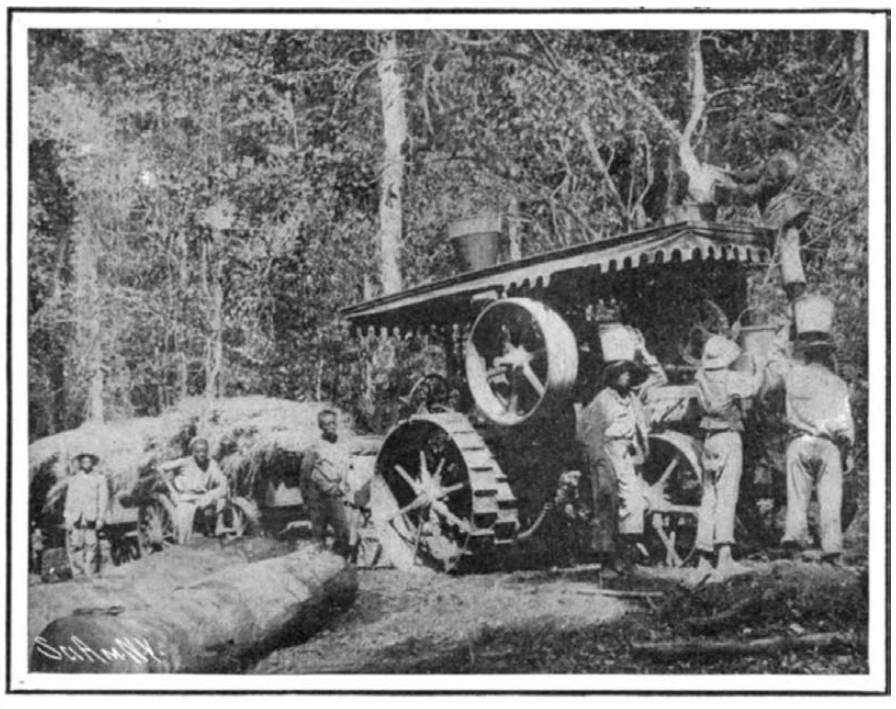

The Traction Engine in the Jungle.

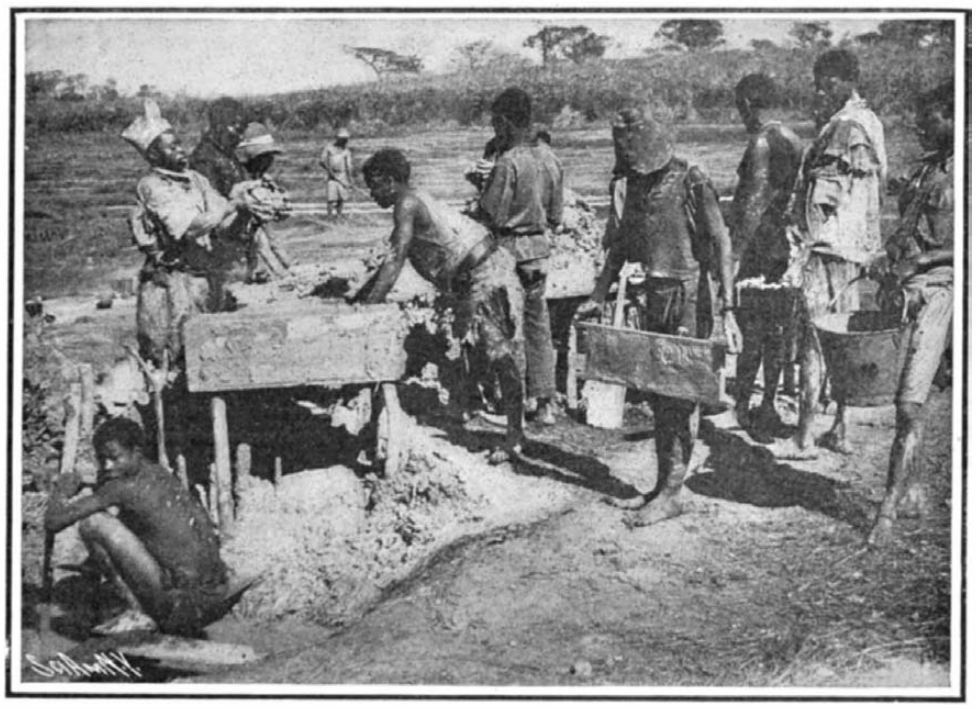

Scene at the Molding Tables.

BRICK AND TILE MAKING IN THE TROPICS.

pit, and driving them around until it is well mixed. At the tables the molders press the clay by hand into the wooden forms, two or three bricks to the form, using water liberally. Boys carry the forms to the field, which is dug up into long parallel rows, smoothed off very carefully on top, and just wide enough for the bricks in one form. It is quite a trick to shake the soft clay free from the form without spoiling the bricks. In fact, they are usually rough and irregular. Here is the great difficulty in the South African "slop" brick, and just here our

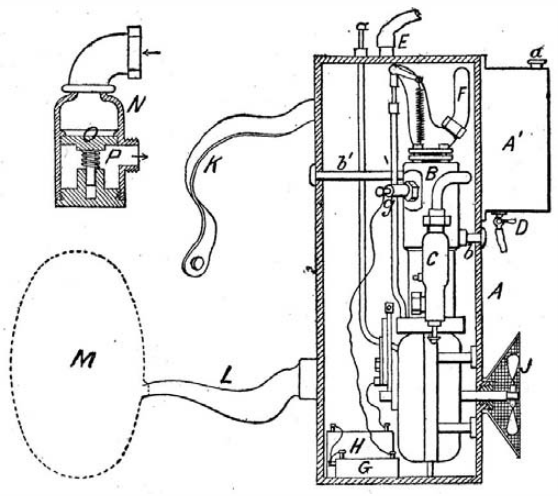

Details of the Motor.

little repress made a vast improvement possible. In the usual practice the wet bricks are covered with grass and allowed to dry slowly, until beyond danger of cracking in the sun. Then they are dried as fast as possible, and when a few thousand are ready they are put into a kiln and burned.

We allowed them to dry under cover for five or six days, then we repressed them and stacked them loosely in piles to finish drying. Two molders averaged nearly 4,000 brick daily, and by putting four of the best men on the repress, we were able to take care of them. One man with wheelbarrows wheeled the bricks from the field to the machine, and two carried them away to dry, making seven men engaged in repressing. The record run for both molding and repressing was approximately 5,000 in a day of little more than nine hours.

This is commonly supposed to be a land of cheap labor, and the cost of manufacturing may be of interest. The molders were paid $10 per month, the best men on the repress $6.25, ordinary laborers $4.25, and boys $1 to $3 per month without food. About thirty men were employed, and the bricks cost approximately $4 per 1,000 when burned, not taking into consideration the loss in burning.

Repressing costs nearly 30 cents per 1,000, and easily doubles the value. Our brick are the wonder of all the district, and others say they will try to duplicate them.

The manufacture of tiles is very similar, but far more difficult and not so satisfactory. The clay was put through the mill three times, well tramped by boys, then worked thoroughly by hand, and molded into thin cakes 1 inch x 1½ inches x 12 inches. These must be kept very carefully covered, and repressed at just the right stage, in order to make perfect tiles. It required two extra heavy men on the lever of the repress to secure sufficient pressure, and 800 per day was about the limit. After repressing, the tiles are again covered with grass till they are quite dry. The cost in the kiln was about $10 per 1,000, but later losses brought the final cost up to nearly $20 per 1,000, and even at that price they were only about half the cost of iron roofing delivered here.

About 90,000 bricks and 16,000 tiles went into the kiln which was much larger than any before attempted in this district, and for this reason was not sufficiently burned. The consequent loss of bricks was small, but the loss of tiles was about 45 per cent, notwithstanding 6,000 were successfully reburned in the face of the assertion by old brickmakers that it could not be done.

The breakdowns and repairs were what might be expected in any country 150 miles from a repair shop, and need not be recounted here. It is hoped that tiles may be made much more successfully this season, as we have made some improvements in the dies. Possibly other readers of the Scientific American working under similar conditions may find in these experiences some suggestions of value.

The world's production of Portland cement has increased from 2,500,000 tons to some 11,000,000 tons in the last twenty years, and the center of the industry has shifted from Europe to the United States.

THE SCREW-PROPELLED SWIMMER.

BY THE PARIS CORRESPONDENT OF THE SCIENTIFIC AMERICAN.

M. Constantini, of Paris, after having been successful in adapting a gasoline motor to a roller skate, which we illustrated not long ago, now brings out another use of the motor in the form of a life-saving apparatus or automatic swimming device which can be used for sport as well. Bathers, for instance, can take exercise with the apparatus along the coast. Such an apparatus must be as light as possible, and precautions must be taken so that the motor will work under water in all conditions. A good distance can be covered, even by a novice, which distance is only limited by the size of the fuel tank.

We show three pictures of the life-saving apparatus as it is now constructed. In the first view it is in complete shape, with the exception of the air-bags, which serve as floats. The second view shows the inside of the case with the front cover removed, in which we observe the arrangement of the motor, carbureter, and ignition device. The main body or case of the apparatus consists of a light aluminium box about 20 inches high which is adapted to be carried upon the back of the swimmer. It is just large enough to contain the motor and the rest of the apparatus. The propeller, *J*, which is used to drive the device through the water, is mounted on the end of a crankshaft, and the latter is made to project out through a water-tight packing in the side of the case. To protect the propeller from any shocks it might receive, it is surrounded by a conical piece, carrying a wire gauze covering. The crank for starting the motor is fitted in the usual way upon the projecting end of the motor-shaft. At the top of the case is a pipe, *E*, over which is fitted a rubber pipe going to a float bag (which is not seen here), and this bag serves at the same time to supply the air which is required for working the carbureter during the time when the box may be sunk below the surface of the water. This is only for emergencies, however, and in general the carbureter takes the air through a suitable pipe from the outside. A set of valves controls the air supply in these cases. For cooling the motor cylinder, which is jacketed at the upper part, the water comes from the outside and leaves the box again through suitable openings on either side of the case. Gasoline is supplied from an aluminium tank, A^1, of square section, which is fitted against the back of the case. Below the gasoline tank is placed the outlet valve, *D*, and the rubber hose on this valve is connected in turn to a pipe upon the box, which leads by a metal pipe to the carbureter. To control the working of the motor, two rods pass

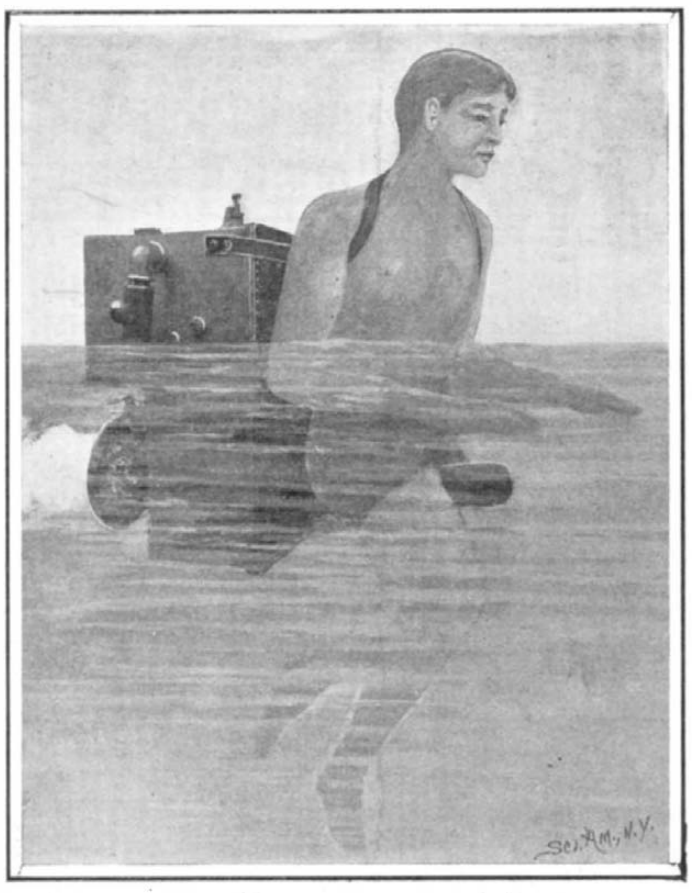

A WATERPROOF CASING CONTAINING A GASOLINE MOTOR WHICH DRIVES A SCREW IS STRAPPED TO THE SWIMMER'S BACK AND PROPELS HIM THROUGH THE WATER.

to the outside. One of these works upon the carbureter to regulate the proportion of gas and air for the mixture; the second rod acts upon the ignition shifting. The exhaust of the motor passes to the outside by the pipe, *b*. To it is connected a special form of muffling-box, which is shown in the section. It is provided with a valve, *O*, which is kept pressed up by the spring when the exhaust ceases. This has been designed so as to prevent the water from entering the exhaust pipe when it is submerged below the surface. Attached to each side of the main case is an air-bag of some size which serves as a float. The swimmer is seated upon a projecting saddle formed of a metal plate covered with cork, *L*. The saddle is hinged to the box in order to fold it up when not in use, and at the outer end is attached an air-float which can be of any convenient size. Two straps are fixed to the upper end of the box so as to fasten it upon the swimmer's back. At the lower end the straps are fastened in place by a hook or a button projecting from the box. The storage battery and induction coil, which are not seen here, are stowed in the lower part of the case under the motor. In order to use the life-saving device, the swimmer first starts up the motor by means of the hand crank from the outside, and, after seating himself on the saddle, puts the box upon his back, ling it by means of the straps. After the air-bags have been filled up, he goes into the water. He regulates the speed of the motor by the two rods we mentioned above, which act upon the carbureter and on the ignition. Steering is done by opening the hands more or less, or inclining them at different angles. Upon reaching the shore, he stops the motor by cutting off the gas supply and the ignition.

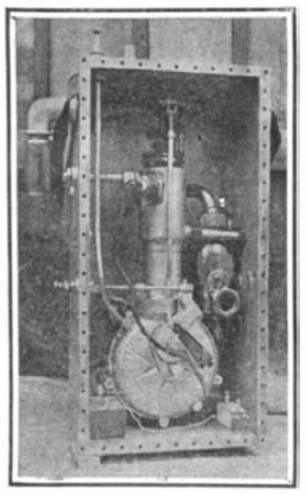

The Cover of the Motor Removed.

The Chimera of the Commercial Synthesis of Foods.

BY PROF. TH. BOKORNY.

For some little time certain of the carbohydrates have been included in the list of substances that can be made artificially, in the laboratory. I do not allude to the commercial manufacture of glucose, on an immense scale, from starch, nor even to the possible production of glucose from still another carbohydrate, the cellulose of wood. I refer to certain preparations which are yet little known outside of a small body of specialists; for example: Butlerow's "methylenitan," Loew's "methose," "formose," and "isoformose," and Emil Fischer's "*a*-acrose," which have been built up by synthesis from much simpler organic compounds. Just as plants, aided by sunlight, construct carbohydrates from atmospheric carbonic acid, or from formaldehyde, methyl alcohol, etc., so chemists have produced sugars or carbohydrates by agitating formaldehyde with excess of hydrate of lime, or by heating it with magnesia.

But the commercial production of these synthetic sugars will long be economically impossible, owing to the competition of the plants and the sun, which work far more cheaply than man. Cane sugar is worth five or six cents a pound at retail. What hope is there for producing it synthetically at such a price? Potato starch costs less than two cents a pound. The synthetic production of carbohydrates at these prices will scarcely be possible until we have found a way of utilizing solar energy as economically as it is utilized by chlorophyl—and we are yet very far from such a consummation.

Only a very bold and rash spirit can dream that the manufacturing chemist will, within any conceivable period of time, supplant the former as a purveyor of food.

A sober review of the actual facts leads to a very different conclusion. Consider, for example, the cost of converting the albumen of meat into somatose—that is to say, into the substances known to the chemist as albumoses or propeptones. Although somatose is only a slightly *simplified* albumen, it costs ten times as much as the very albumen from which it is derived, and a hundred times as much as vegetable albumen. There have recently appeared, even in popular journals, reports of the synthetic production of albuminoids in the laboratory of the eminent chemist Emil Fischer, of Berlin. From the considerations given above, however, it would appear that this synthesis is likely to have as little immediate practical value as is possessed by the earlier synthesis of carbohydrates.

In regard to foods, the task of chemistry will continue to be the study of their chemical constitution and structure, the knowledge of which is of inestimable value in medicine and biology.

The synthetical production of foods is not at present a problem worthy of the attention of serious-minded chemists.—Translated for the Scientific American from Umschau.

THE KROMAROGRAPH—AN AUTOMATIC MUSIC-RECORDING APPARATUS.

BY DR. ALFRED GRADENWITZ.

While the phonograph affords a means of recording the spoken word or a sound, and the modern methods of mechanical writing, both stenographically and by means of the typewriter, enable language to be fixed graphically at the same speed it is spoken, a device for registering the notes produced by a musical instrument has so far been wanting. Such an apparatus would be of universal value to the composer, because

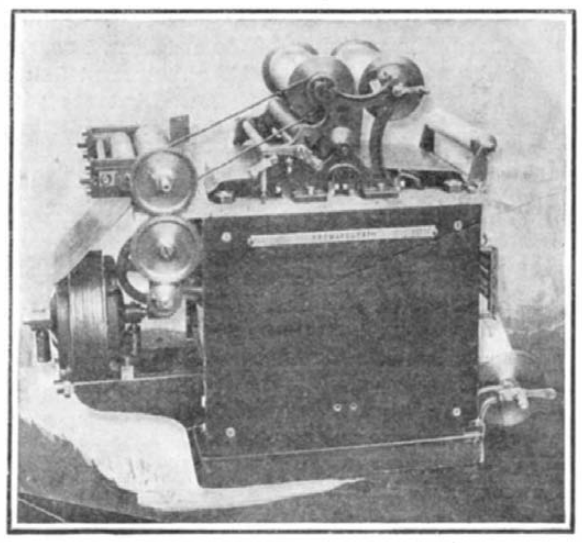

The Kromarograph.

in transcribing his composition to paper much time is lost and the creative power thereby impaired.

None of the numerous attempts made of late years to construct an apparatus of this kind has been successful, owing to the complication of mechanism and to the illegibility of the records. A machine invented by Mr. Laurenz Kromar, of Vienna, Austria, which has been exhibited at the International Musical Exhibition recently held in Berlin, seems to solve the problem satisfactorily. Readily connected with any type of keyed instrument, it automatically records the notes played in characters which closely resemble ordinary notes, and which are most easily read or transcribed. The apparatus works without any disturbing noise, is about the size of a typewriter, and is operated by electricity.

As seen in one of our illustrations, the most striking part of the apparatus is a set of rollers operated by a small electric motor, which rollers uniformly carry a paper tape over the types. As the keys are pressed down the types are actuated by an ingenious system of eighty-seven electro-magnets (each controlled by one key). The type corresponding with the key is attracted with extraordinary precision, registering its corresponding note on the tape of paper as it runs past.

The motor is driven either by direct or alternating current at 110 volts, its operation being controlled from the musical instrument by the aid of special contacts. Owing to the arrangement of the types and special provision for the upper and lower keys, each note accurately falls on or between the lines.

The note system of the kromarograph, as the machine is called, closely resembles the usual system of note-writing, the treble and bass of the five-line system being retained. The reading of eighth, sixteenth, and thirty-second notes is facilitated. Each white key corresponds with a double dash and each black key with an intermediary single dash of greater thickness. C-sharp and D-flat, D-sharp and E-flat obviously coincide in the new system, corresponding as they do with the same key of the piano, while their harmonical signification in the composition will be apparent. As soon as a note has been recorded, the ruling roller automatically continues the ruling, so as to prevent any displacement of the notes.

The tempo is marked by a number of rhymthical dots corresponding with the tempo dashes of the ordinary note-writing system, these dots being produced in the course of playing, not automatically, but rather according to the player's discretion by means of a special pedal.

The length of notes and rhythm of the tune are recognized by the length of the dashes produced by the types, which length strictly corresponds with the duration of the pressure on the key, a short touch leaving a short dash, and a prolonged touch a longer dash. Because of the uniform motion of the tape, the length of dash accurately corresponds with the duration of notes, while gaps between two subsequent dashes represent the lengths of interval. If the same tempo is maintained, the rhythm will be readily ascertained even without the dots referred to above, while each *ritardando* results in a lengthening, and each *accellerando* in a shortening of the length of dash. Not only any details as to the touch and cadence, but any inaccuracies in the performance will be faithfully reproduced in the record. *Staccato* will be inferred from the shortness of dashes and the length of pauses, and *legato* from a succession of dashes without interval. A *glissando* will be characteristically reproduced by a dotted line, which is the more approximately vertical as the speed of playing is greater. *Arpeggios* and trills are likewise rendered in some characteristic way.

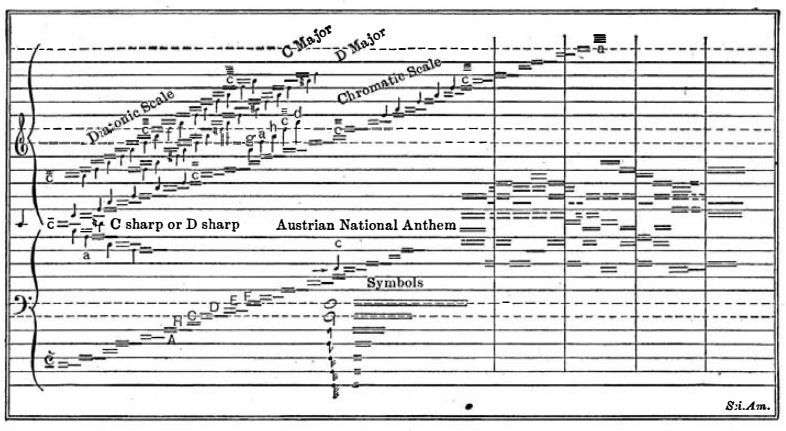

Record Made by the Kromarograph.

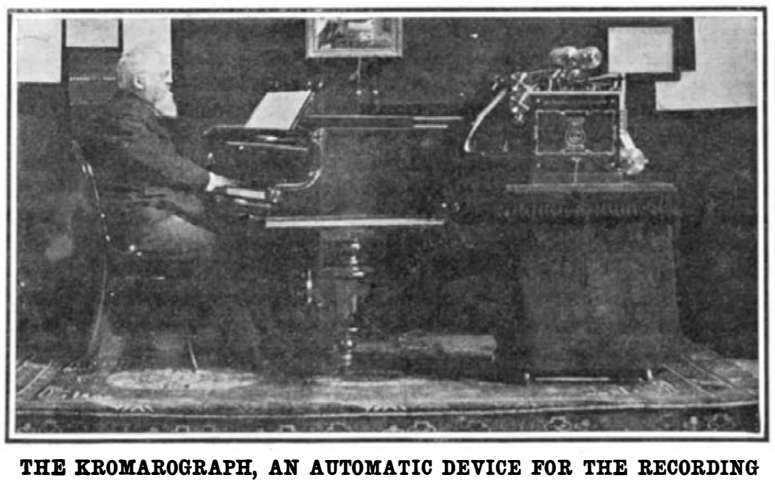

THE KROMAROGRAPH, AN AUTOMATIC DEVICE FOR THE RECORDING OF MUSICAL IMPROVISATIONS.

Transmission of Rabies by a Scratch.

It is a popular and most erroneous notion, that hydrophobia appears in consequence of biting, and more rarely in consequence of licking surface wounds. There is also a third and easy mode of contamination—by scratching. Dr. Remlinger, of the Institute of Bacteriology, Constantinople, has just published several observations that indubitably establish the existence of such an origin of the hydrophobic infection. And this origin is easily explained. A certain number of animals (the dog and the cat in particular) have, in the normal state, a habit of licking their paws. Now, it has been proved that the saliva of rabid animals is virulent several days before the appearance of the first symptoms of hydrophobia. When the disease is declared, a new factor intervenes. The rabid animal scatters on the ground slaver that, especially if it be chained up or confined in a close place, soils its paws and its claws. On the other hand, the scratch lays bare numerous nervous fibers upon which the poison is very easily sown. Conclusion: Every person scratched by an animal rabid or suspected of being so should be inoculated by the Pasteur method with as little delay as possible.

The Aluminium Production of the World.

A report has recently been prepared by Mr. Guenther, American Consul-General, on the output of the various aluminium-producing works. The figures as given in the Chamber of Commerce Journal are as follows: The Aluminium Industry A.G., with works at Neuhausen, Switzerland, Land-Gastein, Austria, and Rheinfelden, produce 3,675 tons per annum. The British Aluminium Company has works at Foyers, Scotland, and also at Sarpfos, in Norway, and its total estimated annual output is 2,250. The Société Electro-Metallurgique Française produces 2,325 tons per year at its works at La Praz and Les Sordrettes. The other French company, the Société des Produits Chimiques d'Alois et de la Carmargne has works at Calypse and St. Felix, whose combined output for one year is given as 2,100 tons; but we understand that the French works were recently closed for some months owing to a strike. The Pittsburg Reduction Company, of Niagara Falls, Shavenigan, Canada, and Massena, is stated to have a combined output of 4,200 tons.

AN IMPROVED PUFF BOX.

Pictured in the accompanying engraving is an improved form of puff box designed with a view to overcoming the objectionable features of the ordinary puff box. In articles of this character as heretofore made, the puffs normally rest in the powder, and are consequently liable to pick up an excessive amount. The new puff box, however, normally holds the puff out of contact with the powder, but in such a manner that the user may, at will, press the puff down sufficiently to take up only the desired amount of powder, thus preventing bringing too much powder to the face, and also avoiding waste or the mussing of dressing gowns, dressing tables, and the like, by spilling the surplus powder. The construction of the improved box will be clearly understood by reference to the illustrations. It consists essentially of a ring-shaped cage (Fig. 1) and a puff rest (Fig. 2). These are assembled in a casing or box, as best shown by the section view (Fig. 3). The puff rest consists of a rim supporting a netting. The rim is adapted to fit against the bottom of the cage. The cage is preferably corrugated and several of the corrugations are utilized for housing spiral springs. The springs are secured at the top to the cage, while their lower ends are hooked to lugs on the puff rest. Secured to the cage are several vertical rods which extend below the bottom of the cage, serving as legs to space it from the bottom of the puff box. The puff rest is formed with guide arms which fit against these legs. The bottom of the box is filled with powder and the puff normally lies in the netting of the puff rest. In use the puff is pressed down more or less into the powder according to the amount desired to be taken up. The illustration shows the puff in its normal position, while in dotted lines its depressed position is indicated. It will be understood, of course, that the springs return the puff rest to its normal position as soon as it is released. If desired, any surplus powder may be removed from the puff by rubbing it against the corrugations of the cage. A patent on this improved puff box has recently been secured by Mr. Eugene A. Bagby, Waverley Hotel, Louisville, Ky.

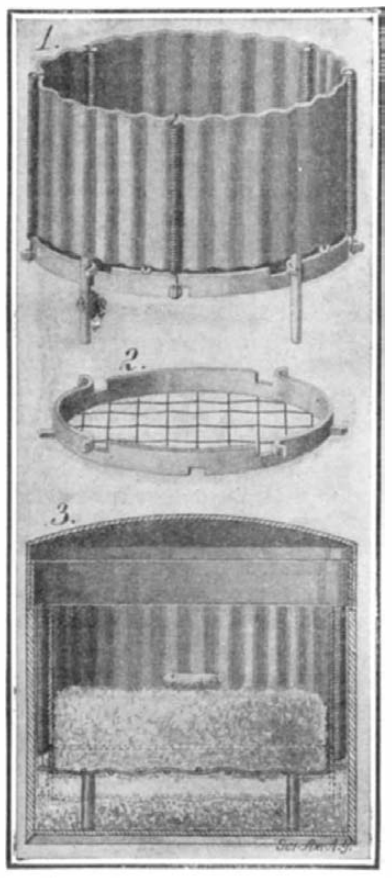

AN IMPROVED PUFF BOX.

In a paper read at the annual convention of the Canadian Electrical Association, H. W. Buck, chief engineer of the Canadian Niagara Power Company, has this to say about the insulators which are used at Niagara: The insulators are made of a compound known as electrose. This material is a very good insulator, is very strong mechanically, and is entirely free from cracks and other defects which are common in glass and porcelain. Similar insulators have been used on the Buffalo transmission lines of the Niagara Falls Power Company for the past three years, and they are the only insulators on those lines which have caused no trouble. It is impossible to shatter electrose insulators by stone throwing, and they will frequently turn a rifle bullet without being damaged seriously. The conductor used on this line is of aluminium of 500,000 C. M. in section and having thirty-seven strands.

The sections of the Shanghai-Nanking Railway to Su-chau and Wu-sieh, 91 miles, were officially opened on July 16, says the Times. It is hoped that the line will be completed to Nanking by the spring of 1908.

A NEW TYPE OF SIXTY-FOOT SUMMIT LEVEL CANAL FOR PANAMA.

BY W. F. CLEVELAND.

In the SCIENTIFIC AMERICAN of June 30 a brief outline of the proposition forming the subject of this article was published with an appended note by the Editor, referring to the rejected 60-foot level type adopted by the board of consulting engineers for comparison with the sea-level type, recommended to Congress for adoption in the majority report. It proposed a dam of moderate height at Gatun, and specified a second dam with locks at Bohio for the maintenance of its 60-foot summit level, and the control of the Chagres floods, by the usual dam and basin at Gamboa. The serious engineering difficulties discovered in the proposed foundations at Bohio were chiefly instrumental in compelling its abandonment, although the almost identical altitudes of Bohio and Gatun suggest a secondary reason.

In seeking to evade these difficulties and a portion of the cost of the three great dams incorporated in this proposition, a minority of the engineers advised a colossal structure at Gatun for the maintenance of an 85-foot water level submerging the whole central valley of the Chagres, combining the three Atlantic locks in duplicate flight, and extending the location of the second lock site to Pedro Miguel on the Pacific slope. A strenuous controversy between the opposing engineers was thus precipitated and during the succeeding Congress the criticisms of the alternative type were continued with a vehemence and volume unprecedented in the annals of that august body, and resulted, contrary to general expectation, in the absolute rejection of the sea-level type. But although the chimerical character of a sea-level canal for Panama was satisfactorily exposed, its opposing lock type was shown to be far from perfect, and indeed some of the criticisms seem almost equally fatal and certainly should influence the administration to carefully consider the arrangement of the dams and locks which is shown in the accompanying illustration.

Beginning near Colon, the first eight miles of the canal will be constructed at sea level, 500 feet in width, as proposed in the recommended type. At Gatun the first dam and single-step lock (in duplicate) will be erected for the maintenance of a 30-foot water level, which will extend to the foot of the northern slope at Culebra. The second single-step lock (in duplicate) and dam across the artificial channel at Obispo will then change the water level to that of 60 feet, which is continued through the cut to Pedro Miguel on the Pacific side, where the third dam and lock site is located. In order to supply the summit level with water a side channel, connected with Gamboa basin as shown in the illustration, is constructed and provided with regulating sluices for the control of the variable levels and floods of the Chagres, which will be received in the space reserved above the minimum 60-foot level of the basin. As the low-water level of the river at Gamboa is nearly at the elevation of 60 feet, almost the entire space inclosed in the basin will be available for water storage. A spillway directly connected below Obispo with the 30-foot level also forms a part of the equipment at this point. If advisable a tunnel could be used instead of a side channel.

At Pedro Miguel the 30-foot level is again reached through a single step lock, also in duplicate, and here, as at Obispo, the cost of the equipment will be reduced to a minimum, as the artificial channel will only be encountered, probably with bed rock foundations at its bottom. Spillways will be necessary at both of these points for the discharge of requisite volumes of water from the summit level. Lake or broad channel navigation will then be resumed and continued to La Boca dam, where a single-step lock (in duplicate) at Sosa will connect with the tidewater of the Pacific, regulated for shipping by the proposed tidal lock at the head of the four and one-half miles of sea-level channel.

The work of dredging the channel across the terminal lakes could be done during the erection of the dams, beginning with the submerged sections in or near the river estuaries and avoiding deep-water dredging as far as possible by suitable regulation of the lake levels. Dry excavation will be necessary for two or three miles below Obispo until the flooding of the channel will permit of its completion by the use of dredges. The low-level sections of the canal will thus be inclosed by parallel embankments of dredged material, partially submerged for the greater portion of the way, marking the course of the channel, and protecting it from currents and floating or partially submerged obstructions. A submarine forest or jungle, such as will cover the beds of the lakes for many years after the completion of the canal, would soon cover the surface of an unprotected channel with water-soaked trees and rubbish, dangerous to shipping, and especially so to the propellers of steamships. It would be difficult to protect a high-level channel from such obstructions.

Practically all the free sailing advantages of the high-level canal will be retained. With suitably drawn contours, a channel from 200 to 300 yards in width will afford as safe and speedy navigation as any inland lake or river. A few miles above Bohio the channel will become more restricted than that proposed for the high-level canal, but the work of meeting all essential requirements throughout this section of the canal will not materially increase the outlay. Above the head of the lake, with the exception of the Chagres, there are no streams of any importance, and the proposed basin for the reception of its floods will serve, with equal efficiency, the purpose of the abandoned dam at Bohio. Nature seems to have had a definite object in view when she contrived the impossible foundations at this point. There was no need for a dam at Bohio. The erection of the Gamboa dam on primary rock foundations at a depth of only 54 feet will be justified by the element of safety that long experience in the maintenance of similar structures has engendered, and that it will effect the solution of the problem imposed by the erratic habits of the river it will convert into a lake, there is no dispute among engineers. It seems strange, however, that the sea-level advocates should have given so much attention to this problem and such indifferent consideration to a score of other rivers uniting at the bottom of the valley traversed by the proposed canal and swept by the same tropical floods for an equal portion of the year.

At the close of the rainy seasons an enormous volume of water will be stored in the basin, supplying ample volumes for lockage throughout the annual droughts, and permitting the diversion of the surplus, through the regulating sluices and side channels, into the summit level, where the overflow will be divided, with the view to as large a discharge as possible at Pedro Miguel, as the lower level spillway at Obispo will increase the output at this point. The proposed dam at Alhajuela, intended for the storage of lockage water, forming part of the plans for a high-level canal, will not be necessary to the success of this project.

At Culebra cut the volume of excavated material in the 25-foot stratum below the bed of the high-level channel will impose an additional outlay, but the work will be confined within the limits of the navigable channel as the wide summit excavation of sliding material is demanded, regardless of the choice of plans. It will yield a direct return in the avoidance of two locks (in duplicate) with the cost of their operation and maintenance, and a much more important advantage in the adjustment of the conditions to the avoidance of locks in flight.

Locks in flight are the one serious innovation in the high-level plans. The outlay for land damages incurred in the submersion of large areas of fertile lands will be much greater, and the controversy concerning the permanency of the Gatun dam, impounding an additional depth of 55 feet of water, has reached a hopeless stage of opposing of irreconcilable convictions, but the former may not be a serious matter from the viewpoint of an opulent country, and it may be proper to say that the latter danger is at least potential in its character. If it is a danger, however, it threatens not only the gigantic structure at Gatun, with its double flight of triple locks, but the very existence of the canal itself. If the dreaded disaster ever comes there will be no canal at Panama, and America will be bowed in shame at folly that squandered the millions her discretion had saved from the pursuit of the chimera that humbled the national pride of a sister republic. Earth dams impounding a moderate depth of water are not an experiment even on foundations similar to those at Gatun, and America cannot afford to try one at Panama.

But the incorporation of a system of locks in flight at La Boca as well as at Gatun is a feature of the high-level plan that even its own advocates make little effort to defend. The first objection is the costly work of securing suitable foundations for them at these points, and especially at Gatun, where it seems that Nature has provided a subterranean peak of barely sufficient area. She seems to say to the engineers: Build one lock here and no more. But even if we are heedless of the suggestions of our great teacher, the use of such equipment is endangered by the fact that it has never been tried in the special service for which it is proposed. Locks in flight are an appropriate and useful feature of barge canals, and in similar service have yielded their designed efficiency for many years, but that the experience gained from such usage will be found almost wholly inapplicable to the work of handling ponderous battleships and ocean liners in such positions is evident. Those who have watched the process of docking one of these great ships will appreciate the difference in the character of the work imposed by their enormous bulk and momentum. The danger of crippling the canal by the destruction of one of the summit lock gates has been pointed out. All the succeeding gates might be swept away, permitting a torrent of water to sweep through the locks, impossible of control, and doubtless inflicting irreparable damage. That such an accident should occur in the Manchester canal without serious results may be attributed to its single-step or tidal-lock design.

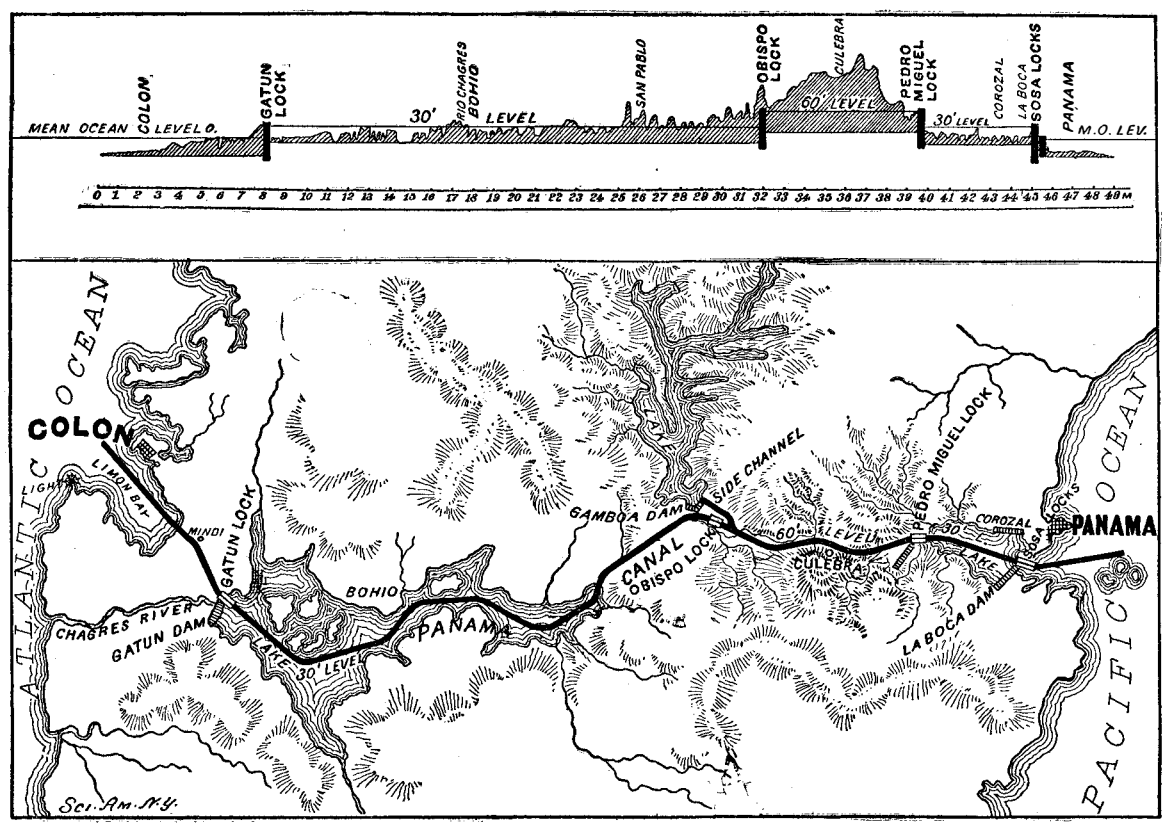

PROFILE AND PLAN OF PANAMA CANAL PROPOSAL WITH FOUR LOCKS AND 60-FOOT SUMMIT LEVEL.

Panama has been the sepulcher of engineering reputations, but the disasters that have overtaken its distinguished pioneers should warn their successors against false or partial solutions of the great problems that Nature has imposed at this strange coupling of the western continents. The world is watching the progress of the work, and the expenditure of a few additional millions, if such is necessary, will be small matter, so that it aids in securing the safety and efficiency of the canal. The delusions of the sea-level dream have been happily dispelled, and the choice of a lock type evidently superior to its surviving competitor is offered at the close of a destructive controversy, but still in plenty of time for adoption.

Aluminium Paper in Germany.

Aluminium paper is now manufactured in Germany, and recommended as a substitute for tin foil. The paper used is a sort of artificial parchment obtained through the action of sulphuric acid upon ordinary paper. The sheets are spread out and covered upon one side with a thin coating of a solution of rosin in alcohol or ether. Evaporation is hastened by means of a current of air, and the paper is then warmed until the rosin has again become soft. Then powdered aluminium is sprinkled upon it, and the paper subjected to strong pressure to fasten the powder thereon.

RECENTLY PATENTED INVENTIONS.

Electrical Devices.

ELECTRIC CLOTH-CUTTER.—J. B. REPLOGLE, Chicago, Ill. This invention has for its more particular object the production of a power-driven cutter operated, preferably, by electricity. When the device is used for cutting comparatively thin layers of cloth only the lower baffle-plate is called into use. When a large number of layers are to be cut simultaneously, the machine is fed directly against the edge of the "stack," the several baffle-plates finding their way between the layers, each consecutive pair of plates preventing undue movement of such layers lying therebetween.

ELECTRIC TELPHER POSTAL SYSTEM.—R. T. PISCICELLI, Corso Umberto I. No. 23, Naples, Italy. The inventor's object is to provide devices, acting for the most part automatically, by means of which correspondence introduced in the posting-boxes in a postal district is rapidly collected and carried to the central office. This collection is effected by means of small vehicles driven by electric motors running over special aerial lines used exclusively for this purpose and made of insulated metallic wires or cables, which act as guides to the vehicles and conductors of the current.

TELEGRAPH - TRANSMITTER. — H. O. PUTT, Millbury, Ohio. As its principal object the improvement provides a device which can be mounted under the frame of an ordinary type-writing machine and operated thereby without in any way altering the machine, and which will accurately transmit the characters of the Morse or any other alphabet automatically and rapidly, and do away with many complications in transmitting characters by telegraph by the operation of a keyboard.

Of Interest to Farmers.

GATE-FASTENER.—J. HOLLOPETER, inventor, and P. R. GILES, assignee, Elsmere, Neb. The fastener is especially adapted for use on gates such as are formed in wire fences and which are not as frequently opened as ordinary gates. It refers to such gates as are formed without frames and which are maintained in position by a horizontal tension in the longitudinal members of the gate. It prevents the actuation of the fastener by cattle.

PLOW ATTACHMENT.—J. SPODEN, Clyde, Wash. This attachment is devised for pressing down or flattening wheat-straw stubble or grass on the furrow-slice as turned by the plow. To this end a ribbed roller is provided which is held rotatably on a swinging arm journaled on the plow-beam, the roller being adapted to work at such angle and in such proximity to the moldboard that it acts on the furrow-slice at its turning-point, so as to break, press down, or flatten the straw, stubble, or grass in such manner that it is buried in the furrow beneath the slice.

Of General Interest.

CORNER - FASTENING. — L. B. PRAHAR, New York, N. Y. The purpose of the invention is to provide means for connecting the members at the corners of a frame and in producing such result forming an opening at the junction of the corner members for the passage of a pin, rivet, or other required article.

COLLAPSIBLE MOLD.—C. W. OVERTURF, Dumont, Iowa. The broad idea characterizing the improvement is a peculiar mold adapted for use in the construction of plastic passageways, the same being constructed collapsible, whereby to facilitate its removal when the plastic is sufficiently set. It relates to molds for forming concrete or other plastic composition pipes, culverts, etc.

WELL-RIG.—S. S. STROTMAN, Haynie, Pa. This rig comprises means for bracing a structure in the direction from whence proceeds the driving force for the movable operative parts of the structure, means being also employed for controlling the reel upon and from which is caused to be wound and unwound the line or cable for the bail or other well-tool. The parts of the structure are easy of access, adjustable, and smooth running in operation.

CHARGING APPARATUS.—T. F. WITHERBEE and J. G. WITHERBEE, Port Henry, N. Y. The invention refers to a charging device for blast-furnaces and the like. The requirements of a charging apparatus at present are that it shall be capable of varying the manner of distributing the charge at will and that it shall be adapted to mechanical filling. The principal object is to attain these results. It is an improvement on the former patent issued to Mr. T. F. Witherbee, in 1894.

DAM.—G. E. LADSHAW, Spartanburg, S. C. This improved dam is a unitary structure comprising piers provided with buttresses and connected by arches springing from the piers upon the opposite sides from the buttresses. While the dam may be composed of a plurality of arches supported at their abutting ends by buttressed piers, it may be composed of a single arch with ends directly supported by abutments.

PAD FOR HORSE-COLLARS.—D. S. BROWN, Watertown, N. Y. Pads for use in collars and various similar places have been usually constructed by forming a sort of bag or by securing two sheets of fabric or similar material together at the edges and forcing curled hair or other cushion material into the same through an opening in the end or side. This results in making wads at certain places, and therefore produces irregularities in the softness of the pads. This invention overcomes these irregularities.

METHOD FOR TREATING ASBESTOS.—A. H. HIPPLE, Omaha, Neb. This is a process for treating asbestos so as to vulcanize the same. It is an improvement on a former patent granted to Mr. Hipple. In this case he takes asbestos fiber, powdered sulphur, and water and works the same into a pulp of the consistency used for making asbestos paper or millboard. The pulp being formed, pressure squeezes out a part of the water, and the mass is next dried. Oil is added and absorbed readily.

POLISHING-MITTEN.—R. E. HILLS and V. E. BREVOORT, Delaware, Ohio. The invention is an improvement in mittens intended and adapted for use in polishing shoes and other articles, the same being provided with two thumbs arranged contiguously so that a mitten may be worn on either hand and either palm serve as the polishing surface.

DIE-STOCK.—H. J. CARMODY, New York, N. Y. This invention relates to die-stocks—such, for instance, as are used in cutting threads upon rods, tubes, pipes, etc. Practical and convenient operating means are provided for threading a pipe located in some comparatively inaccessible position; also for cutting a thread upon a cylindrical bar which is more readily accessible; and also means if at any stage of cutting the device is desired to be operated backward.

TELEPHONE - DIRECTORY.—D. F. WHITCOMB, Cleveland, Ohio. Being in place upon the mouthpiece the directory in use is rotated thereon until the desired letter is at the right side. By means of an ear the plate may be partially withdrawn from the frame, thus bringing the subscribers' names under that index letter to view. Since the inner edge of each of the plates conforms to the arc of a definite circle, an outward pull on the ear belonging to that plate will have but slight tendency to move adjacent plates, since there will be more or less friction between the inner edges thereof and the sleeve.

Hardware.

NUT-LOCK.—L. W. LAYE, J. H. PHILLIPS, and J. BEVAN, Havre De Grace, Md. The patentees provide for the locking of the nut by slotting the end of the bolt and also forming a slot in the nut crossing the bore thereof. They pivot a hook latch on the nut at one side which may be swung into the slots of the nut and bolt and engage the side of the nut opposite the pivot.

KEY.—J. H. P. IBBOTT and W. R. YEARWOOD, New Amsterdam, Berbice, British Guiana. The invention relates to keys for locks, and has for its principal objects the provision of such a device which is normally incapable of performing its functions, but which may be readily manipulated or set by one familiar with its operation, so that it may be used in the customary manner.

Household Utilities.

COMBINED CHAIR AND STEP-LADDER.—A. M. WHITELEY and W. H. WHITELEY, New York, N. Y. The chair has a back suspended from which is an outwardly-swinging frame forming a brace for the back in outward position of the frame, the back and the rear supporting-legs constituting the ladder member capable of being tilted or carried. Back and rear legs are rigid with each other, but pivotally applied to the frame of the chair bottom, so that when the swinging frame is carried forwardly of the bottom the ladder member tilts for coöperation of the two. Means secure the swinging frame and ladder member to the bottom of the chair in each position thereof, and when the frame is carried to a vertical position the ladder member moves to corresponding position, the two becoming automatically locked.

COOKING APPARATUS.—W. E. BAXTER, Frankfort, Ky. In the present patent, the invention is an improvement in portable cooking apparatus, especially such as is intended for use in camping out, campaigning, and the like and which can be conveniently and compactly packed in shape for storage and carrying.

Machines and Mechanical Devices.

CHUCK.—L. A. WELLINGTON, Keene, N. H. The chuck comprises a body, jaws having recesses and which are mounted to slide with relation to the body, levers fulcrumed upon the latter and engaging the recesses, a ring movable upon the chuck-body provided with openings, and removable portions fixed in the openings and furnishing inclined faces for contact with the levers.

PITMAN.—A. M. AKIN, Spokane, Wash. The invention relates to pitmen, and especially to those designed for use in connection with agriculture-machines, such as headers and reapers, but may be employed wherever a connecting element of this character is desired. Its principal objects are to provide a device which may be readily adjusted to compensate for wear and effectively lubricated.

FIBER - CLEANING MACHINE. — F. S. MACY, Boston, Mass. This is an improved machine for treating fibrous plants—such as Manila hemp, ramie, maguey, sisal, and piña—for separating the fibers from the pulpy and gummy portions; and a special object the inventor has in view is the production of a machine distinguished for economy of construction and efficiency in work and operation.

MEANS FOR HARVESTING ICE IN THE FIELD.—F. E. LOSEE, Newton, N. J. An endless traveling cable is employed, together with suitable guides therefor, carried by supports erected at desired places of the field, means being used in connection with the cable by which the blocks of ice may be conveyed from the field directly to the shore. It is practically a conveying apparatus for the blocks of ice, and requires but few operatives in the field.

ANIMAL-RELEASING DEVICE.—W. A. IRWIN, Taunton, Mass. One purpose in this case is to simultaneously release all the animals in a line of stalls and at the same time turn on an individual spray on each to force them to leave the stalls and inclosure, the delivery mechanism for the spray being so arranged that in action the spray will reach the head and shoulders of each one, whether standing or lying down. The device serves to hold the hitching-straps in position for use, but when the water is turned on the straps will be simultaneously released.

PEANUT - STEMMING MACHINE. — P. D. GWALTNEY, Smithfield, Va. The roots or stems adhering to peanuts as dug from the ground require to be removed preliminary to storage, transportation, or preparation for the market, and this is ordinarily done by hand, which is slow, laborious and expensive. This simple machine performs such work effectively, quickly, and cheaply, without injury to the peanuts.

Prime Movers and Their Accessories.

TORSION-INDICATOR.—H. FÖTTINGER, No. 4 Prutz street, Stettin, Prussia, Germany. This improvement refers to an apparatus adapted to determine the rotary movements of power-driven shafts from their torsion in running and transmitting energy, the apparatus being based on the fact that in all qualities of malleable iron or steel the angle or arc of torsion is proportional to the actual rotary moment.

Pertaining to Vehicles.

TIRE-COVER.—W. A. ALLEN, New York, N. Y. One purpose of this inventor is to provide an effective cover for the tires of automobiles and other vehicles using rubber tires, which cover will fit snugly to the tire and conform to all parts thereof, the cover being so constructed that rain, snow, or hail will not beat in, but will be shed therefrom as soon as received.

NOTE.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

Business and Personal Wants.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. **In every case it is necessary to give the number of the inquiry.**

MUNN & CO.

Marine Iron Works. Chicago. Catalogue free.

Inquiry No. 8313.—Wanted, second-hand wire-working machinery.

For mining engines. J. S. Mundy, Newark, N. J.

Inquiry No. 8314.—For makers of ornamental iron sign brackets or holders.

"U. S." Metal Polish. Indianapolis. Samples free.

Inquiry No. 8315.—Wanted, armature core punchings of different sizes.

See our Ad. on back page. Star Expansion Bolt Co.

Inquiry No. 8316.—For makers of hot-air and steam furnaces, combined.

Handle & Spoke Mchy. Ober Mfg. Co., 10 Bell St., Chagrin Falls, O.

Inquiry No. 8317.—For manufacturers of glass tubes about 12 inches long, ½ inch outside diameter and 5-16 inch inside diameter.

Sawmill machinery and outfits manufactured by the Lane Mfg. Co., Box 13, Montpelier, Vt.

Inquiry No. 8318.—For manufacturers of Swan Boats, such as used in parks.

I sell patents. To buy, or having one to sell, write Chas. A. Scott, 719 Mutual Life Building, Buffalo, N. Y.

Inquiry No. 8319.—For manufacturers of or dealers in leather pulp.

Metal Novelty Works Co., manufacturers of all kinds of light Metal Goods, Dies and Metal Stampings our Specialty. 43-47 S. Canal Street, Chicago.

Inquiry No. 8320.—For makers of telescope pipes for use on blowers for ensilage cutters.

The celebrated "Hornsby-Akroyd" safety oil engine. Koerting gas engine and producer. Ice machines. Built by De La Vergne Mch. Co., Ft. E. 138th St., N. Y. C.

Inquiry No. 8321.—Wanted, makers of "Instantaneous" ice cream freezers.

Manufacturers of patent articles, dies, metal stamping, screw machine work, hardware specialties, machinery tools, and wood fiber products. Quadriga Manufacturing Company, 18 South Canal St., Chicago.

Inquiry No. 8322.—Wanted, electric massage or vibration machines.

Inquiry No. 8323.—Wanted, parties to make an attachment, in quantities, in the line of hasps and strap hinges.

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(10098) W. B. H. writes: I was given a question in a recent examination that the examiner stated was proved in a copy of your magazine; but he could not state the date the example appeared nor prove it himself. The problem read: "Do the amperes or volts increase when the electricity passes through an ordinary spark coil for gas lighting?" I said volts, yet my examiner says the answer is amperes, which I doubt. A. The volts are raised in the action of the ordinary spark coil in gas lighting. This coil has but one winding, no secondary. It is not an induction coil in the usual sense. The spark is produced by the self-induction of the current in the turns of the primary upon itself. This produces a higher E. M. F., which causes a considerable spark. There can be no more amperes in the circuit than the generator can produce.

(10099) J. K. asks: Please inform me why two telegraphic instruments will not work when set up in series. One of the instruments is a 4-ohm, and the other I think is larger. The larger one can be heard from another room, while the small one can hardly be heard at all. A. The smaller of the two instruments does not get current enough to work the magnet. In order to work together, they should have nearly the same resistance.

(10100) E. B. asks: 1. Have you any SUPPLEMENTS containing articles relating to the care and maintenance of the sal ammoniac battery used in telephone work? A. Cooper's "Primary Batteries" gives considerable space to the sal ammoniac battery. Price $4.00 by mail. 2. Can you recommend a book suitable for one who has to look after the repair of a telephone line? A. Hopkins's "Telephone Lines and Their Properties," price $1.50 by mail.

(10101) J. S. T. writes: I have been fitted with glasses to correct astigmation. Without glasses the rays of an ordinary street lamp appear extended perpendicularly; with the glasses they appear longer the opposite way. If glasses were properly ground, should not the rays radiating from light appear of uniform length? A. If your astigmatism were perfectly corrected by the glasses, objects would be seen in their correct outlines.

(10102) W. A. P. asks: 1. Should an ampere-meter be placed in the positive or negative terminal of a direct-current 110-volt dynamo? A. The ammeter may be placed at any point whatever in an electric circuit, since the same current flows through every part of a circuit. This is just like the flow of water through a pipe. If you had a pipe 1,000 feet long from a reservoir to your house, the same water and just as much would flow through every foot of the pipe, and a meter might be put into the pipe at any point in its length and the quantity of water flowing through the meter to be measured. 2. How much more would it register in the former than in the latter? A. It would register the same in either side of the circuit. It makes no difference where the ammeter is placed.

(10103) B. A. T. asks: 1. How many pounds of wire are used to wind the armature of the electric motor described in the issues of the SCIENTIFIC AMERICAN for December 8 and 15, 1900? Also the field magnet? A. About a half-pound for the armature and the same for the field. 2. How many watts are necessary to run it at its utmost power? A. We do not know. Somewhere from 12 to 24. Four cells of 2-volt battery, put two on series, should run it. 3. Cannot other journal boxes than the brass balls mentioned be used, such as a block of iron smoothly bored? A. Yes, of course; any kind of bearings can be used.

(10104) A. E. S. says: May I ask you to kindly inform what chemical changes take place during the setting of Portland cement, plaster of Paris, and similar substances. A. Mortar, which is made of slaked lime and sand, when exposed to the air, slowly changes into carbonate of calcium, and the entire mass becomes extremely hard. The water contained in the mortar soon passes off. When limestones that contain magnesium carbonate and aluminium silicate in considerable quantities are heated for the preparation of lime, the product does not act with water as calcium oxide does, and this lime is not adapted to the preparation of ordinary mortar. On the other hand, it gradually becomes solid, in con-

tact with water, for reasons which are not known. Such substances are known as cements. Plaster of Paris is found in nature in the form of gypsum or anhydrite, and consists of calcium sulphate and water. A granular form of gypsum is called alabaster. Calcium sulphate is difficultly soluble in hot and cold water. When heated to 100 deg. Cent. or a little above, it loses all of its water and forms the powder known as plaster of Paris, which has the power of taking up water and forming a solid substance. The hardening is a chemical process, and is caused by the combination of the water with the salt to form a crystallized variety of calcium sulphate.

(10105) H. H. M. says: Would you kindly inform me if I could get an object to float that is heavier than the water it displaces? For instance, are these large ocean steamers heavier than the water they displace? A. If a rigid body or solid be immersed in a liquid, both being at rest, the resultant action upon it of the surrounding liquid is a vertical upward force called the "buoyant effort," equal in amount to the weight of the liquid displaced, and acting through the center of gravity of the volume of displacement. From this it will be readily seen that you cannot secure an object to float which is heavier than the water it displaces. In the case of the vessel, because of the particular form of the hull, the law of displacement remains the same. The weight of the water displaced by the hull equals the entire weight of the ship and its cargo.

(10106) J. D. W. asks: Can it be proved that a right angle can be trisected? A. The trisection of a right angle is a very simple proposition. The radius of a circle is equal to the chord of 60 deg. If the radius be laid off as a chord from one extremity of the arc of a quadrant, or the arc subtending a right angle, and a radius be drawn to the other extremity of the chord, the angle formed on one side will be 60 deg. and on the other side the angle will be 30 deg. or one-third of a right angle.

(10107) A. E. N. asks: Why do steam boilers explode when, through misfortune, a steamer sinks? A. The explosion of boilers in steamers that are wrecked is probably due to the sudden stopping of the engines and the abandonment of the fireroom by the firemen without the proper precaution to check the fires. It takes but a few minutes in such cases for the steamer to overbalance the outlet of steam from the safety valves, when the rise in pressure ruptures the boilers. When one explodes, others follow by damage from the exploded boiler.

(10108) G. J. R. asks: Can you give me the reason for the vibration in a motor or generator when the armature and shaft are balanced as nearly as possible? I would like to see what your opinion is in regard to it. A. The slightest excess of weight on one side will cause a perceptible vibration of an armature. As little as one-thousandth of the total weight will cause a very considerable vibration. If an armature is perfectly balanced, it will run so quietly that it is difficult to tell whether it is in motion or not. The process of balancing an armature is described in Crocker's "Electric Lighting," Vol. I., price $3 by mail.

(10109) C. H. W asks in reference to the answer to query regarding the attraction of a 5-pound and 15-pound mass upon each other. The mutual attraction between the masses is given by the formula $F = K \frac{m m'}{d^2}$; and to this quantity the larger mass contributes three times as much as the smaller. It is true that this attraction acts upon both masses equally, and will give to each the same quantity of motion. In the case of the earth, when a body falls toward it, the earth also falls with the same quantity of motion toward that body. But the greater portion of the motion comes from the mass of the earth, since that is enormously greater than the mass of any body falling toward it, and therefore the small body moves much farther from this attraction than the larger one does.

(10110) H. L. B. asks: 1. Would you please tell me what produces the curly effect in bird's eye maple? A. We do not know how the mechanical forces act in the growth of the wood to produce the burls in the bird's eye. A while ago the question would have been answered, "It is the nature of the tree to grow that way." 2. Why is it necessary to only put ten 16-candle-power 104-volt lamps on a circuit? A. The amount of current which is allowed to flow through one cutout in a building is regulated by the rules of the Board of Fire Underwriters and is determined by the risk of setting fire should a fuse blow.

(10111) G. H. E. writes: In an informal conversation the statement was made that of the energy stored in a given amount of coal an extremely large proportion is lost in the attempt to employ it productively, as in the steam engine, and that the utilization of the energy wasted by the present methods is an important scientific and economic problem. This statement was challenged, and in the resulting discussion the following questions arose. 1. How large a proportion of energy stored in a given amount of coal is lost by methods commonly in use? A. From 20 to 25 per cent, and sometimes more, of the heat value of the coal is now lost. 2. At what stages in the process of transformation, and how, do the chief losses occur? A. Mostly by the heat going up the chimney, and to a small degree by bad stoking and radiation of heat from defective insulation of boiler setting and pipes. 3. What percentage of the energy in a given amount of coal can be (not is) used in producing steam? A. The possibilities for utilizing the full energy of coal are very small. Little may be expected over the best practice of to-day. It is the converting of the steam into active power wherein the trouble lies. 4. How is the amount of energy in a given amount of coal ascertained? A. The absolute amount of energy in coal is found, first by an analysis of its combustible constituents, from which the heat units are computed; second, by actual combustion of a given weight and measuring its heat producing property by absorption of the heat in water or by melting ice in a calorimeter.

(10112) J. A. M. writes: Will you kindly inform me whether the following facts are new, or only so to the writer? The mechanical equivalent of heat as given by Dr. Joule's experiment of a weight falling through air, actuating thereby wings in water, is 778 foot-pounds according to William Kent. Now you will note that the relative weights of water and air are as 1 to 774. Is there not an equation here between work, water, heat and air? Might not the slight variation of 774 and 778 pounds be due to the slip of the water? William Ripper gives the equivalent as 772 pounds. A. The mechanical equivalent of heat, which is called Joule's equivalent, as determined by Dr. Joule, was 772 foot-pounds. That is, to lift 772 pounds to a height of 1 foot requires the same amount of work as to heat 1 pound of water 1 deg. Fahr. This work was done between 1840 and 1843. Considering the advancement of mechanical science at that time it was a marvelous piece of work. He employed the friction of water and measured the heat produced. Joule also determined the equivalent by means of the electric current. Others investigated the same constant by other methods, the compression of metals, the specific heat of air, the induced electric current in metals, and the velocity of sound, with results fairly in agreement with that of Joule. Joule's method was that of direct determination of the number of foot-pounds of work used in actually heating one pound of water one degree. Other methods were indirect. That these coincided fairly well with the direct method was all that could be expected. All methods are open to errors, and more or less close approximations are all that could be attained. In 1879 Prof. Rowland took up the problem with the finest appliances of modern science. He employed water friction, as did Dr. Joule. His results were immediately accepted. Probably the work will not be done over again for a generation. Some of his results involved as many as 12,000 distinct observations. He proved that the mechanical equivalent varies with the temperature. Between 41 deg. and 68 deg. there is a change of nearly eight-tenths of one per cent in the latitude of Baltimore. The mean of Prof. Rowland's results is 778 foot-pounds, which for all ordinary purposes is at present considered the true equivalent. Prof. Rowland's experiments showed that the specific heat of water diminishes from 32 deg. to 84 deg., and then increases till the boiling point is reached. Rowland was able to produce a change of 63 deg. in the water where Joule could produce a change of only 1 deg. He also used the sensitive air thermometer instead of the slow mercurial thermometer.

(10113) An old subscriber says: I have several old daguerreotypes which until recently were in a good state of preservation. Now I find that the surface of the plate has apparently oxidized and the portrait has disappeared from view. Can you give me instructions for restoring the pictures and preserving them? A. The removal of the deposit from the surface of the daguerreotypes is such a delicate operation that, if possible, it should be intrusted to one who has had experience in that process. If, however, you wish to try it yourself, you may proceed as follows: Carefully separate the cover glass from the silver-coated plate, being especially careful that the surface of the latter is not touched even by anything so light as a feather. Soak the daguerreotype first in water, and then in a solution of potassium cyanide, from five to ten grains to the ounce; rocking the dish till the deposit is removed. A 20-grain solution of sodium hyposulphite may be used instead of the cyanide, although it is not always so successful. When the deposit has been removed, the plate should be well washed under a gentle stream from the tap, or in several changes of water, finishing with distilled water. The method of drying is important. The plate, after slight draining, should be taken by a corner by a pair of pliers and held over the flame of a spirit lamp or gas jet, allowing just sufficient heat to evaporate the remaining film of water, the evaporating of which may be assisted by gently blowing across the surface. The restored daguerreotype and cover glass, the latter after thorough cleaning, should then be bound together as before, and the more completely this is done so as to exclude the atmosphere, the longer will the image retain its pristine beauty. Potassium cyanide is a deadly poison. It should be used with care.

(10114) C. S. asks: About how much current does a ¼-inch spark coil take to give full length of spark? A. A good authority gives about 10,000 volts as the pressure required for a spark of ¼ inch. The current, or amperes, is insignificant. 2. Is a relay necessary in wireless telegraphy? A. Yes. 3. Is it necessary to have oscillators on the coil in wireless telegraphy? A. Yes. 4. With good usage how long should an induction coil last? A. Forever. There is no deterioration by use in an induction coil. 5. Can you explain why a Geissler tube still glows when connected with only one wire of the secondary of the coil? A. Because of electrical induction. The waves go through space from one pole of a coil to the other. The Geissler tube held between the two poles of the secondary will glow when it is connected with neither wire. The same experiment can be performed with the bulb of an incandescent lamp. Hold it in the hand by the metal base between the terminals of the coil.

(10115) R. W. W. asks: 1. The object-glass of my telescope consists of two lenses, one being convex and the other concave-convex. When they are together they are the same as an ordinary convex lens. Why is a single one not used? A. The two glasses are used to prevent the objects seen from being bordered with a colored fringe. Remove the concave glass and you will see the difference. Then study in some textbook of physics about achromatic lenses. 2. Why is it that copper wire is used for electric lighting and power currents and iron or steel for telegraph and telephone wires? A. There is a very small flow of current in the telegraph and telephone wires, and a large flow over the lighting and power circuits. Copper is a much better conductor than iron, and though it costs much more in the first place, it is far cheaper in the end. 3. What is the difference between a continuous and an alternating electric current? A. A continuous current flows like a stream of water steadily in one direction. An alternating current flows by rising to its full voltage and then falling to its least. There are alternations of the electromotive force, which has all possible values in a series.

(10116) D. P. asks: Does electricity occupy space? A. No. Electricity is not ordinary matter, as, for example, lead is. Whatever it may be, it is not a material substance.

(10117) E. O. M. writes: I have two textbooks on physics which disagree. Mr. Spottiswoode, of London, had an induction coil made which gave a 42-inch spark. One says it required 5 Grove cells to give the 42-inch spark; the other says 30 Grove cells were required. Which is right? A. The statement in Gordon's "Electricity" is that with five Grove cells the coil gave a spark 28 inches long; with 10 cells the spark was 35 inches, and with 30 cells it was 42½ inches long. 2. What difference of potential was required to force the spark across the gap of 42 inches? A. We do not know. Probably hundreds of thousands of volts.

(10118) J. C. A. asks: Please inform me how to make a strong magnet of Jessop steel. I have tried to make some ½ inch square by 3 inches long, straight bars, by passing them through a spool of wire with a 300-volt current, by which they were strongly magnetized, but lost almost all magnetism in about three weeks. How can I make such magnets which will retain their strength for a long time? A. Heat the bars to be magnetized to a red heat and plunge them into water. They are then to be magnetized. Straight bars do not retain magnetism well. They should lie in pairs with opposite poles toward each other, side by side, not end to end, or else in pairs with an iron keeper across the poles. They may be laid four in a square with opposite poles against each other. Laid down alone without keepers, the magnetism is rapidly lost.

(10119) W. F. G. asks: Will vulcanized fiber answer for the insulation on static machines, and are vulcanite and vulcanized fibers identical? A. Vulcanized fiber will be but little better than wood as an insulator in this position. Vulcanite is hard rubber and is a different substance from fiber.

(10120) E. L. asks: 1. Can you tell me, without knowing the amperage, the voltage being 50 volts, if a 75-watt dynamo or 1-6 horse power as motor will light 5 lamps of 10 candle power at full capacity? A. Ten-candle lamps may be taken to be from 3 watts to 4 watts per candle. One lamp will consume from 30 watts to 40 watts, and 75 watts will light two such lamps. 2. What is the resistance of No. 16 iron wire? A. Pure iron has a resistance of 6 times as great as copper. Ordinary telegraph wire has a resistance 15 times as great as that of copper of the same size. No. 16 copper wire has 248.81 feet per ohm. Pure iron wire of the same size would have 41.47 feet per ohm, and No. 16 ordinary iron wire would have 16.19 feet per ohm. 3. If a current of 10 amperes at 108 volts goes through 540 feet of No. 16 iron wire, what will be the electromotive force and current remaining after it has gone through, and how to calculate it? A. There will be 10 amperes remaining. But there will not be any volts remaining, if the wire constitutes the entire circuit between the mains. The same amperes flow through the entire circuit and come out at the other end, just as the water flows through the entire length out of a pipe open at both ends and comes out at the other end. The drop of potential along a wire is proportional to its length, provided it is of uniform sectional area, as it may be presumed to be in this case. This being so, there will be a drop of one volt for each four feet along the wire. 4. Can we run a direct-current motor with an alternating current? The motor is not loaded. A. Yes; if it be started and brought up to synchronism with the current by hand, or by some other power. It will then keep step, and run by alternating current.

NEW BOOKS, ETC.

THE AMERICAN BATTLESHIP IN COMMISSION. By Thomas Beyer, U.S.N. Published by the Author. New York: Army and Navy Register. 12mo.; pp. 248.

The author of this work, Thomas Beyer, is a first-class ship fitter of the United States navy, an enlisted man who has given his views of the service. The amount of information contained in this book is certainly remarkable. The author begins with a general view of the organization of the navy, and then passes on to those subjects which laymen are most curious about. He tells, for example, how a battleship is prepared for a voyage; how it is handled at sea and in port; gives a clear picture of the daily life of the officers and men, and describes the drills of the week and their purpose. This chapter may be considered perhaps the most interesting in the book, inasmuch as it gives an enlisted man's own views of life on a man-of-war. The remaining portions of the work are devoted to chapters on the more material part of the bluejacket's life, such as the opportunities which the service offers him, his amusements and pastimes, the manufacture of ordnance and ammunition, the designing of a battleship. The last portion of the book is taken up with a collection of man-of-war yarns. The author is to be congratulated upon the praiseworthy manner in which the book has been issued. The illustrations are certainly the most interesting collection of pictures that we have ever seen. The typography is excellent. The book is one that we can heartily recommend for a good, clear, impartial account of the United States navy.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending August 21, 1906.

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents.]

Adding machine attachment, V. Stroh	829,357
Advertising device, Elder & Remick	829,064
Advertising machine, O. M. Thomson	829,040
Air brake system, F. B. Corey	829,143
Air pressure brake, E. Kramer	828,939
Amino alcohol, preparation of, E. Fourneau	829,262
Amino alkylesters, producing, E. Fourneau	829,374
Amusement device, W. N. Haslett	829,008
Animal trap, W. C. Hooker	829,338
Annunciator, automatic car, D. H. Marshall	829,080
Awl, G. L. Holt	829,154
Axle lubricator, car, J. A. Kennedy	829,159
Bale band applying device, Armstrong & Eddleman	829,051
Ballast mount, electrical, C. D. Enochs	829,373
Barrel, J. C. Parker	828,899
Bath cabinet, W. E. Monro	829,281
Battery and bell, combined, J. A. Ny and F. Meadows	829,122
Bearing, W. L. Kaylor	829,218
Bearing, rotary table, E. P. Bullard, Jr.	828,876
Bearing, spindle, W. L. Lindblom	829,165
Bearings, end thrust resisting means for, J. A. Perkins	829,085, 829,086
Beater roll with ventilated knife cells, F. Piesslinger	829,229
Bedclothes holder, N. C. Meek	829,118
Beer coil cleaning apparatus, C. A. Chandler	829,367
Beet blocker and cotton chopper, W. Ferris	829,067
Beet puller, M. W. Palmer	829,285, 829,286
Belt fastener, H. G. Ellis	829,146
Belt tightener, chain, J. A. Stone	829,091
Binder, F. A. Cleveland	829,322 to 829,326
Binder, loose leaf, S. C. Nott	829,225
Binder, loose leaf, E. A. Trussell	829,240
Binder, loose leaf, F. A. Cleveland	829,321
Blouse, S. Oppenheim	829,226
Boat, L. J. Butterfield	829,058
Boat lowering and hoisting apparatus for use on ships, life, J. Boag	829,054
Bobbin holder, S. W. Wardwell	829,306
Boiler scraper, F. Ludwig	829,024
Boiler stand, C. H. Foster	828,882
Book leaf holder, C. A. Monson	828,950
Bottle, antirefilling, O. Stegmaier	829,178
Bottle, non-refillable, B. Sharp	828,903
Bottle, non-refillable, C. Huenner	829,149
Bottle stopper, O. Del Guerra	829,145
Bottle stopper, G. Kirkegaard	829,341
Bottle, water, C. Krueger	828,891
Box joint, C. J. Olson	828,960
Brake shoe, A. Nelson	828,957
Brick machine, G. E. Luce	829,115
Bricks or other articles formed or constructed of clay, treating, J. Simons	829,177
Bridge, F. G. Borg	828,873
Briquet machinery, T. B. Wilcox	829,044 to 829,046
Briquets, preparing a mass for making, B. Wagner	829,042
Bromin substituted tannin urea derivative and making same, A. Voswinkel and R. Lauch	828,908
Brush, antiseptic shaving, A. Braunstein and A. Rattiner	829,364
Brush holder, H. M. Willis	829,047
Bucket hoisting and conveying means, two-rope grab, A. E. Brown	829,057
Building block, J. Crampton	828,930
Buildings, lifting plate and bolt for use in moving, J. C. Larsen	829,344
Buildings, tie or hanger for, H. C. Seipp	829,234
Bushing, roller, C. E. McIntire	829,223

Butter mold, N. W. Parker 829,287
Button for gloves, C. R. Weidmuller 829,359
Buttons, socket member of glove, C. R. Weidmuller 829,358
Buttonhole fly for trousers, C. W. Bartrum .. 828,918
Can, J. T. Ryan 829,036
Can fastener, paint, J. Olsen 829,169
Canceling machine, A. B. Pope 829,230
Canned food, apparatus for processing, J. S. Hughes 829,212
Car coupling, A. Moritz 829,347
Car coupling, W. J. Burran 829,366
Car fender, W. Pickett 829,289
Car seat backs, adjustable arm for reversible, R. L. Mangan 829,078
Car step, extension, E. S. Mitchell 829,280
Car wheels, lubricating, J. S. Smith 829,039
Carbureter, W. D. Lanard 828,940
Carbureter, A. W. Menns 829,345
Carbureter, air, W. E. Garvey 829,375
Carriage shift frames, lateral lock for, C. Roderick 829,089
Cement, rapid hardening of, H. Schneider .. 828,976
Cementitious products or artificial stone, apparatus for making, W. E. Jaques 829,014
Cementitious products or artificial stone, making, W. E. Jaques 829,012
Cementitious products or artificial stone, manufacturing, W. E. Jaques 829,013
Chafing iron, T. Galvin 829,005
Chain, elastic, G. Helps 829,009
Chuck, drill, G. H. Hollm 829,153
Churn, G. O. Powell 829,291
Churn, A. P. Basham 829,317
Cigar, J. Rosales 829,296
Cigar cutter, J. B. Fellows 829,199
Cigar cutter match server and lighter, automatic, M. J. Wcznack 829,048
Cigar machine, H. Knight 829,019
Circuit maker and breaker, C. J. Klein .. 829,162
Clasp, A. Shedlock 829,175, 829,176
Clip. See Tentering machine clip.
Clutch, F. L. Eager 829,003
Clutch, W. J. Cochran 829,140
Coal briquets, manufacture of, G. L. Croudace 828,999
Coat and similar garment, J. J. McLoughlin 829,029
Cock or water faucet, drain, R. C. Greenland 829,069
Cock, stop and waste, D. C. Powers 829,124
Coin controlled mechanisms and the like, casing for, R. W. Goeb 829,265
Collar, apparel, F. Draper 829,063
Color changing screen, S. Herr 829,337
Column clamp, J. L. Goss 829,266
Comb, C. J. Smith 829,235
Comb attachment, hair, U. L. Berger 828,872
Combing machines, silver conductor and apron guide or wool, J. A. Reynolds 828,968
Commode, A. W. Kinter 829,160
Composition, J. W. Hopper 829,155
Compound, J. R. Peck 829,031
Concentrator, E. Peters, G. E. Bauder and A. D. Campbell 828,963
Concrete articles, making ornamented molded, G. H. Bartlett 829,249
Concrete block machine, D. J. Ames 828,994
Concrete building block, D. J. Ames 828,993
Concrete column and the like, R. A. Cummings 828,931
Concrete constructing machine, A. A. Pauly 829,227
Concrete construction, A. A. Pauly 829,228
Concrete walls, construction of, D. Ewart 829,329
Confection machine, R. W. H. Crabb 829,097
Coop, chicken, J. W. Stevens 828,905
Copying press, J. A. A. D'Ayguesvives 829,246
Corn-sheller feeder, J. Tanner 829,181
Cotton chopper, N. Mabry 828,944
Counterbalancing device, E. P. Bullard, Jr. 828,875
Cradle-rocking attachment, B. Sarrett 829,354
Crucibles, protecting, R. A. McDonald 828,954
Cuff holder, J. M. Lucas 828,942
Culvert, Bardon & Wiberg 828,917
Cuspidor, adjustable sick-bed, W. B. Campbell 829,059
Cut-out, F. T. Wheeler 829,043
Cutter. See Cigar cutter.
Dam, adjustable, F. Pokorny 829,172
Damper-operating device, E. H. Weaver ... 828,911
Dental plugger, F. X. Mellen 829,119
Desk, folding drawer, A. G. Hough 829,156
Display device, P. R. Clare 828,926
Display envelop, J. Ward 828,989
Display rack, G. H. North et al 829,224
Distillation apparatus, automatic and continuous film, F. J. Clemenger 829,258
Diving apparatus, F. Knoff 829,274
Door, F. W. Newman 829,083
Door holder, W. M. Taylor 829,183
Door lock, sliding, I. N. Sweet 829,180
Door opening and closing device, H. C. Bundy 829,365
Door operating device, bulkhead, G. C. Ralston 829,352
Dough apparatus, P. D. Harton 829,270
Downdraft furnace, H. F. Norwood 828,898
Drier, Moore & Thomas 829,028
Drying and stretching frame, Allen & Hanna 828,915
Drying machine, continuous roller, B. Cohnen 829,141
Drilling machine, portable electric, J. Maclean 828,945
Drum, heating, V. J. Jirak 828,937
Edge finishing machine, L. Onderdonk 829,350
Egg poacher, S. Leach 829,020
Electric brake, C. G. Hardie 829,334
Electric brake, automatic, A. L. Duwelius .. 828,879
Electric heater, A. H. Carlson 829,318
Electric machine, W. A. Johnson 829,015
Electric motor control, M. W. Day 829,144
Electric motor starting device, M. Kallmann 829,340
Elevator brake, A. Sundh 828,983
Elevator safety device, C. E. Brown 829,094
Engine. See Gas engine.
Engine or motor, L. Goddu 829,201
Engines, cylinder head for, A. Russell 829,233
Eraser protector, rubber, W. N. Crisp 829,327
Erosion meter, H. Maxim 829,117
Excavating machine, C. C. Jacobs 829,214
Explosive, L. Barthelemy 829,362
Eyeglass and spectacle mounting, E. J. George 829,264
Eyeglass guard, C. H. Carnes 828,924
Eyeglass mounting, G. W. Wells 828,913
Eyeglasses and spectacles, G. A. Griffin .. 829,268
Fabric. See Pile fabric.
Fan, electric, H. D. Cessna 829,319
Fence post, J. F. Haffey 829,150
Fence post, G. Eichhorn 829,372
Fence, woven wire, H. C. Pratt 828,901
Fender. See Car fender.
Fender, J. P. Manson 829,079
File, paper and document, G. E. Schmidmer 828,974
Filter table, F. B. Leopold 829,021
Filters, washtrough for, F. B. Leopold 829,113
Filtering system, X. Caverno 828,925
Fire escape, A. W. Bartlett 829,134
Fire escape and the like, T. Hornsey 829,211
Fire kindler, H. Hill 829,072
Fire shutter, T. B. Jackson 829,339
Firearm, J. J. Murphy 829,082
Firearm, T. C. Johnson 829,215
Firearm, automatic recoil operative, W. H. Knowles 829,163
Firearm, magazine, C. G. Anderson 829,313
Fish hook, H. L. Phelps 828,964
Fish hook, Strozier & Wilson 829,302
Fish line reel, B. O. Rhodes 828,969
Flue expanding and beading tool, combined, J. V. Terry 829,303
Fodder binder, C. R. Pierce 828,900
Folding table and bucket holder, combined, H. Pike 828,965
Food products, manufacturing, A. R. D. Braga 829,253, 829,254
Fork, W. M. Tilton 829,304
Furnace, E. E. Jones 829,217
Fuse, percussion, Wilson & Leech 829,361
Gage, E. J. Clarke 829,368
Game board, E. M. Mikkelsen 829,222
Garment closure, H. C. Stanley 829,237
Garment or hose supporter, M. B. Gardner 829,147
Garment supporter, T. O. Moran 828,951
Gas burner safety attachment, S. H. Blodgett 829,136
Gas engine, B. B. Mears 829,279
Gas generator, acetylene, Nunn & Griffin .. 829,284
Gas producers, device for automatically regulating the supply of steam to, J. Delassue 829,060
Gas producers, regulating the temperature of combustion in, H. L. Doherty 829,105
Gases to the action of liquids, apparatus for subjecting, W. Feld 829,261
Gate. See Mineral gate.
Gate fastener, wire fence, E. J. Gilbert ... 829,007
Gear, changeable, W. R. Fox 829,068
Generators, means for controlling self-exciting, E. F. W. Alexanderson 829,133
Glass blowing machine, F. M. Hill, Jr. 829,210
Glass melting pot, H. C. Fry 829,200
Glass reheating apparatus, P. Ebeling 829,196
Glass surfaces and the like, decorating, W. Wachter 829,131
Glassware drilling machine, J. G. Martin. 828,894
Glove tipping machine, W. N. Marsden 828,947
Grade gage, W. Vogel 828,986
Grinding and polishing machine, C. C. Hill 828,885
Guide board and sign, W. P. Harmony 829,206
Guns, mechanism for extracting and ejecting spent cartridge cases in recoil, J. T. S. Schouboe 828,977
Hame, harness, J. Jeannotte 828,889
Harness hanger, J. A. Hammer 829,332
Harrow attachment, B. M. Voorhees 828,988
Harrow draft attachment, E. M. Noyer ... 828,959
Harvester, cane, A. Durieu, Jr. 829,328
Harvester platform adjustment, Dennis & Rice 829,101
Harvester reel adjusting mechanism, Dennis & Rice 829,061
Harvester reel supporting mechanism, E. A. Johnston 829,016
Harvesters, corn shock carrying and dumping attachment for, R. C. Storck 829,301
Hay rack, J. W. Latimer 829,076
Heater, R. H. Bradley 828,874
Heating systems, water level alarm for expansion drums of hot water, R. M. Dixon 829,103
Hinge, E. E. Hansen 829,070
Hinge, F. E. Sprague 829,236
Hoisting device, C. T. Wales 829,187
Horse releaser, G. W. Riddle 829,088
Horses and cattle, appliance for preventing wind sucking in, T. Kranz 829,343
Horseshoe, Holland & Buck 828,886
Horseshoe, F. W. Lindsley 829,114
Hydraulic press, H. Romunder 829,125
Ice box, W. H. Horner 829,011
Ice machine, vacuum, W. T. Hoofnagle 828,888
Ice, making clear, W. T. Hoofnagle 828,887
Illusion apparatus, C. Rosenfeld 829,034
Incubator, G. M. Curtis 829,000
Index, telephone, G. B. Adams 828,914
Indicator, H. A. Watson 829,243
Ingots, mechanism for piercing or shaping metallic, L. D. Davis 829,100
Insect destroyer, M. L. Sanborn 828,972
Journal box brass, J. S. Patten 829,170
Kiln, A. E. Truesdell 828,985
Knit muffler, M. Reichblum 828,967
Lace fastening device, J. Trusler 828,906
Lamp, R. M. Dixon 829,104
Lamp socket, electric, J. A. Mebane 829,027
Lamp, vapor, C. E. Trewhella 829,129
Lamps, ceiling block and electric cut out for incandescent, J. A. Mebane 829,026
Lantern, W. S. Hamm 829,331
Lathe, turning, F. Neudorff 828,897
Lavatory, C. Weelans 828,912
Life saving apparatus for ships, S. G. Stevens 829,179
Lifting jack, E. E. Thomas 829,238
Lightning arrester, Brelsford & Lutz 829,055
Linotype machine, D. A. Poe 829,290
Lock, F. A. Owens 828,961
Loom filling tension and controlling means, A. E. Burtt 828,922
Loom shuttle, Cunniff & Lacroix 829,259
Loom shuttle motion, G. Giussani 829,376
Looping machine attachment, W. Pearson. 828,962
Lubricating system, W. Hight 829,271
Lubricator, G. W. Carver 829,096
Lubricator, C. W. Manzel 829,166
Lubricator, M. S. Prichard 829,292
Mail bag delivering device, W. Irion 829,213
Mail bag lock, R. B. Rice 829,087
Mail crane and danger signal, T. B. Rowen 829,035
Malt turner, green, G. Weinbeer 829,307
Manacle, A. Eisaman 829,197
Match box, W. A. Pinckney 829,351
Measurer, dry, F. Kiefer 829,018
Meat hook, G. E. Thompson et al 829,239
Mechanical lubricator, W. Q. Pfahler 829,171
Metal furnace, A. Fisher 828,881
Milk, electrolytically treating, C. T. Willson 829,308
Mill feed, tube, J. Calwell 828,998
Mineral gate, R. E. Ball 829,316
Mixing apparatus, J. B. Strauss 829,127
Mixing machine, P. S. Ward 828,910
Mold, G. H. Bartlett 829,377
Mop, C. M. Cleveland 828,878
Motor control system, C. E. Bennett 829,135
Mouthpiece, W. Seefeldt 828,979
Music roll coupling device, E. S. Votey ... 829,185
Musical instrument player, E. S. Votey 829,184
Musical instruments, automatic player for, Chase & Bayer 828,877
Musical instruments, movable tracker for mechanical, E. S. Votey 829,186
Necktie fastener, W. A. Bennett 829,053
Newspaper and other printed matter, transferring, W. F. Barrett 829,193
Nozzle holder, C. S. Northrop 829,084
Numbering machine, W. C. Downing 829,260
Nut lock, Henry & Powers 829,209
Nut lock, A. A. Jones 829,216
Nut lock, J. V. Berry 829,363
Oil drip cup, J. Muir 828,896
Oiler, overhead, N. J. Tubbs 828,907
Overload safety apparatus, P. J. Darlington 829,371
Overseaming machine, L. Onderdonk 829,349
Oyster shucking knife, J. A. Rand 829,353
Packing, piston rod, L. H. Martell 829,116
Pavement, P. C. Reilly 829,293, 829,294
Pavement or roadway, T. N. Badger 829,247
Paving, wood, J. Duffy 829,002
Peanut stemmer, C. F. Nelms 829,348
Pedal action, noiseless, C. E. Forsythe 829,004
Pen, fountain, G. F. Brandt 828,920
Pen, fountain, W. W. Sanford 828,973
Phonograph horn, W. S. Fernan 829,066
Phonograph reversing gear, A. W. Cole ... 829,195
Phonographs, frictional reproducing attachment for, A. N. Pierman 829,123
Picture frame and mount, combined, F. W. Sweet 828,984
Pictures, projecting, B. A. Levy 829,276
Pile, composite metal, W. Stubblebine 828,982
Pile fabric, woven, F. A. Whitmore 829,189
Pilot wire control system, single, C. M. Clark 829,139
Planter, E. B. Hackburn et al 829,204
Planter, corn and cotton, F. K. Lathrop ... 829,112
Pole step, J. H. Haycock 829,336
Portable bracket or scaffolding, B. C. Alberty 829,312
Poultry dusting device, automatic, M. A. Hawley 829,207
Power brake, L. Pfingst 829,032
Power transmitting device, T. L. & T. J. Sturtevant 829,128
Press, V. D. Anderson 829,314, 829,315
Printing machine, stencil, J. A. Ambler .. 829,049
Printing press bronzing attachment, S. R. Kramer 829,074
Printing press feeder, M. J. Barnett 829,248
Propelling mechanism for vessels, P. A. Coupal 829,378
Propulsion, means for vessel, T. Ronstrom 829,033
Pulp molding machine, G. R. Ward 828,909
Pulverizer, J. C. Clark 828,927
Pulverizing mill, A. J. Sackett 829,173
Pump, J. Jordan 829,017
Pump, A. Schluter 829,355
Pump, self-measuring oil, J. B. Davis 829,001
Pumping apparatus, I. G. Mitchell 829,346
Punch, ticket, H. Killacky 829,273
Punching bag apparatus, H. E. Cary 829,257
Punching machine, W. E. Lindsay 829,277
Punching machine, work feeding, O. S. Beyer 829,250
Puzzle, E. D. Falkner 828,880
Rail brace plate, guard, G. W. Merrell 828,949
Rail joint, L. A. Ball 829,052
Rail joint, A. Ettlin 829,065
Rail joint, T. Brookfield 829,255
Railway block signal, automatic, H. M. Abernethy 829,309
Railway brake, A. H. Marden 829,221
Railway cross tie, composite, J. H. G. Wolf 828,991



"Star" Foot and Power Screw Cutting Automatic Cross Feed Lathes
FOR FINE, ACCURATE WORK
Send for Catalogue B.
SENECA FALLS MFG. CO.
695 Water Street,
Seneca Falls, N.Y., U.S.A.

Engine and Foot Lathes
MACHINE SHOP OUTFITS, TOOLS AND SUPPLIES. BEST MATERIALS. BEST WORKMANSHIP. CATALOGUE FREE!
SEBASTIAN LATHE CO., 120 Culvert St., Cincinnati, O.

PATENTS
Our Hand Book on Patents, Trade-Marks, etc., sent free. Patents procured through Munn & Co. receive free notice in the
SCIENTIFIC AMERICAN
MUNN & CO., 361 Broadway, N. Y.
BRANCH OFFICE: 625 F St., Washington, D.C.

A GOOD INVESTMENT
For $1.75 we will send by express (not prepaid), complete N. D. Outfit with full instructions for learning

TELEGRAPH OPERATING.
A fascinating study that will enable you to earn good wages
Send for our catalog.
Established 1879.
J. H. BUNNELL & Co., Inc. 20 Park Place New York


THE BARKER MOTOR
has from the first shown itself to be of superior design. Mechanical ideas of proven worth, combined with the best materials and careful attention to details make it
THE LEADER OF ITS CLASS.
C. L. BARKER, NORWALK, CONN.

A. B. C. Automobiles
Easy to Buy, Easy to Operate, Easy to Keep — $300 — No Valves, No Springs, No Gears, No Cams, No Tires to Puncture

Simplest and most durable Automobile ever made. Built like a buggy for any country or city road. Any speed up to 20 miles per hour forward and the reverse. Write at once for particulars.
Auto Buggy Mfg. Co., 4390 Olive St., St. Louis

STEAM TURBINES.—THEIR CONSTRUCTION, Operation and Commercial Application. SCIENTIFIC AMERICAN SUPPLEMENTS 1306, 1307, 1308, 1422, 1400, 1447, 1370, 1372. The articles have all been prepared by experts in steam engineering. Price 10 cents each, by mail. Munn & Co., 361 Broadway, New York City, and all newsdealers.

It's Easy to Keep Cool!
The simplest, smallest, safest, neatest and most successful Motor Fan made is the Rawlings Patent High-Speed Water Motor Fan. Can be installed in a few minutes. No operating expenses. Made of high-grade brass. Price 14-in. Fan with complete couplings, $10.00.

E. GINTZEL
150 Nassau St., New York City

Asbestos and Magnesia Products
STEAM PIPE AND BOILER COVERINGS.
ASBESTOS PACKING (For all purposes).
ASBESTOS FIRE-RESISTING CEMENTS.
ASBESTOS BUILDING MATERIALS.
"J-M" ASBESTOS ROOFING.
ASBESTOS FABRICS.
KEYSTONE HAIR INSULATOR.
ELECTRICAL SUPPLIES.
H. W. JOHNS-MANVILLE CO.
New York, Milwaukee, Chicago, Boston, Philadelphia, St. Louis, Pittsburg, Cleveland, New Orleans, Kansas City, Minneapolis, Dallas, San Francisco, Los Angeles, Seattle, London.

CLINTON, MICH., Dec. 21, 1905.
BRENNAN MOTOR CO., Syracuse, N. Y.
GENTLEMEN:—The 20 H. P. Motor I bought of you three years ago, to run my ice harvester, is a dandy. It is simple, easy to control and cheap as to fuel.
I did my threshing with it, running a large separator, with blower for stacking, and it seemed to run with as much power, if not more, than the large steam engine. Crowds of people came to see the little thing run such a large machine and do the work so easily. It took about three hours to thresh over 400 bushels of grain and we did not stop once.
Any one wanting a motor will make no mistake if they get a Brennan.

Yours very truly, J. B. HAUSE.
BRENNAN STANDARD MOTOR
Mounted with Individual Clutch Gear, also Furnish Sliding Gear Transmission.
Motors from 6 to 80 Horse Power.


THE "LEADER."
1½ H. P. Gasolene Auto-Marine Engine
Built like a watch. Beautifully Finished. Accurately Constructed. Light, Strong, Reliable, and Noiseless in operation. Suitable for launches from 15 to 19 feet in length. Price complete, $75 net, no discount. Thoroughly guaranteed. Perfect Speed Control. Complete descriptive Catalog upon application. Manufactured by
CLAUDE SINTZ,
292 S. Front St., Grand Rapids, Mich.


FOR GUNSMITHS, TOOL MAKERS, EXPERIMENTAL & REPAIR WORK, ETC.
From 9-in. to 13-in. swing. Arranged for Steam or Foot Power, Velocipede or Stand-up Treadle.
Send for Lathe Catalog.
W. F. & JNO. BARNES CO.
Established 1872.
1999 Ruby St., ROCKFORD, ILL.

How To Increase Your Business
READ carefully, every week, the Business and Personal Wants column in the
Scientific American
This week it will be found on page 161.
Some week you will be likely to find an inquiry for something that you manufacture or deal in. A prompt reply may bring an order.
Watch it Carefully


CURTISS AIRSHIP MOTORS
7 H. P., 50 Pounds.
All extras ready to install. Now used by every successful aeronaut. Highest Award at Lewis & Clark Exposition. World's Record, Ormond Beach, Fla.
Send for Catalogue B.
G. H. CURTISS MFG. CO.
Hammondsport, N. Y.

ROTARY PUMPS AND ENGINES. Their Origin and Development.—An important series of papers giving a historical resume of the rotary pump and engine from 1588 and illustrated with clear drawings showing the construction of various forms of pumps and engines. 38 illustrations. Contained in SUPPLEMENTS 1109, 1110, 1111. Price 10 cents each. For sale by Munn & Co. and all newsdealers.

A MOTOR CYCLE AT SMALL COST
by using one of our Attachable Outfits. Also Motors and Accessories for Bicycle, Automobile, Marine and Stationary
Send 2c. stamp for catalogue

STEFFEY MFG. CO., 2941 W. Girard Ave., Phila., Pa.

September in the Adirondacks
No finer place can be found than the Adirondacks in September.
The air is cool and bracing, the scenery beautiful and the sense of perfect rest that comes with the night is delightful.
This wonderful region is reached from all directions by the
NEW YORK CENTRAL LINES
"America's Greatest Railroad"
For a copy of "The Adirondack Mountains and How to Reach Them," send a two-cent stamp to George H. Daniels, Manager General Advertising Department, Grand Central Station, New York.
C. F. DALY
Passenger Traffic Manager
NEW YORK

Railway cross tie, switch tie, and head block, Madden & Simpson..... 829,278
Railway crossings, apparatus for preventing collisions at, Barnes & Green..... 828,871
Railway, pleasure, R. Buchanan, Jr..... 828,921
Railway, pleasure, W. J. Browne..... 829,256
Railway rail tie, Mowery & Humphrey.... 829,282
Railway semaphore signal, H. M. Abernethy 829,311
Railway signal, J. Knight..... 829,342
Railway signal system, R. O. Turner..... 829,241
Railway signaling, electric circuit and apparatus for, H. W. Spang..... 828,980
Railway tie, W. W. Green..... 829,203
Railway track appliance, C. F. Clawson... 828,929
Railway traffic controlling system, C. W. Coleman 829,142
Railways, rope grip for suspended rope, O. Brix 829,056
Rake, J. W. Crawford..... 829,370
Rat, bird, and rabbit trap, E. P. Lower... 829,023
Ratchet, double acting, E. Henrikson..... 828,884
Refining, circulating apparatus for, T. E. Smith 829,856
Refrigerator, A. Miller..... 829,167
Register, F. C. Carroll..... 829,138
Renovator, S. E. Allison..... 828,916
Resistance unit, E. Schattner..... 829,174
Rheostat, A. L. Hadley..... 829,148
Rheostat, motor starting, Hall & Yates.... 829,151
Rheostat, motor starting, D. C. Jackson.... 829,272
Rim, sectional, W. G. Marr..... 828,893
Rock drilling machine, B. Cammas..... 828,923
Rock drilling machine or engine, Hellman & Bayles 829,071
Rotary engine, C. Luker..... 828,943
Rotary engine, J. F. Bridges..... 828,997
Rotary motor, A. Primat..... 829,231
Rotating masses, means for automatically balancing, J. V. Booraem..... 829,251
Rubbing and polishing machine, C. S. Yarnell 829,191
Saw, combined hack and wood, T. Keepfer.. 829,158
Saw set, G. B. Lebler..... 829,219
Screen. See Color changing screen.
Screening apparatus, J. C. Clark..... 828,928
Screw driver and other hand tool, Mueller & Braunsdorf..... 828,895
Sealing machine, envelop, J. E. Nachod.... 829,030
Sealing means for vessels, J. M. Hicks..... 828,936
Semaphore, electric, J. F. Webb..... 829,132
Semaphore signals, spectacle frame for, H. M. Abernethy 829,310
Sewing machine attachment guide, G. J. Stevens 829,126
Sewing machine stop motion, Hayes & Siebert 829,208
Sewing machine tucking guide, E. Serodino 829,298
Shade pull, M. J. Clark..... 829,320
Shafting, machine for cutting key seats in, K. Matheus 828,948
Shears, J. J. Van Broekhoven..... 829,305
Sheet metal vessel, G. W. Weber..... 829,244
Ship coaling apparatus, W. A. Collins..... 829,369
Sign board, R. E. Sage..... 829,090
Signal. See Railway signal.
Signaling device, electrical, C. M. Allen.. 829,192
Signaling system, selective, S. A. Reed..... 828,966
Skate, snow, C. Anderson..... 829,050
Skirt marker, A. C. McDonnell..... 828,955
Slideway, spiral, W. H. Logan..... 829,022
Soot scraper, A. H. Blackburn..... 828,996
Speed mechanism, variable, J. F. Warner.. 829,242
Speed warning device, double signal, S. L. Saunders 828,902
Spirometer, E. A. Reeves..... 829,232
Spools and other articles, holder for, O. A. Eschholz 829,198
Spring wheel, S. L. Taylor..... 829,182
Square, T and angle, J. Brauchli..... 829,137
Stacker hood, wind, A. H. & H. A. Berns.. 823,919
Stair, S. Grossman..... 829,107
Staircase, traveling, E. L. Hocquart..... 829,152
Stand. See Boiler stand.
Starching machine, W. J. Asher..... 828,860
Steam and hot water boiler, E. O. Haskins 829,335
Steering device, G. A. Gemmer..... 829,006
Stereotyping apparatus, S. G. Goss..... 829,202
Stopper. See Bottle stopper.
Stove, combined cooking and heating, O. S. Landers 829,075
Stubble cutting attachment, J. M. Greenshields 829,339
Suprarenalin, extracting, Manns & Koch.. 829,220
Table. See Filter table.
Tag fastening device, shipping, J. W. Dollman 829,062
Telegraphic transmission of written characters, apparatus for the, A. Franke.... 829,263
Telegraphy, C. A. Johnson..... 828,890
Telephone receiver, R. H. Manson..... 828,946
Telephone switchboard lamp, J. L. Wright.. 829,092
Telephone trunking system, Lattig & Goodrum 829,164
Telescope for submarine and submergible boats, Neumayer & Jacob..... 829,121
Templet, J. K. Graham..... 829,207
Tentering machine clip, A. A. Whitley.... 829,360
Textile materials, apparatus for treating, R. Weiss 829,188
Thawing apparatus, E. A. Burbank..... 829,095
Tie. See Railway tie.
Tobacco packing machine, R. L. Patterson 829,288
Tool holding and self locking attachment, E. R. Moras..... 829,081
Tooth powder can, J. E. Lee..... 829,275
Toy, Ayers & Keen..... 828,995
Toy house, H. J. Sonder..... 828,904
Trap. See Animal trap.
Trimming machine, A. Lasance..... 829,111
Trolley wheel, J. M. King..... 829,073
Trolley wheel fork, E. W. Keating..... 829,100
Truck bolster, Barber & Webb..... 828,870
Tubes, machine for treating pliable, A. J. Cumnock 829,098
Tunnels, constructing subaqueous, Wilgus & Carson 829,190
Turbine, elastic fluid, C. W. Dake..828,932 to 828,934
Type distributing machine, F. A. Johnson.. 829,157
Typewriter carriage, Griffiths & Ingersoll.. 829,106
Typewriting machine ruling device, S. Horr 829,108
Typewriting machines, line lock device for, J. B. Secor..... 829,297
Typewriting machines, marginal paper guide for, A. A. Anderson..... 829,093
Umbrella, J. A. Whittington..... 828,990
Valve, W. I. Staaf..... 828,981
Valve controlling mechanism, time gas, J. Gunning 829,269
Valve for controlling fluids, G. A. Mumford 829,120
Vanillin, etc., making, E. C. Spurge..... 829,300
Vegetable cutter and slicer, A. C. Matthews 829,025
Vehicle, R. G. Roberts..... 828,970
Vehicle jack, W. H. Hampson.....829,205, 829,333
Vehicle steering device, J. Morig..... 828,952
Vehicle wheel and axle, M. Conrad, reissue 12,522
Vehicles and the like, driving mechanism for, D. Kiser..... 829,110
Vending machine, T. C. Asplund..... 829,245
Vending machine, cigar, O. B. Ross..... 828,971
Ventilator, R. M. Dixon..... 829,102
Vessels through water, means of reducing the resistance to the motion of, C. Del Lungo 829,077
Vibrator, therapeutic, F. H. Volley..... 828,987
Violin bows, device for hairing, F. A. Hart 828,883
Voting booth, folding, Douglas & Johnson.. 828,935
Voting machine, F. I. Sears..... 828,978
Voting machine, Van den Heuvel & Galman 829,130
Wagon brake, W. H. Loper..... 828,941
Washing machine, P. Schmit..... 828,975
Washing machine, H. Borneman..... 829,252
Water level indicator, L. Kjerulff..... 829,161
Water, removing impurities from, B. Kniffler 828,938
Weaning muzzle, E. P. Seward..... 829,038
Weather strip for doors, W. H. McLeod.. 829,168
Web treating and cutting machine, A. J. Cumnock 829,099
Weighing apparatus, E. A. Carmichael.... 829,194
Weighing mechanism, C. Skidmore..... 829,299
Weight motor, Yapp & Ellis..... 828,992
Welding machine, metal, L. Roehr..... 829,295
Well strainer, J. H. McEvoy..... 828,956
Wheel. See Spring wheel.
Wheel, Screpel & Broux..... 829,037
Wheel fender, W. H. Lake..... 828,892
Wick construction, lamp, J. H. Morrison.. 828,953
Window, Z. L. Trainham..... 829,041
Wire stretcher and holder, Hiniker & Beckwith 829,010
Woodworking machine rotary cutter, A. W. Nelson 828,958
Wrench, F. McMillan..... 829,283

"TIRED!
THEN
DRINK
Coca-Cola
IT RELIEVES EXHAUSTION
When the BRAIN is running under full pressure send down to the FOUNTAIN for a glass of
Coca-Cola
you will be surprised how quickly it will ease the Tired Brain—soothe the Rattled Nerves and restore Wasted Energy to both Mind and Body.
It enables the entire system to readily cope with the strain of any excessive demands made upon it.
AT ALL FOUNTAINS
ALSO IN BOTTLES 5c.



Motor Castings

We furnish castings for eight different motors, 1½ to 5 H. P., air and water-cooled. Also complete motors for airships, runabout, bicycle and marine purposes. Send stamp for complete motorcycle supply catalogue. The only one of its kind published.
Second-hand Motorcycles $40 up. Send for List No. 102.
HARRY R. GEER CO.
1015 Pine St., St. Louis, Mo.

The Genuine Armstrong's STOCKS and DIES

Acknowledged to be the best. Different sizes and capacities. Write for catalog.
THE ARMSTRONG MFG. CO., Bridgeport, Conn.
New York Office, 139 Centre Street

RADIUM AND THE RADIO-ACTIVE Substances. No better or clearer scientific account has been published than that contained in SCIENTIFIC AMERICAN SUPPLEMENT **1429**. The paper presents all that is at present known about radium and the radio-active substances. Price 10 cents, by mail. Munn & Co., 361 Broadway, New York City and all newsdealers.

THE INTERNAL WORK OF THE Wind. By S. P. LANGLEY. A painstaking discussion by the leading authority on Aerodynamics, of a subject of value to all interested in airships. SCIENTIFIC AMERICAN SUPPLEMENTS **946** and **947**. Price 10 cents each, by mail. Munn & Company, 361 Broadway, New York City, and all newsdealers.



Stallman's Dresser Trunk

Easy to get at everything without disturbing anything. No fatigue in packing and unpacking. Light, strong, roomy drawers. Holds as much and costs no more than a good box trunk. Hand-riveted; strongest trunk made. In small room serves as chiffonier. C.O.D. with privilege of examination.
2c. stamp for Catalog.
F. A. STALLMAN, 61 W. Spring St., Columbus, O.

To Book Buyers

We have just issued a new 48-page catalogue of recently published Scientific and Mechanical Books, which we will mail free to any address on application.

MUNN & COMPANY
Publishers of SCIENTIFIC AMERICAN
361 Broadway, New York

Keystone Well Drills



for Artesian and Ordinary Water Wells; Mineral Prospecting and Placer Testing for Dredgers; Deep Drilling for Oil and Gas; Contractor's Blast Hole Drilling, River and Harbor Exploration, etc. Our five catalogs are text-books in these lines.
KEYSTONE WELL WORKS
Beaver Falls, Pa.

Orient Friction-Drive Buckboards, 1907 Models



TWO-PASSENGER RUNABOUT $400

Specifications for Two-Passenger Runabout—
Motor.—Single cylinder, 4 h. p. air-cooled.
Cylinder.—3¼ bore, 4¼ stroke.
Steering.—Tiller.
Wheel Base.—80 inches.
Tread. 42 inches.
Weight.—600 pounds; crated, 800 pounds.
Speeds.—4 forward, 2 reverse.
Clearance. 10 inches.
Tires.—Single tube, 26x2½.
Double tube tires, $30 extra, net.
Swinehart solid tires, $85 extra, net.
Speed.—Maximum 25; minimum, 4 miles per hour.
Average 12 to 20 miles on ordinary roads.



DELIVERY CAR $450
It does the work of three teams

Specifications for Delivery Car—
Motor.—4 h. p., air-cooled.
Steering.—Lever.
Wheel Base.—89 inches.
Tread.—42 inches.
Weight.—670 pounds; crated, 850 pounds.
Speeds.—4 forward, 2 reverse.
Clearance.—10 inches.
Capacity.—600 pounds, including passengers.
Tires.—Same as Runabout.
Carrying dimensions, 62 inches long, 26 inches wide, 8½ inches deep.
Speed.—4 to 18 miles per hour on ordinary roads.

Energetic agents desired in unassigned territory. Write for particulars.
WALTHAM MANUFACTURING COMPANY . Waltham, Mass., U. S. A.

DESIGNS.

Billiard table, C. F. Kurz.....38,189, 38,190
Box cover, T. W. Foster..... 38,182
Brush back, T. W. Foster..... 38,181
Clock support, W. E. McGraw..... 38,187
Glove, F. L. Easterly..... 38,191
Inkstand, C. H. Numan..... 38,186
Mirror back, T. W. Foster.....38,179, 38,180
Mirrors, brushes, and similar toilet articles, back for, G. H. Berry..... 38,177, 38,178
Mirrors, brushes, or similar articles, back for, P. J. Callowhill..... 38,175
Mirrors, brushes, or similar articles, back for, S. A. Keller..... 38,176
Pin, stick, W. M. Dake..... 38,174
Reflector, artificial light, K. Booth..... 38,188
Spoon or fork, A. Miller..... 38,184
Toilet compound receptacle, T. W. Ball.... 38,183
Toy, inflatable, C. Coller..... 38,185

TRADE MARKS.

Analgesics, El Zernac Co..... 55,677
Anchors, Thomas Laughlin Co..... 56,104
Anesthetics, Farbwerke vorm. Meister Lucius & Bruning 55,744
Antiseptics, Frederick Stearns & Co..... 55,745
Atomizers and powder blowers, De Vilbiss Manufacturing Co..... 56,005
Bagging, American Manufacturing Co. 55,963, to 55,965, 56,028 to 56,030
Bags, seamless woven, Stark Mills..... 55,789
Bakery products, certain named, Mountain City Mill Co.....55,931 to 55,933, 56,073
Baking powder, L. K. Adams..... 55,654
Beef, pickled or corned, Swift & Co..... 56,103
Beer, Clinton Brewing Co..... 55,667
Beer, Consumers' Brewing Co..... 55,670
Beer, Pittsburgh Brewing Co..... 55,707
Beer, Pabst Brewing Co..... 55,858
Beer, A. J. Houghton Co..... 55,869
Beer, Anheuser-Busch Brewing Association 55,870
Beer, Suffolk Brewing Co..... 55,995
Beer, lager, Iroquois Brewing Co..... 55,875
Beer, lager, Peter Schoenhofen Brewing Co. 55,880
Beet pullers and potato diggers, Moline Plow Co. 56,018
Belting, leather, Baltimore Belting Co.... 55,918
Belting, leather, Baltimore Belting Co..... 55,935
Beverages, certain named, Sprague, Warner & Co. 55,882
Beverages, certain named, Equinox Co..... 55,926
Beverages, certain named, F. Seely..... 56,088
Beverages, fermented milk, W. E. Beall.. 55,873
Beverages made from coca leaves, Murfreesboro Bottling Works..... 55,878
Beverages, non-alcoholic extract and syrup for the making of, Peek Beverage Co.. 55,705
Bicycles, M. E. Johnson..... 56,014
Biscuits, Cereal Laxative Co..... 55,807
Bitters or tonics, stomach, F. S. Amidon.. 55,727
Bitters, stomach, T. Lappe..... 55,692
Blood purifiers, cough and worm syrup, and liniment, S. B. Goff & Sons Co..... 55,716
Boots and shoes and leather used in their manufacture, leather, Rice & Hutchins.. 55,712
Boots and shoes, leather, Commonwealth Shoe and Leather Co.....55,669, 55,734
Boots and shoes, leather, Fred F. Field Co. 55,940
Boots, shoes, and slippers, leather, M. D. Wells Co..... 55,946
Boots, shoes, and slippers, leather, P. Holmes & Co..... 55,948
Boots, shoes, slippers, and soles, certain named, Morse & Rogers..... 55,828
Brandy, California Wine Association..... 55,730
Brandy, J. S. Draper..... 56,066
Bread, cake, pastry, and crackers, George G. Fox Co..... 55,941
Brick and terra cotta, face and fire, Federal Clay Product Co..... 55,894
Bronze powders and bronzing liquids, G. Benda 55,844
Brushes, tooth, Sanitol Chemical Laboratory Co. 56,086
Burglar alarms, electrical, American Bank Protective Co..... 55,934
Butter, James Rowland & Co..... 55,876
Candy, F. M. Switzer..... 55,838
Candy, J. G. Arcand..... 55,843
Candy kisses, Ginter Grocery Co..... 55,817
Cans, J. H. Chidester..... 56,004
Cantaloups, A. F. Young & Co..... 55,799
Car bolster, E. H. Benners..... 55,729
Caramels, Blanke-Wenneker Candy Co..... 55,804
Cartridge shells, Union Metallic Cartridge Co. 56,024
Catchup, Curtice Brothers Co..... 55,813
Catchup, tomato, Donahue Brothers..... 55,814
Cement for mending purposes, adhesive, U. S. Chemical Rubber Co..... 55,863
Cereals pressed into a wafer, preparation of uncooked, F. F. Potter..... 55,831
Chains and bracelets, plated, O. M. Draper.. 56,012
Chains and parts thereof and attachments therefor, ornamental, O. M. Draper..... 56,042
Champagne, Empire State Wine Co..... 55,678
Champagne, Blondeau, Berque & Co..... 55,803
Chemical preparation to clear rainwater, Crates & Bowen..... 55,811
Cigars, Tracy & Avery Co..... 56,106
Cigars and cheroots, E. Seidenberg, Stiefel & Co..... 55,893
Cinchona alkaloids, derivatives of, Vereinigte Chininfabriken Zimmer & Co., Ges. mit beschrankter Haftung 55,723
Clocks and watches, Western Clock Manufacturing Co..... 55,865
Cloth, blue print, E. G. Soltmann..... 55,954
Cloth cutting machines, Universal Cutter Co. 56,025
Cloth, hair, Gordon Brothers..... 56,041
Coal, United States Coal & Oil Co..... 55,864
Cocoa, chocolate, broma, and cocoa preparations, Walter Baker & Co..... 55,841
Codfish, shredded, J. W. Beardsley's Sons.. 55,755
Coffee, Sprague, Warner & Co..... 55,622
Coffee, Woolson Spice Co..... 55,627
Coffee, J. K. Bowen..... 55,659
Coffee, Querbacker Gilmore Co..... 55,703
Coffee, Nave-McCord Mercantile Co..56,074, 56,075
Coffee, New York Coffee Co..... 56,076
Coffee, Woolson Spice Co..... 56,101
Coffee in the bean, F. H. Beimes..... 55,920
Coffee, roasted and ground, Enterprise Coffee Company of Baltimore City..... 55,603
Coffee substitute, T. D. Floto..... 55,815
Collars, linen, Schein & Lasday..... 55,991
Compound, soluble, Chelf Chemical Co..... 55,973
Cordial, Societe Anonyme de la Distillerie de la Liqueur Benedictine de l'Abbaye de Fecamp 55,719
Cordials, Colburn, Birks & Co..... 55,733
Cornmeal, Seneca Mill & Elevator Co..... 55,942
Corsets, G. Chandler..... 55,923
Cotton duck, Mount Vernon-Woodberry Cotton Duck Co..... 55,640
Cotton piece goods, Amory, Brown & Co.... 55,590
Cotton piece goods, Everett Mills..... 55,605
Cotton piece goods, J. & J. M. Worrall..... 55,610
Cotton piece goods, Massachusetts Cotton Mills .....55,613 to 55,616
Cotton piece goods, Tremont & Suffolk Mills 55,651
Cotton piece goods, Massachusetts Cotton Mills 55,763, 55,985
Cotton piece goods, bleached and half-bleached, G. Willis & Co..... 56,099
Cotton sateens, Bradford Dyers' Association 55,968
Court plaster substitute, Douglas Manufacturing Co..... 55,673
Crackers, Century Biscuit Co..... 55,806
Crackers and biscuits, G. H. Timmerman... 55,839
Cream, face, Sanitol Chemical Laboratory Co. 56,051
Cream, toilet, Mistletoe Manufacturing Co.. 55,697
Creosote and guaiacol, Hartmann & Hauers 55,635
Cutlery, certain named, J. S. Holler & Co.. 56,044
Dandruff cure and scalp invigorator, J. B. Tatreau 55,911
Dentifrice, Sanitol Chemical Laboratory Co.. 55,990
Disinfectants, Krix-ol Chemical Co..... 55,637
Disinfectants in liquid and powdered form, Masury, Young & Co..... 55,638
Dress waists, dress skirts, coats, and wraps, ladies', Queen Manufacturing Co..... 55,987
Dyes for treating fabrics, William Edge & Sons Co. 55,725
Dyspepsia cure, S. B. Goff & Sons Co..... 55,717
Electrical insulating and protective devices, Johns-Pratt Co..... 56,013
Extracts and crystals, Logwood, West Indies Chemical Works 55,795

Valuable Books

Home Mechanics for Amateurs

This book has achieved an unparalleled success in one week, and a Special Edition of 4,000 copies has been ordered. It is by far the largest and best book on the subject ever offered at such a low price. It tells how to make things the right way—the "only" way—at small expense. It will prove of value to you—much more than you realize. Do things with your hands. Send for a circular giving contents—the circulars cost only a cent—the book $1.50 postpaid. If the book could meet you face to face you would be the first to purchase. The first large edition is almost gone, order to-day.



370 Pages 326 Engravings Price $1.50

TWENTY-THIRD EDITION

EXPERIMENTAL SCIENCE.

By GEORGE M. HOPKINS

Revised and Greatly Enlarged. 2 Octavo Volumes. 1,100 Pages. 900 Illustrations. Cloth Bound, Postpaid, $5.00. Half Morocco, Postpaid, $7.00.

EXPERIMENTAL SCIENCE is so well known to many of our readers that it is hardly necessary now to give a description of this work. Mr. Hopkins decided some months ago that it would be necessary to prepare a new edition of this work in order that the many wonderful discoveries of modern times might be fully described in its pages. Since the last edition was published, wonderful developments in wireless telegraphy, for example, have been made. It was necessary, therefore, that a good deal of new matter should be added to the work in order to make it thoroughly up-to-date, and with this object in view some 200 pages have been added. On account of the increased size of the work, it has been necessary to divide it into two volumes, handsomely bound in buckram.



REVISED and ENLARGED EDITION

The Scientific American

Cyclopedia

Of Receipts, Notes and Queries.

15,000 Receipts. 734 Pages.

Price, $5.00 in Cloth. $6.00 in Sheep. $6.50 in Half Morocco. Post Free.



This work has been revised and enlarged,

900 New Formulas.

The work is so arranged as to be of use not only to the specialist, but to the general reader. It should have a place in every home and workshop. A circular containing full **Table of Contents** will be sent on application.

Those who already have the Cyclopedia may obtain the

1901 APPENDIX.

Price, bound in cloth, $1.00 postpaid.

MAGIC

Stage Illusions and Scientific Diversions, including Trick Photography

This work appeals to old and young alike, and it is one of the most attractive holiday books of the year. The illusions are illustrated by the highest class of engravings, and the exposés of the tricks are, in many cases, furnished by the prestidigitateurs themselves. Conjuring, large stage illusions, fire-eating, sword-swallowing, ventriloquism, mental magic, ancient magic, automata, curious toys, stage effects, photographic tricks, and the projection of moving photographs are all well described and illustrated, making a handsome volume. It is tastefully printed and bound. Acknowledged by the profession to be the **Standard Work on Magic.**

By A. A. HOPKINS. 568 pages. 420 illus. Price **$2.50.**

JUST PUBLISHED

Scientific American Reference Book

12mo. 516 Pages. Illustrated. 6 Colored Plates. Price $1.50, postpaid



The result of the queries of three generations of readers and correspondents is crystallized in this book, which has been in course of preparation for months. It is indispensable to every family and business man. It deals with matters of interest to everybody. The book contains 50,000 facts and is much more complete and more exhaustive than anything of the kind which has ever been attempted. The "Scientific American Reference Book" has been compiled after gauging the known wants of thousands. It has been revised by eminent statisticians. Information has been drawn from over one ton of Government reports alone. It is a book of everyday reference—more useful than an encyclopedia, because you will find what you want in an instant in a more condensed form. Sixty years of experience alone have made it possible for the publishers of the SCIENTIFIC AMERICAN to present to the purchasers of this book a remarkable aggregation of information.

MUNN & CO., Publishers, 361 Broadway, NEW YORK

Extracts containing caffein, theine, and caffeo-tannic acid, vegetable, Dr. Graf & Comp	55,982
Extracts, flavoring, Sprague, Warner & Co..	55,835
Extracts for making beverages when diluted with water, E. T. Wills	55,867
Eye water, F. M. Jones	55,898
Fabrics, bleached and unbleached textile, E. J. Fraser-Campbell 55,981, 56,009,	56,010
Fabrics, printed and dyed textile, Eddystone Manufacturing Co.	55,602
Feed, mixed, Lawrence Feed Co.	55,825
Fertilizers, Rasin-Monumental Company of Anne Arundel County	55,709
Fertilizers, American Fertilizing Co.55,915 to	55,917
Fertilizers, Birmingham Fertilizer Co.	55,921
Fertilizers, Georgia Chemical Works	55,927
Fertilizers, Virginia-Carolina Chemical Co. 56,093 to	56,095
Filter presses, Niles Tool Works Co.	55,986
Fire extinguishing chemical, portable tanks for containing a, H. H. Charles	55,971
Fireproof insulation for floors and walls, Magne-Silica Co.	55,930
Fish, cured, Cunningham & Thompson.55,735,	55,736
Fish, except canned lobsters, mackerel, clams, clam chowder, and salmon, salted, smoked fresh, and canned, Reed & Gamage	55,988
Fish, smoked, dried, or salted, cured, G. H. Perkins	55,879
Fishing rods, Hibbard, Spencer, Bartlett & Co.	55874
Flour in sacks or barrels, wheat, J. F. Edgeworth	56,037
Flour, self raising, H.-O (Hornby's Oatmeal) Co.	55,818
Flour, self raising prepared, Reliable Flour Co.	56,083
Flour, wheat, Semler Milling Co.	55,621
Flour, wheat, St. Mary's Mill Co.	55,624
Flour, wheat, Tennant & Hoyt	55,626
Flour, wheat, Aetna Mill & Elevator Co.	55,655
Flour, wheat, C. L. Anderson	55,657
Flour, wheat, Hawkeye Flour Co.	55,683
Flour, wheat, John A. Cole Milling Co.	55,686
Flour, wheat, Lidgerwood Mill Co.	55,694
Flour, wheat, Phoenix Flour Mill	55,706
Flour, wheat, Sitley & Son	55,718
Flour, wheat, Phoenix Milling Co.	55,779
Flour, wheat, Saginaw Milling Co.	55,782
Flour, wheat, Burrus Mill & Elevator Co..	55,938
Flour, wheat, B. Stern & Sons	55,957
Flour, wheat, F. J. Coyle	56,032
Food made from wheat, breakfast, Cream of Wheat Co.	55,812
Food, prepared stock, Ideal Stock Food Co.	55,823
Food, stock, H-T Stock Food Co.	55,821
Food, stock, Molassine Co.	55,827
Forceps, bone cutting, De Vilbiss Mfg. Co..	56,006
Fruits and vegetables, canned, Caulk & McCready	55,731
Fruits and vegetables, canned, Gulfport Grocery Co.	55,749
Fruits and vegetables, canned, T. Kensett & Co.	55,929
Fruits, vegetables, jellies, fruit butter, and fruit jams, canned. Erie Preserving Co.	55,743
Fungicide, B. Hammond	55,632
Garters, Common Sense Garter Co.	55,668
Garters and sleeve holders or armlets, Harris Suspender Co.	55,751
Gas burners and tips, illuminating, American Lava Co.	56,002
Gelatinous compounds, C. P. Walley	56,107
Gin, Kaufmann Bros. & Co.	55,757
Gin, Ben J. Goldman Co.	55,802
Glue, marine, Siemon & Elting	55,861
Gold and silver flat ware, hollow ware, and tableware, W. Linker	55,945
Golf balls, Kempshall Manufacturing Co.	55,983
Grease, goose, S. C. Elliott	56,038
Gunpowder, Curtis's & Harvey	55,939
Hair and scalp, preparation for, Foamacina Hair Preparation Co.	55,680
Hair preservative, National Remedy Co.	55,770
Hair renewers, Kingston & Kellogg	55,899
Hair restorative, S. R. Van Duzer	56,026
Hair restoratives and hair tonics, Citizens' Wholesale Supply Co.	55.666
Hair tonic, F. W. Peterson	56,020
Hair wavers, S. Beaumont & Fils.	55,591
Ham and bacon, Sprague, Warner & Co.	55,956
Hams, E. Godel & Sons	55,978
Harness and skirting leather, William Flaccus Oak Leather Co.	56,027
Hose and skirt supporters, Clark Manufacturing Co.	55,601
Hose composed in whole or in part of rubber, Toledo Rubber Co.	55,997
Hose supporters, Pioneer Suspender Co.	55,859
Hosiery, Rosenbaum Co.	55,648
Hosiery, H. Starker.....55,790,	55,791
Hosiery, Wayne Knitting Mills.....56,097,	56 098
Insect poison, P. M. Frank Disinfecting Co.	56,039
Insecticide, Iron City Chemical Co.	56,046
Insecticide for bugs and blight, B. Hammond	55,633
Insecticides and rodent poisons, H. Naprstek	55,767
Ironing boards, sleeve, N. A. Brown	55,845
Jams, jellies, preserves, and pickles, E. H. North	55,829
Jewelry, certain named, Plainville Stock Co.	55,907
Journals, periodical, Critic Publishing Co.	55,850
Knit stockings, socks, undershirts, and underdrawers, Ernstthal & Pohly	56,067
Knitted stockings, Hecht, Hirschler Co.	56,069
Lamps and the parts thereof, inverted gas, Manhattan Screw & Stamping Works..	56,017
Lamps for generating and burning acetylene gas, Acetylene Lamp Co.	55,959
Lanterns, magic, Geo. Borgfeldt & Co.	56,040
Laxative preparation. J. L. Speights	55,909
Laxatives, Inland Chemical Co.	56,045
Leather, patent, Keystone Leather Co.	55,688
Lime, Harpers Ferry Lime Co.	55,634
Liniment, J. S. Burton	55,595
Liniment, A. B. Richards	55,713
Liqueur and cordial, Societe Anonyme de la Distillerie de la Liqueur Benedictine de l'Abbaye de Fecamp	55,832
Lotion, S. R. Van Duzer	56,060
Lotions in liquid and paste form, skin, American Peroxide & Chemical Co.	55,656
Lotions, salves and ointments, Sereta Chemical Co.	55,649
Lye, Pennsylvania Salt Manufacturing Co.	56,049
Lye, Pennsylvania Salt Manufacturing Co.	56,077
Lye, Pennsylvania Salt Manufacturing Co..	56,078
Magazine, weekly, Manufacturers' Record Publishing Co.	55,901
Magazines, Colonial Press	55,891
Magazines, monthly, Inland Printer Co.	55,895
Magnesia preparation, liquid, Chas. H. Phillips Chemical Co.	55,598
Mattresses, Chas. A. Maish Co.	55,808
Medical compounds for certain named diseases, Dr. James Ware Remedy Co.	55,793
Medical compounds for treating diseases of the scalp, Headstream & De Flon	55,636
Medicated stock foods, L. W. Paste	55,645
Medicinal beverage, L. O. Read	55,646
Medicinal compounds for the cure of catarrhal diseases and colds, Ely Brothers..	55,741
Medicinal oil, Holland Medicine Co.	55,754
Medicinal oil for internal and external use, Holland Medicinal Co.	55.753
Medicinal oil or liniment, National Remedy Co.	55,772
Medicinal plasters, Medical Lake Salts Mfg. Co.	55,639
Medicinal vegetable oil, E. Ryan	56,021
Medicine, blood, Nicolay & Co.	55,701
Medicine, certain named, F. J. Schmidt	55,785
Medicine, diuretic, laxative, diaphoretic, and tonic, A. B. Bradley	55,969
Medicine for certain named diseases, Yucca Co.	55,798
Medicine, poultry, Dr. Hess & Clark	55,752
Medicines, certain named, F. Bischoff	55,885
Milk, fermented, Dr. Dadirrian & Sons' Co.	55.925
Mineral water, Maribel Mineral Springs Co.	55,612
Mineral water, Vossburg Lithia Springs Co.	55,840
Mineral water, Apollinaris Co.....55,871,	55,872
Moccasins, M. L. Getchell Co.	56,071
Mops, mop heads, and mop parts, Massachusetts Association for Promoting the Interests of the Adult Blind	55,857
Neckties or cravats, P. Cheever	55,631
Nerve and brain food, National Remedy Co.	55,769
Newspapers, C. P. Davis	55,887
Newspapers, weekly, Nordstjernan Publishing Co.	55,905
Oats, rolled, H-O (Hornby's Oatmeal) Co...	55,819
Oil and oil butter, olive, A. V. Stuart & Co.	55,800

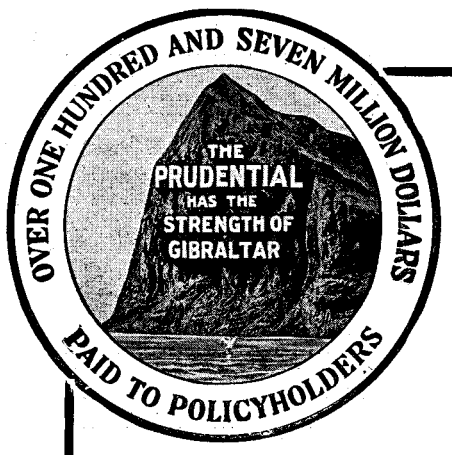

Cut Out the Worry

and you double your capacity for the kind of work that counts—the snappy, clear-headed, driving work that brings things to pass.

Cut out the worry that undermines your strength when you glance around the breakfast table at your little family, and realize that you haven't saved a cent against the day when they may be sitting there without you.

A very little money saved—not spent—just now, can be made to mean a great deal later on.

We would like to tell you how easy it is to save from a moderate income, enough to provide liberally for your family through Life Insurance.

THE PRUDENTIAL

INSURANCE COMPANY OF AMERICA

INCORPORATED AS A STOCK COMPANY BY THE STATE OF NEW JERSEY

JOHN F. DRYDEN, President Home Office, NEWARK, N. J.

SEND IN COUPON

Without committing myself to any action, I shall be glad to receive free particulars and rates of Endowment Policies.

For $ ..... Age.....

Name.....

Address.....

Occupation..... Dept. 121

Cement & Concrete
Reinforced Concrete
Concrete Building Blocks

SCIENTIFIC AMERICAN SUPPLEMENT 1543 contains an article on Concrete, by Brysson Cunningham. The article clearly describes the proper composition and mixture of concrete and gives the results of elaborate tests.

SCIENTIFIC AMERICAN SUPPLEMENT 1538 gives the proportion of gravel and sand to be used in concrete.

SCIENTIFIC AMERICAN SUPPLEMENTS 1567, 1568, 1569, 1570, and 1571 contain an elaborate discussion by Lieut. Henry J. Jones of the various systems of reinforcing concrete, concrete construction, and their applications. These articles constitute a splendid text book on the subject of reinforced concrete. Nothing better has been published.

SCIENTIFIC AMERICAN SUPPLEMENT 997 contains an article by Spencer Newberry in which practical notes on the proper preparation of concrete are given.

SCIENTIFIC AMERICAN SUPPLEMENTS 1568 and 1569 present a helpful account of the making of concrete blocks by Spencer Newberry.

SCIENTIFIC AMERICAN SUPPLEMENT 1534 gives a critical review of the engineering value of reinforced concrete.

SCIENTIFIC AMERICAN SUPPLEMENTS 1547 and 1548 give a resumé in which the various systems of reinforced concrete construction are discussed and illustrated.

SCIENTIFIC AMERICAN SUPPLEMENTS 1564 and 1565 contain an article by Lewis A. Hicks, in which the merits and defects of reinforced concrete are analyzed.

SCIENTIFIC AMERICAN SUPPLEMENT 1551 contains the principles of reinforced concrete with some practical illustrations by Walter Loring Webb.

SCIENTIFIC AMERICAN SUPPLEMENT 1573 contains an article by Louis H. Gibson on the principles of success in concrete block manufacture, illustrated.

SCIENTIFIC AMERICAN SUPPLEMENT 1574 discusses steel for reinforced concrete.

SCIENTIFIC AMERICAN SUPPLEMENTS 1575, 1576, and 1577 contain a paper by Philip L. Wormley, Jr., on cement mortar and concrete, their preparation and use for farm purposes. The paper exhaustively discusses the making of mortar and concrete, depositing of concrete, facing concrete, wood forms, concrete sidewalks, details of construction of reinforced concrete posts, etc.

SCIENTIFIC AMERICAN SUPPLEMENT 1372 contains an article by A. D. Elbers on tests and constitution of Portland cement.

SCIENTIFIC AMERICAN SUPPLEMENT 1396 discusses the testing of cement.

SCIENTIFIC AMERICAN SUPPLEMENT 1325 contains an article by Professor William K. Hatt giving an historical sketch of slag cement.

SCIENTIFIC AMERICAN SUPPLEMENTS 955 and 1042 give good accounts of cement testing and composition, by the well-known authority, Spencer B. Newberry.

SCIENTIFIC AMERICAN SUPPLEMENTS 1510 and 1511 present a discussion by Clifford Richardson on the constitution of Portland cement from a physico-chemical standpoint.

SCIENTIFIC AMERICAN SUPPLEMENT 1519 contains an essay by R. C. Carpenter on experiments with materials which retard the activity of Portland cement.

SCIENTIFIC AMERICAN SUPPLEMENTS 1465 and 1466 publishes an exhaustive illustrated account of the Edison Portland cement works, describing the machinery used.

SCIENTIFIC AMERICAN SUPPLEMENT 1491 gives some fallacies of tests ordinarily applied to Portland cement.

SCIENTIFIC AMERICAN SUPPLEMENT 1561 presents an excellent review by Brysson Cunningham of mortars and cements.

SCIENTIFIC AMERICAN SUPPLEMENT 1533 contains a resumé of the cement industry and gives some valuable formulæ.

SCIENTIFIC AMERICAN SUPPLEMENT 1575 discusses the manufacture of hydraulic cement. L. L. Stone is the author.

SCIENTIFIC AMERICAN SUPPLEMENTS 1587 and 1588 contain an able paper by Edwin C. Eckel on cement material and industry of the United States.

SCIENTIFIC AMERICAN SUPPLEMENT 1586 contains a review of concrete mixing machinery by William L. Larkin.

SCIENTIFIC AMERICAN SUPPLEMENT 1583 gives valuable suggestions on the selection of Portland cement for concrete blocks.

SCIENTIFIC AMERICAN SUPPLEMENT 1581 splendidly discusses concrete aggregates. A helpful paper.

SCIENTIFIC AMERICAN SUPPLEMENT 1595 presents a thorough discussion of sand for mortar and concrete, by Sanford E. Thomson.

Each number of the Supplement costs 10 cents. A set of papers containing all the articles above mentioned will be mailed for $3.50

Order from your Newsdealer or from

MUNN & CO., PUBLISHERS, 361 BROADWAY, NEW YORK CITY

Inexpensive Classified Advertisements

Advertising in this column is 50 cents a line. No less than four nor more than ten lines accepted. Count seven words to the line. All orders must be accompanied by a remittance. Further information sent on request.

SALE AND EXCHANGE.

FOR SALE.—Patents and all right on slot machine Exerciser and other new slot machine patents. For further particulars address R. H. Hartley, 405 Fourth Avenue, Pittsburg, Pa.

FOR SALE.—The George A. Seaman pipe and hose coupling patent and all for sale. For further particulars address George A. Seaman, Independence, Colo.

FOR SALE.—My patent No. 823,986 cream remover, or would take partner for developing same. This is a money-maker. For further particulars, E. S, Bartram, Selma, Ala.

FOR SALE.—The American Patent Right complete. No. 616563. "Aluminum Casks" for use as lining to brewers' ordinary beer casks. Full particulars W. R. Taylor, Medway Works, Rochester, Kent, England,

AUTOMOBILE FOR SALE AT A BARGAIN.—A Knox double opposed cylinder touring car, 1906 Model F, roomy and comfortable, powerful hill climber, never out of order, has elegant top, glass front, and full equipment, and used only a short while. The reputation of the Knox cars is too well known to need more description; the magnificent score of their car in the Glidden Tour speaks for itself. Address Automobile Bargain, Box 773, New York.

POULTRY PAPER, 44 pages, illustrated, 25c. per year, 4 months, 10c; sample free; 64-page practical poultry book free to yearly subscribers; book alone, 10c.; catalogue poultry books free. Poultry Advocate, Syracuse, N. Y.

IF YOU WANT to buy a machine, engine, boiler, power equipment, electrical, steam, pneumatic or other machinery—anything in the machine line—Tell Us and we will see that you get full descriptions, prices, catalogs, etc., from all the first-class manufacturers We charge nothing for the service. Address Modern Machinery Daily News, Security Building, Suite 10, Chicago.

MANLOVE AUTOMATIC DRIVEWAY GATE.—Always in order: operated by any wheel. Safe, handsome, valuable. 10,000 working. (Canadian rights for sale.) Manlove Gate Co., 272 Huron Street, Chicago, Ill.

BUSINESS OPPORTUNITIES.

TO MANUFACTURERS.—Are you represented in this territory? Are results through your jobber or agent in proportion to the population? (2,800,000 within 150 miles.) Are your goods being pushed? Are you manufacturing something not handled generally? I want the agency upon a commission basis of a line of goods that can be sold in this market; have wide acquaintance with manufacturers, contractors and packers of this city and vicinity; reference and bond given. Address Box 72, Armour Station, Kansas City.

LET US BE YOUR FACTORY.—Hardware specialties manufactured under contract, models developed. We are specialists in patent articles. Prompt service, first-class workmanship, reasonable prices. America Company, Momence, Ill.

AUTOMOBILE EXPERTS are in constant demand at high salaries. Our seven weeks' course is the most thorough and practical, fitting men to drive, handle and repair. Day and evening classes. Special course for owners. New York School of Automobile Engineers, 146 West 56th Street, New York.

A CEMENT Machinery Manufacturer looking for first-class practical cement mixer, desires to hear from inventors having something along this line that has been developed and tested. Address Buyer, Box 773, N.Y.

STEEL WHEELS to fit any wagon or cart. Made any size, any width of tire. Also handy wagons with low wheels and wide tires. Wood wagons with steel wheels, or steel wagons with steel wheels. Log wagons and heavy traction wagons of all kinds, for horses or traction engine power. Steel axles of any size and shape. Address Electric Wheel Company, Walton Square Quincy, Ill., U. S. A.

CAPITAL TO INVEST for practical patents of interest to women. Dress, fashion, utility, etc. Only patents filed within six months of interest. Address William F. Homan, 454 Broome Street, New York.

BARGAIN for one desiring a small and well-established manufacturing business, fully protected by patents, clearing $10,000 annually. Investigation solicited. Inquire Manufacturer, Box 773, New York.

WANTED.—Buyers for our one and two-seated business and pleasure Concord spring wagons. Send for 80-page carriage and harness catalog, free. Box 525. Kalamazoo Carriage & Harness Co., Kalamazoo, Mich.

HELP WANTED.

DEMAND for superintendents and foremen—men who can produce results—exceeds our supply. Write us to-day, stating age and experience fully. Hapgoods, 305 Broadway, N. Y.

POSITION WANTED.

YOUNG MAN GRADUATE of a celebrated technical school desires position where he can advance himself by hard work and attention to duties. Address Mechanical Engineering, Box 773, N. Y.

A GOOD MAN OUT OF WORK.—Anyone wanting a works superintendent is invited to answer this provided they pay $4,000 or over for a mechanical executive. George F. Stillman, 117 Summit Ave., Syracuse, N. Y.

WANTED a position as a General Foreman or Superintendent. Has been successful in producing first-class work at a satisfactory cost in Gas, Gasoline, or Kerosene Engines. Twenty years' experience. Open for engagement. Address C. R., Box 773, New York.

SITUATIONS AND PROFESSIONAL OPENINGS.

EXPORT ADVERTISING SOLICITOR WANTED.—An advertising solicitor having had long experience on export business can have a valuable position with a well-known export medium on proving his ability. Address Export, Box 773, New York.

PATENTS FOR SALE.

PATENT ON ELECTRIC EXERCISER may be had on royalty by capable parties or bought outright. Should yield a fortune by advertising, and through the trade in athletic goods. For further particulars, address P. O. Drawer 468, Buffalo, N. Y.

PATENT RIGHT FOR SALE.—An air-bed curtain protection. Great invention for breathing the pure air while in the room or in bed. The best cure for weak affected lungs. Franz Wild, Professor of Nature Cure 1502 Market Street, La Crosse, Wis.

SENSITIVE LABORATORY BALANCE

By N. Monroe Hopkins. This "built-up" laboratory balance will weigh up to one pound and will turn with a quarter of a postage stamp. The balance can be made by any amateur skilled in the use of tools, and it will work as well as a $125 balance. The article is accompanied by detailed working drawings showing various stages of the work. This article is contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1184.** Price 10 cents For sale by MUNN & Co., 361 Broadway, New York City, or any bookseller or newsdealer.

Oil, castor and medicinal sweet, E. R. Durkee & Co. 55,740
Oil emulsion, cod liver, Chas. H. Phillips Chemical Co. 55,600
Oil, olive, Hauselt & Luneschloss. 55,822
Ointment, Good Samaritan Ointment Co. 55,682
Ointment, Lewis Bros. 56,016
Ointment, Foster-McClellan Co. 55,606
Oleomargarin, Swift & Co. 55,958
Oysters, fresh shucked, J. L. McCready. 55,766
Oysters, shrimp, lobsters, clams, and crabs, canned, M. J. Boyer. 55,922
Packing composed of rubber and canvas, piston rod, Carolina Supply Co. 55,970
Paint, anticorrosive and antifouling, Raht-jen's American Composition Co. 55,908
Paint, semi-paste, H. B. Davis Co. 55,851
Paints for carriages and railway cars, C. A. Willey 55,913
Paints of all kinds, enamels, stains, and varnishes, Acme White Lead & Color Works 55,842
Paper and envelops, writing, H. S. Crocker Co. 55,943
Paper, blue print, E. G. Soltmann. 55,962
Paper, colored and ornamented, Metaxin-Fabrik Dr. Lilienfeld & Dr. Tedesko. 55,877
Paper of all kinds, fine writing, Woronoco Paper Co. 55,914
Paper packages or cartons for confectionery and popcorn, Dayton Paper Novelty Co. 55,976
Pencils, lead, E. G. Soltmann 55,951, 55,953, 55,955, 55,993
Pencils, lead, L. & C. Hardtmuth. 56,043
Pencils, lead, E. G. Soltmann. 56,055, 56,056
Pencils or crayons, black and colored, E. G. Soltmann 56,994, 56,057
Pens other than fountain pens, C. Howard Hunt Pen Co. 55,597
Perfumes, C. B. Woodworth Sons Co. 55,630
Perfumes, Leffler Mfg. Co. 56,015
Petroleum for illuminating purposes, refined, Standard Oil Co. of New York. 55,910
Phosphates, phosphites, and hypophosphites, L. J. Percy. 55,778
Piano players, automatic, Autopiano Co. 56,003
Piano players, automatic, Simplex Piano Player Co. 56,053
Pickles, Squire Dingee Co. 55,837
Pile cure, H. J. Burke. 55,594
Pills, J. F. Ballard. 55,628
Pills, Potter Drug & Chemical Corporation. 55,708
Pills, cathartic, J. Talford. 55,625
Pills, liver and kidney, C. B. Mumford. 55,947
Pills, powders, lozenges, tablets, and dragees, Mariani & Co. 55,611
Pineapples, C. Ruiz. 56,085
Pineapples, candied, Sipe & Sipe. 55,786
Plasters and salves, P. Beiersdorf & Co. 55,658
Plastic composition containing shellac, clay, and fiber, certain, Duranoid Mfg. Co. 55,977
Plastic composition made from animals' horns and hoofs, Kornit Manufacturing Co. 55,984
Plastic flooring and composition for making the same, Warren Brothers Co. 56,096
Polish, metal, S. N. Gold. 55,928
Polishing compound, G. W. Hoffman. 55,855
Popcorn, Albert Dickinson Co. 55,801
Potash, Pennsylvania Salt Mfg. Co. 56,048
Powder, face, Dr. Charles Co. 55,890
Powder for diseases of plants and fruit trees, insecticide, J. Souheur. 55,788
Powder, non-explosive lamp, E. E. Jennison 55,756
Powder, toilet, M. Chubb. 55,974
Powder, tooth, Lambert Pharmacal Co. 55,690
Powders, condition, F. G. Boynton. 55,593
Powders, toilet, Sanitol Chemical Laboratory Co. 56,022
Preparation for skin and flesh food, Dr. Charles Co. 55,888
Preparations for obviating perspiration, D. Friedlaender 55.746, 55,747
Printed pictorial matter, Western Color Print Co. 55,913
Quinine preparation, Chas. H. Phillips Chemical Co. 55,599
Raisins and dried currants, Wilkinson, Gaddis & Co. 55,883
Remedies for certain named diseases, American Pharmacal Co. 55,589
Remedies for certain named diseases, Dr. Richards Dyspepsia Tablet Association. 55,674
Remedies for certain named diseases, Victor Remedies Co. 55,724
Remedies for consumption, liver, and kidney diseases, Schiffman Co. 55,784
Remedies for diseases of the mucous membrane of the eyes and nose, A. W. Peck 55,949
Remedies for nervous disorders, O. Battista 55,936
Remedies for the stomach troubles of children, D. P. Byrne. 55,596
Remedy, certain named, G. W. Remsen. 55,711
Remedy for bowel complaints, T. P. Marshall 55,762
Remedy for certain named diseases, C. I. Shoop 55,650
Remedy for certain named diseases, Anti-Uric Co. 55,728
Remedy for certain named diseases, National Remedy Co. 55,773
Remedy for certain named diseases, Sanatorium System Co. 55,783
Remedy for certain named diseases, E. A. Billingslea 55,884
Remedy for certain named diseases, J. T. Mankin 55,900
Remedy for certain named diseases, J. C. Densten 56,035
Remedy for consumption, J. Nierhaus. 55,644
Remedy for gall stone, K. Weinreben. 55,794
Remedy for indigestion, R. Dregen. 55,738
Remedy for skin diseases and eruptions, A. B. Richards 55,620
Remedy for the cure of heaves in horses, Mineral Heave Remedy Co. 55,617
Remedy in liquid and pill form, pulmonary cough, Lester H. Greene Co. 55,693
Rheumatism cure, A. V. Garrison. 55,681
Ribbons, Pine Tree Silk Mills Co. 55,780
Roach and bug destroyer, M. H. Greenfield 55,748
Roofing, sheathing, waterproofing, and building felt, Barrett Manufacturing Co. 55,919
Rope and twine manufactured from vegetable fiber, American Manufacturing Co. 55,960
Rope, cord, lines, and twine manufactured from vegetable fiber, American Manufacturing Co. 55,961, 55,962
Rubber belting, Carolina Supply Co. 56,063
Rum, H. R. Myers. 55,699
Saddles, R. T. Frazier. 55,852
Salad dressing, Sprague, Warner & Co. 55,834
Salt for nervine preparations, soluble effervescent. Chelf Chemical Co. 55,972
Salve, Covillea Tridentata Mfg. Co. 55,671
Salve, corn, Kohler Manufacturing Co. 55,760
Salves, ointments, or unguents containing carbolic acid as an ingredient, J. W. Cole & Co. 55,975
Sardines and other preserved fish, M. Pita y Cia. S. en C. 55,781
Sardines, canned, U. H. Dudley & Co. 55,739
Sarsaparilla, J. Paradis. 55,618
Sarsaparilla, fluid extract of, National Remedy Co. 56,047
Sausages, Rohe & Brother. 55,989
Scissors, Neumeyer & Dimond. 55,903
Separators, certain named, D. M. Nesbit. 55,902
Sewing machines and their parts and attachments, all kinds of, Wheeler & Wilson Manufacturing Co. 55,999
Sewing machines, parts and attachments, Wheeler & Wilson Manufacturing Co. 55,866
Sewing machines, their parts and attachments, Wheeler & Wilson Manufacturing Co. 56,109
Shaving and whitening blades, L. Hardy Co. 56,070
Sheetings, Belton Mills. 55,966
Sheetings, Union Cotton Mills. 55,998
Sheetings and drillings, Buffalo Cotton Mills 55,937
Sheetings and drillings, cotton, Piedmont Mfg. Co. 55,950
Sheetings, shirtings, drillings, ducks, osnaburgs, denims, canton flannel, and cotton piece goods, York Manufacturing Co. 56,001
Ship logs, Thomas Walker & Son. 56,059
Ship logs and certain named lines, Thomas Walker & Son. 56,058
Shirts and blouses, men's and boys' outer and dress, Rice, Stix Dry Goods Co. 56,084
Shirts, dress, J. Loewy. 56,102
Shoe polish or blacking, Philipp Bauer Co 56,081
Shoes, ladies leather, Wolf Brothers & Co. 55,726, 56,100

Dixon's MOTOR Graphite

will prevent loss in compression, ease a stiff bearing and incidentally add to the life, power, speed and endurance of the machine. It's the secret of perfect lubrication for all motors.

Every motorist should have our special book on motor lubrication. Address Dept. W.

JOSEPH DIXON CRUCIBLE CO.
Jersey City, N. J.



MILLS FOR ALL MATERIALS.
OUR BUSINESS IS TO MAKE MACHINERY FOR GRINDING GRAIN, CRUSHING ROCKS AND PULVERIZING ALL HARD SUBSTANCES. WE HANDLE ALL KINDS OF MATERIALS FROM COTTON-SEED TO ROOTS AND HERBS, BY AN UNEXCELLED PROCESS. IF YOU WANT ANY KIND OF A MILL OR GRINDING MACHINE, COME TO US AND YOU WILL GET THE BEST AND STILL SAVE MONEY.
DEAL WITH US ONCE AND YOU WONT CHANGE.
ESTIMATES FREELY FURNISHED.
SEND FOR CATALOG No 4.)
SPROUT, WALDRON & CO. MUNCY, PA.



HESS FURNACES CUT COAL BILLS
Principles of construction obey scientific laws of combustion, radiation and heat-control. Medium in price because we sell direct from maker to user. Book free.
Hess Warming & Ventilating Co., 916 Tacoma Bldg., Chicago.

Eureka Machine Co.
Manufacturers of



CONCRETE MIXERS and **Block Machines**
Write for Catalog A
420 N Jackson St., Jackson, Mich., U.S.A.

RUBBER STAMP MAKING.—THIS article describes a simple method of making rubber stamps with inexpensive apparatus. A thoroughly practical article written by an amateur who has had experience in rubber stamp making. One illustration. Contained in SUPPLEMENT **1110.** Price 10 cents. For sale by Munn & Co. and all newsdealers.



"The Battery With-er-bee"
Fifty-two leading makers of automobiles and motor boats adopted the **Witherbee Storage Battery Igniter** because tests showed it to produce the biggest, hottest sparks and to run an average of over 1,200 miles without recharging.
Send for booklet and name of satisfied user living near you.
WITHERBEE IGNITER CO.
552 W. 43d St., New York City

Wizard Repeating LIQUID PISTOL
Will stop the most vicious dog (or man) without permanent injury. Perfectly safe to carry without danger of leakage. Fires and recharges by pulling the trigger. Loads from any liquid. No cartridges required. Over 6 shots in one loading. All dealers, or by mail, **50c.** Rubber-covered holster, **5c. extra**
Parker, Stearns & Co., 226 South St., Dept. G, New York

The Chautauqua Home Reading Course
1906-07
ENGLISH YEAR—No. 6
The 28th C. L. S. C. Year

The Chautauqua Home Reading Faculty for this year consists of
President Henry Churchill King, of Oberlin College.
Professor Thomas Francis Moran, of Purdue University.
Professor L. A. Sherman, of University of Nebraska.
Professor Cecil Fairfield Lavell, of Trinity College (formerly of University Extension Society).
Professor Katharine Lee Bates, of Wellesley.
William J. Dawson, of London, and others.

SUBJECTS

1.—The English Government - - - **Moran** **$1.50**
Evolution and actual workings of the English System concretely compared with the American System.

2.—What is Shakespeare? - - - - **Sherman** **$1.00**
Typical Plays Interpreted: Introduction to the Great Plays.

3.—Literary Leaders of Modern England - - **Dawson** **$1.00**
Wordsworth, Tennyson, Browning, Carlyle, Ruskin.

4.—Rational Living - - - - - **King** **$1.25**
Modern Psychology Applied to Everyday Life.

5.—In the Chautauquan Magazine (Monthly) **$2.00**
Imperial England - - - - LAVELL
The Expansion of the British Empire.
A Reading Journey in Noted English Counties BATES
Travel Articles in the England of To-day.
English Men of Fame
Character Sketches of Men of Art, Science and Philanthropy.
Library Shelf of Supplementary Reading—Round Table with Programs and Outlines for Readers—Highways and Byways editorials relating to topics of the year, Bibliographies, etc.

6.—English Year Membership Book - - **.50**
Helps and Hints for Home Study.

TERMS **$7.25**

Reduced Price for Complete Course - - **$5.00**
Above, Postpaid, Cash with order.

Any part or parts of the above Course will be sent separately, if wanted, postpaid, for the price opposite each title in the list, for Cash with order. **The Reduced Rate applies only to orders for the complete Course, cash with order.**

CHECK WHAT YOU ORDER, COMPLETE COURSE OR 1, 2, 3, 4, 5, 6.

Name ..... S. A.
Post Office .....
County ..... **State** .....

ORDER FROM CHAUTAUQUA PRESS, Chautauqua, N. Y.

Hammer the Hammer

Accidental Discharge Impossible

Every owner of an Iver Johnson has a double feeling of safety—safety as to protection of life and property, and absolute safety as to accidental discharge; for there is but one way to discharge the

IVER JOHNSON
SAFETY AUTOMATIC **REVOLVER**

and that is to pull the trigger.

In addition to the safety features of the Iver Johnson is the knowledge of absolute reliability and accuracy and dependable quality.

Iver Johnson Safety Hammer Revolver
3-inch barrel, nickel-plated finish, 22 rim fire cartridge, 32-38 center fire cartridge - - - **$5.00**

Iver Johnson Safety Hammerless Revolver
3-in. bbl., nickel-plated finish, 32-38 center fire cartridge - **$6.00**

Sold by Hardware and Sporting Goods dealers everywhere, or will be sent prepaid on receipt of price if your dealer will not supply.

TRADE MARK
IVER JOHNSON
Look for the Owl's Head trademark on the grip
Send for Our Booklet, "Shots"
full of firearm lore; gives important facts every owner of firearms should know; goes into details and illustrates by sectional views the peculiar construction of the Iver Johnson.
Iver Johnson's Arms & Cycle Works
170 River Street, Fitchburg, Mass.
New York—99 Chambers St. Pacific Coast—P.B Bekeart Co ,2280 Alameda Ave ,Alameda, Cal. Europe—Pickhuben 4, Hamburg, Germany
Iver Johnson Bicycles and Single Barrel Shotguns

ELECTRIC LAUNCH MOTOR.—THE design in this paper is for a motor of unusual simplicity of construction, which can easily be built by an amateur at small cost. It is intended for a boat of about 24 feet over all and 4 feet 6 inches beam, drawing 18 inches, and is capable of propelling such craft at a speed of 7 miles per hour. Illustrated with 21 cuts. See SCIENTIFIC AMERICAN SUPPLEMENT, No. **1202**. Price 10 cents by mail, from this office and from all newsdealers.

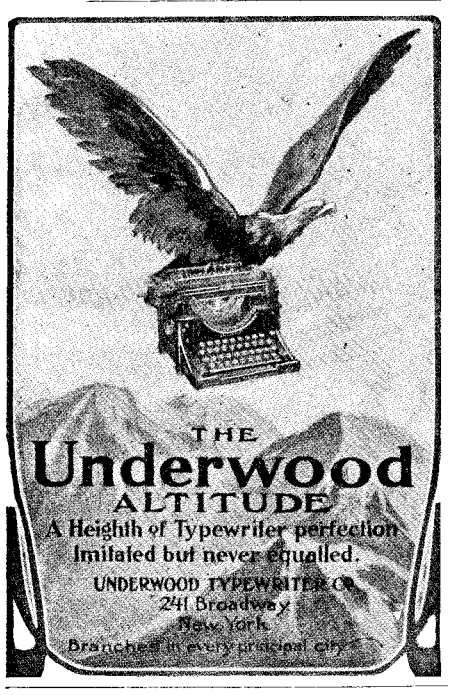

60 YEARS' EXPERIENCE

PATENTS

TRADE MARKS
DESIGNS
COPYRIGHTS &C.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. HANDBOOK on Patents sent free. Oldest agency for securing patents.

Patents taken through Munn & Co. receive *special notice*, without charge, in the

Scientific American.

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.

MUNN & Co. 361 Broadway, **New York**
Branch Office, 625 F St., Washington, D. C.

Shoes, leather, Peters Shoe Co.....56,079,	56,080
Shrimp and similar shell fish, canned, Pass Packing Co.	55,777
Silks and silk mixture textiles, Silk Textile Water Proofing Co.	55,992
Skin food and massage cream, J. D. McCann Co.	55,896
Soap, Colgate & Co.	55,846
Soap, medicated, Dr. Charles Co.	55,889
Soap, scrubbing, Fred Fear & Co.	55,853
Soaps and soap powders, Colgate & Co. 55,847, 55,848, 55,849,	55,886
Soda and saleratus, baking powder, and sal soda, Church & Dwight Co.	55,665
Soda, bicarbonate of, Pennsylvania Salt Mfg. Co.	56,050
Soda water, non-alcoholic acidulated carbonated, C. H. House	55,685
Soda water with or without the addition of flavoring materials, J. Matthews	55,764
Sodium, theobromate and sodium salicylate, preparations of, Knoll & Co.	55,759
Specific for malaria, National Remedy Co..	55,771
Specific for treatment of the liver, B. S. Read	55,710
Specific for worms, National Remedy Co....	55,774
Specula, De Vilbiss Mfg. Co.	56,008
Spool cotton, sewing cotton, and thread, American Thread Co.	56,031
Stalk cutters, Moline Plow Co.	56,019
Starch, lump, Sprague, Warner & Co.	55,833
Steel, Crucible Steel Company of America. 56,033,	56,064
Stoves, Federal Stove Co.	55,980
Stoves, furnaces, and ranges, P. D. Beckwith	55,854
Suspenders, Gordon Manufacturing Co.	55,609
Syrup, Sprague, Warner & Co.	55,836
Tablets and writing pads, O. W. Nottingham Co., (now "New Century Tablet Co.")	55,906
Tea, Sprague, Warner & Co.	55,623
Tea, Chase & Sanborn	55,664
Textiles, certain named, Everett Mills	55,604
Textiles, certain named, G. Willis & Co.	55,796
Tin and terne plate, N. & G. Taylor Co.	56 090
Tin and terne plates, Follansbee Brothers Co.	56,068
Tobacco, smoking, J. F. Zahm Tobacco Co..	55,850
Tobaccos, manufactured plug, twist, and cut, Zimmer & Co.	55,868
Toilet preparations, certain named, E. A. Twist	55,722
Toilet preparations, certain named, Citizens' Wholesale Supply Co.	55,809
Tom and jerry, A. Reinert	56,082
Tonic, H. R. Myers	55,700
Tonic and strengthening compounds, C. L. M. Omnes	55,775
Tonic for chills and fevers, N. J. Paschall..	55,776
Tonic, reconstructive histogenetic, T. W. Stemmler	55,721
Tools, gilding, W. H. Coe Manufacturing Co.	56,108
Tooth cleaning paste, R. L. Newell	55,904
Toys and toy-circus equipment, A. Schoenhut Co.	55,653
Tree wash for spraying trees and shrubbery, liquid, J. F. Derror	56,036
Trephines, De Vilbiss Mfg. Co.	56,007
Undershirts and drawers made of linen woven cloth, Earl & Wilson	55,676
Uric-acid solvent, Dusal Chemical Co.	55,675
Valves and cocks, H. Mueller Manufacturing Co.	56,011
Varnish and hard oil finish, Spokane Paint & Oil Co.	55,881
Varnish, shellac, J. B. Day & Co.	55,892
Varnishes and enamels, brewers', Jno. Werner & Co. G. m. b. H.	55,897
Vermifuge, Gilpin, Langdon & Co.	55,607
Veterinary liniments, M. M. Gordley	55,608
Veterinary remedy for lump jaw, F. J. Heine	55,684
Veterinary remedy for poll evil and fistula, Rhinol Medicine Co.	55,619
Vinegar, M. A. Gedney Pickling Co.	55,826
Washing compound, F. Steel	55,862
Watch dials and watch movements, Rode Watch Co.	55,647
Watch movements, Hampden Watch Co.	55.944
Watches and clocks, Tiffany & Co.	56,105
Water, purified, A. Schantz, Sr.	55,860
Water, table, J. Ries	55,714
Wax, bite, Crown Dental Laboratory	55,924
Wheat, cooked and flaked, "Force" Food Co.	55,816
Wheat, cooked and flaked, H-O (Hornby's Oatmeal) Co.	55,820
Whiskies, McCart-Mosset Co.	55,765
Whisky, A. Bauer & Co.	55,652
Whisky, Breen & Kennedy	55,660
Whisky, T. Bresnahan & Son	55,661
Whisky, J. Debar	55,672
Whisky, F. Chevalier Co.	55,679
Whisky, B. J. Kohlman	55,689
Whisky, W. Lanahan & Son	55,691
Whisky, Luyties Brothers	55,695
Whisky, Meyer Marx Co.	55,696
Whisky, F. Murphy & Co.	55 698
Whisky, Old Kentucky Distillery	55,702
Whisky, Rosenfield Bros. & Co.	55,715
Whisky, W. P. Squibb & Co.	55,720
Whisky, Chicago Distilling Co.	55,732
Whisky, P. Dempsey & Co.	55,737
Whisky, M. L. Eppstein	55,742
Whisky, Harris, Johnson & Co.	55,750
Whisky, O. H. Kiefer	55,758
Whisky, B. W. Le Compte	55,761
Whisky, Sol Rauh & Sons Co.	55,787
Whisky, N. M. Uri	55,792
Whisky, A. A. Wolf & Co.	55,797
Whisky, H. Campe & Co.	55.805
Whisky, Columbia Distilling Co.	55,810
Whisky, B. J. Kohlman	55,824
Whisgy, T. E. O'Keefe	55,830
Whisky, M. J. Bligh	55,967
Whisky, M. L. Eppstein	55,979
Whisky, Theobald & Son Co.	55,996
Whisky, Wright & Taylor	56,000
Whisky, Union Distilling Co.	56,023
Whisky, D. Holzman & Co.	56,034
Whisky, R. A. Splaine & Co.	56.054
Whisky, Bachtold & Achermann	56,061
Whisky, A. Baum & Sons	56,062
Whisky, J. H. Schwartz	56.087
Whisky, J. Spengler	56,089
Whisky, Union Distilling Co.	56,091
Whisky, N. M. Uri	56,092
Whisky, Irish, John Power & Son	55,687
Wine, California Wine Association....55,662,	55,663
Wine champagne, G. H. Mumm & Co. 55,641 to	55,643
Wool and cotton piece goods, Pacific Mills	55,704
Woolen batistes, Blodgett, Ordway & Webber	55,592
Woolen piece goods, Beebe-Webber Co.	55,629
Yarns, cotton, Shaw, Jardine & Co.	56,052
Yarns, cotton, McConnel & Co.	56,072
Yarns, embroidery, knitting, and crocheting, Dexter Yarn Co.	56,065
Yeast, National Distilling Co.	55,768

LABELS

"Bison," for canned sugar corn, Cokato Canning Co.	13,051
"Flicker," for cigarettes and tobacco, S. Brisk	13,049
"Luxus," for beer, Fred Krug Brewing Co..	13,050
"The Standard of the World," for enameled ware, Humphryes Mfg. Co.	13,053
"Togolin," for a sweeping compound, B. Zelle	13,052

PRINTS.

"Burnham's Jellycon," for jelly dessert, Sackett & Wilhelms Lithio. & Ptg. Co.	1,758

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address Munn & Co., 361 Broadway, New York.

COMFORT and health are destroyed and life endangered through breathing impure air, poisoned with smoke, dust and gases from old-fashioned top-feed furnaces and stoves. Besides absolutely guaranteeing to you the *purest, cleanest* and *healthiest heat* obtainable at any price, the

Peck-Williamson Underfeed Furnace
Will Save You 1-2 to 2-3 on Coal Bills

You get dividends in health as well as in dollars. Smoke, gases, soot and dirt cannot escape from the Underfeed. Entirely consumed by fire which *burns on top*, these *waste-elements* in Top-feeds are turned into *heat units* in our **Underfeed.**



An eminent physician, Dr. H. E. Ramsey, of Allegheny, Pa., gives the Underfeed *a clean bill of health.* He recently wrote us:

"I installed one of your Underfeed Furnaces last Fall. We have ten registers heating that many rooms. I purchased 300 bushels of slack at 6c. per bushel, and have 50 bushels left. I think the UNDERFEED is the best furnace on the market and very clean and economical. Two of my neighbors with their expensive hot water systems used four times the quantity of fuel I did in dollars and cents, and nearly always had a volume of smoke equal to a small rolling mill coming out of their chimneys. I like the Peck-Williamson UNDERFEED all right."

Mind you, this is only *one* of hundreds of testimonials. We'd like to send you a lot of them, with the illustrated UNDERFEED booklet, full of Furnace facts. Heating plans and services of our Engineering Department are yours—absolutely FREE. Write to-day. Please give name of local dealer with whom you prefer to deal.

THE PECK-WILLIAMSON CO., 351 W. Fifth St., CINCINNATI, OHIO.
Dealers are invited to Write for Our Attractive Autumn Proposition.

MAN WANTED

in the REAL ESTATE BUSINESS. No canvassing or soliciting required. Experience unnecessary if honest, ambitious, and willing to learn the business thoroughly by mail and become our local representative. Many make $300 to $500 monthly. Write at once for full particulars. Address either office.

NATIONAL CO-OPERATIVE REALTY CO.
Suite 74, 52 Dearborn St., or Suite 74, 1410 "H" St.,
Chicago, Ill. Washington, D. C.

YOUR PATENT

Carefully Developed May Be a Success!

Development of ideas, experiments, models. Specialty, small machinery and fine instruments. Modern equipments. Technical office. RICHTER BROTHERS, Mechanical-Electrical Engineers and Manufacturers, 115 Court Street, Hoboken, N. J. Two minutes from D. L. & W. Depot.

ELECTRICAL APPARATUS REPRESENTED by Conventional Diagrams in Drawings.—Fifty diagrams showing the usual method of illustrating electrical apparatus in drawings. A labor saving paper. Contained in SUPPLEMENT **1106**. Price 10 cents. For sale by Munn & Co. and all newsdealers.

Scientific Color Printing

We have added to our large printing establishment, and now have in successful operation, a most complete

Photographic Color Department

equipped with the largest cameras, best possible instruments and printing machinery for making

Fine Colored Reproductions

by our Photo-Color Process.

¶ Paintings, Objects of Art, Rugs, Carpets, Commercial Designs, and articles of merchandise faithfully reproduced in all their natural colors, in any quantity.

¶ Periodical Covers, Artistic Book and Catalogue work, Calendars are among our specialties.

The SPARRELL PRINT
265 CONGRESS STREET BOSTON

SPARK COILS

Their Construction Simply Explained

Scientific American Supplement 160 describes the making of a 1½-inch spark coil and condenser.

Scientific American Supplement 1514 tells you how to make a coil for gas-engine ignition.

Scientific American Supplement 1522 explains fully the construction of a jump-spark coil and condenser for gas-engine ignition.

Scientific American Supplement 1124 describes the construction of a 6-inch spark coil

Scientific American Supplement 1087 gives a full account of the making of an alternating current coil giving a 5-inch spark.

Scientific American Supplement 1527 describes a 4-inch spark coil and condenser.

Scientific American Supplement 1402 gives data for the construction of coils of a definite length of spark.

The above-mentioned set of seven papers will be supplied for 70 cents.

Any single copy will be mailed for 10 cts.

MUNN & COMPANY, Publishers
361 Broadway New York

WANTED.—Structural Steel Work Draftsmen and Assistant Structural Steel Work Draftsmen. Pay from $3.52 to $5.04 per diem. An examination will be held at the Navy Yard, Brooklyn, N. Y., September 12, 1906, for the purpose of establishing an eligible register for the above. For application and further information address "Commandant, Navy Yard, Brooklyn, N. Y."

LET US BE YOUR FACTORY
WRITE FOR ESTIMATE ON ANY ARTICLE YOU WANT MANUFACTURED
STAMPINGS, MODELS, EXPER. WORK
WRITE FOR FREE BOOKLET
THE GLOBE MACHINE & STAMPING CO.
970 Hamilton St., Cleveland, O.

AUTOMOBILE INSURANCE
Every owner of an Auto should insure his car against loss or damage, whether in actual riding or in transit. We fully insure you against such loss or damage, however sustained. Premiums low Fullest reliability.
H. W. BEALS, 76 William Street, New York

WE MAKE GOOD
models. We do experimental work, and do it good. We manufacture and sell electrical and mechanical apparatus at the correct prices. Agents wanted everywhere. United Electrical Mfg. Co., 53 Vesey Street, New York.

Bad —DON'T DRINK— **Water**
Our Filters Purify, Deodorize, Decolorize. Booklet Free.
Buhring Water Purifying Co.
68 Murray St., New York

SHOP ROOM TO LET
FULLY EQUIPPED MACHINE SHOP
S. A. NICHOLAS, 30 Greenwich Avenue

ICE MACHINES Corliss Engines, Brewers and Bottlers Machinery. THE VILTER MFG. CO. 899 Clinton St., Milwaukee, Wis.

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery
E. V. BAILLARD. 24 Frankfort Street. New York.

RUBBER Expert Manufacturers Fine Jobbing Work
PARKER, STEARNS & CO., 228-229 South Street, New York

OLD GOLD, SILVER AND PLATINUM BOUGHT
Ship to us and we will remit cash immediately.
ASHER KLEINMAN, 250 8th Ave., N. Y. City, N. Y.

W. B. KNIGHT MACHINERY CO.
Mfrs. of Special Machinery and Tools
2019 to 2025 Lucas Ave., ST. LOUIS

MODELS CHICAGO MODEL WORKS 179 E. MADISON ST. CHICAGO, ILL. ESTABLISHED 1867 WRITE FOR CATALOGUE OF MODEL SUPPLIES.

Model and Experimental Work. Years of experience. M. P. Schell, 1759 Union St., San Francisco.

MODELS & GEARS INVENTIONS PERFECTED UNION MODEL WORKS 193 So. CLARK ST. CHICAGO.

LINENOID.-A MOLDED MATERIAL MADE OF PURE LINEN
CRANE BROS. MANUFACTURERS, WESTFIELD, MASS.

BE A WATCHMAKER
Send for our free book, How to be a Watchmaker. Stone School of Watchmaking, 904 Globe Bldg., St. Paul, Minn.



Removed to **182 Milk Street.**

ARE YOU SATISFIED

WITH YOUR PRESENT LOCATION?

Do you want to establish a plant in a field where conditions are more favorable? There are locations for factories of all kinds on the Lehigh Valley Railroad. It will pay you to investigate. Address or call on

P. H. BURNETT, *Industrial Agent*,
143 Liberty St., New York

WE MANUFACTURE MOULDED AND SPECIAL RUBBER GOODS OF EVERY DESCRIPTION AND CAN FURNISH ANY SPECIAL RUBBER ARTICLE TO YOUR SATISFACTION.

NEW YORK BELTING & PACKING CO. LTD.
91-93 CHAMBERS STREET,
NEW YORK.

THE WORD **CHARTER** CHARTER

stands for "The Original and First **GASOLINE ENGINE of the WORLD,"**
Stationaries, Portables, Hoisters, Pumpers, Sawing and Boat Outfits, Combined with Dynamos.
Also Manufactured and Natural Gas, Kerosene.
Send for Catalogue and State Power Needs.
CHARTER GAS ENGINE CO., Box 148, Sterling, Ill.

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Safes, Sewing Machines, Bicycles, Tools, etc. Save Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill.

George White Company
Fine Experimental Machinists

OFFICE AND WORKS:
22 and 24 Morris St., JERSEY CITY, N. J.
'Phone 1554

A Few Things That We Can Do

We Investigate, refine and perfect Crude Ideas or Inventions, reducing them to Commercial Value.
Experimental Work, Mechanical Drawings, Working Models of Patented and other Inventions.
Special Machinery, Jigs, Tools and Dies.
Special Motors, Hydrocarbon, Steam, Compressed Air, and Turbine Motors.
Perfect and Construct Automobiles, Air-Ships, and Flying Machines.

Call and See A Few Things We Have Done

Bausch & Lomb Reading Glasses

The lenses of these large magnifying glasses are carefully ground and polished and are mounted in durable nickeled rim with ebonized handle. Every SCIENTIFIC AMERICAN reader ought to have one of these glasses. There are hundreds of things in every day work that are easier to see with a little magnification.

PRICES: 2 inch lens, $0.75, Post Paid. 3 inch lens, 1.20, Post Paid, Catalog on request.

Bausch & Lomb Opt. Co., Rochester, N. Y.
NEW YORK BOSTON WASHINGTON CHICAGO SAN FRANCISCO

IT PAYS BIG To amuse the Public With **Motion Pictures**



NO EXPERIENCE NECESSARY as our instruction Book and "Business Guide" tells all. We furnish Complete Outfits with Big Advertising Posters, etc. Humorous dramas brimful of fun, travel, history, religion, temperance work and songs illustrated. One man can do it. **Astonishing Opportunity** in any locality for a man with a little money to show in churches, school houses, lodge halls, theatres, etc. **Big profits each entertainment.** Others do it, why not you? It's easy; write to us and we'll tell you now. **Catalogue free.**
AMUSEMENT SUPPLY CO. 467 Chemical Bank Bldg., CHICAGO.

Can You Draw This?

Copy it as well as you can, send to us and we will give you a handsome portfolio of drawings by the noted artist, Charles Lederer. A course of lessons by mail, at home, may qualify you to earn a good salary as an artist and cartoonist. Instruction individual and exactly adapted to your talent.

THE LEDERER SCHOOL OF DRAWING
Chattanooga, Tenn.

THE MIETZ & WEISS



Send for Catalogue

OIL ENGINES

Stationary 1½ to 80 H. P.
Marine 3½ to 100 H. P.

Use KEROSENE and FUEL OILS. Direct connected Generators, Pumps, Air Compressors, Hoists, etc. Thousands in use in all parts of the world.

AUGUST MIETZ
128-138 Mott St., New York, U.S.A.

FISK TIRES

SAVE TIME, MONEY AND TEMPER

Without Fisk Tires you are simply wasting Time, Money, Temper and Comfort. They are the only tires constructed on Strictly Scientific and Practical Principles.

POSITIVE LOCKING DEVICE —Insuring SAFETY.
ALL AIR ABOVE THE RIM —Affording COMFORT.
SUPERIORITY OF QUALITY —Guaranteeing DURABILITY.

Our production for '06 is the finest that we ever offered, representing, not merely high grade exterior evidences, but Honest Quality—"Fisk Quality"—that is at present unsurpassed.—**Truly 'twill be worth your while to buy Fisk Tires.**

We should like to send you a little printed article on tires.

THE FISK RUBBER CO., Chicopee Falls, Mass.

Something you need to know about.

SEND FOR CATALOGUE AND SAMPLES

Star Expansion Bolt Co., Cedar & West Sts., New York

LEARN TO BE A WATCHMAKER

Bradley Polytechnic Institute
Horological Department
Peoria, Illinois
Formerly Parsons Horological Inst.
Largest and Best Watch School in America

We teach Watch Work, Jewelry, Engraving, Clock Work, Optics. Tuition reasonable. Board and rooms near school at moderate rates. Send for Catalog of Information.

STEAM USERS

Rainbow Packing

The original and only genuine red sheet packing.

The only effective and most economical flange packing in existence.

Can't blow Rainbow out.

For steam, air, hot or cold water, acid and ammonia joints.

Beware of imitations.

Look for the trade mark—the word Rainbow in a diamond in black, three rows of which extend the full length of each roll.

Manufactured exclusively by
PEERLESS RUBBER MFG. CO.
16 Warren St., New York

Tools! Tools! Tools!



and all you want to know about them. Our Tool Catalogue No. 22 is a cloth-bound book of 950 pages. If you want to "know it all" about Tools you should send for this book at once Sent post-paid on receipt of $1.00 which will be refunded from your first purchase from us of $10.00 or over.

MONTGOMERY & CO.
105 Fulton Street, N. Y. City

PORTABLE CONCRETE
Block Machine

Ambitious young men can start fine business, immediately profitable, easily expanded.

Blocks cost 6 cents to make, sell for 18 cents. One man can make 200 blocks per day. Whole outfit costs $125.00.

Sand, water and Portland cement only materials required.

Sent on trial.

THE PETTYJOHN CO.
615 N. 6th St., Terre Haute, Ind.

Whitewash Your Buildings

At Lowest Cost

With a Progress Spraying and Whitewashing Machine. One man can apply whitewash or cold water paint to 10,000 square feet of surface in one day and do better work than with a brush. It is also adapted for **spreading disinfectants, destroying insect pests and diseases on trees, vegetables and other plants, extinguishing fires, washing windows, wagons,** etc., and other purposes. The machine is really a little water works system on wheels because the easy movement of the pump develops a pressure exceeding 80 pounds, and will raise the liquid more than 80 feet above its own level. The Progress, 12 gallon size, costs only $21.00: the 20 gallon size, $30.00. It will last a lifetime and pays for itself the first year. Other types of machines sold as low as $9 and $10. Write for detailed description.

Dayton Supply Co., Dept. R, Dayton, O

1½ h.p. engine only, $33.15
3 h.p. engine only, 44.00



DETROIT AUTO-MARINE Motor New Model **1906**

The Smoothest Thing That Runs

Noise, Friction and Uncertainty reduced to a minimum.
The result of a high standard of manufacturing—which means every piece of metal tested—not by rule of thumb, but by scientific methods, on a testing machine built for the purpose.
From foundry to user, the DETROIT AUTO-MARINE MOTOR passes in its various stages under one organization head.
We are making **10,000 Auto-Marine Gasoline** engines this year, not merely assembling parts made in various factories.

WE MANUFACTURE THE MOTOR COMPLETE AND GUARANTEE EVERY MOTOR WE MAKE

1½ H. P., $33.15. Engine only
3 H. P. will develop 4 H. P., $44.00. Engine only

For stationary power purposes, we equip these engines with the Auto Adjustable Governor, at an addition of $5—making one of the most satisfactory gasoline engines for power purposes built.

Write for Catalog describing Auto-Marine Motors 1 to 20 H. P. and Auto Adjustable Governor.

DETROIT AUTO-MARINE CO.
75 Wade Building, Cleveland, Ohio
P. G. HALL, Mgr., 95 Liberty Street, New York
The Bourse, Philadelphia

The only builders of Auto-Marine Engines in the World

FOR DEPENDABLE POWER



For power that will give you the best service with the least trouble and expense to you—power adapted to your particular requirements—

Get an I. H. C. Gas and Gasoline Engine

Because it is built more simply, along more practical lines, than any other high grade Engine.
For fuel use gasoline, gas or denatured alcohol.
Let us show you how and why it will save you time, money and bother. There are good reasons and plenty of them. You owe it to yourself to investigate.
Send for Free Catalogue, illustrating and describing Horizontal Engines:
Stationary, 4, 6, 8, 10, 12 and 15 H. P.
Portable, 6, 8, 10, 12 and 15 H. P.
Vertical 2, 3, 4 and 5 H. P.

International Harvester Company of America (Inc.)
7 C Monroe Street, Chicago, Ill.

DUSTLESS
House Cleaning Machinery



Stationery Plant

for private residences. Uses power from lighting current. $350 and up. **State size of house.**

Private plants for office buildings, department stores, etc, *Portable* plants for residential cleaning business, $2,000 and up. We sell exclusive city rights. Over 85 companies now operating.

General Compressed Air House Cleaning Co.
4467 Olive Street, St. Louis, Mo.

COLD GALVANIZING.
AMERICAN PROCESS. NO ROYALTIES.
SAMPLES AND INFORMATION ON APPLICATION.



NICKEL AND **Electro-Plating** Apparatus and Material.
THE **Hanson & VanWinkle Co.,**
Newark, N. J.
30 & 32 S. Canal St. Chicago.

The speed of the auto depends to a large extent on the "spark". Sparks produced by the Apple Ignition System get every ounce of power possible out of your motor.

All authorities agree that storage battery current produces the "fattest" and hottest sparks—the kind that ignites the whole charge at one instant.

But storage battery current, to be at its best, should be drawn from an inexhaustible supply—as furnished by the Apple Ignition System.

This consists of the Apple Storage Battery, which is being constantly charged by the Apple Battery Charger, as fast as the Battery gives off current. It provides ample available current for the starting spark, electric lights, electric horns, annunciator bells, etc.

The Apple Battery Charger is a complete dynamo, built and designed as well as any dynamo made, irrespective of size or use for which intended. It is run by the fly-wheel of the ingine, and provides a source of current that will not fail you.

When you write state whether your engine is "make and break" or "jump spark."

The Dayton Electrical Manufacturing Co.
98 St. Clair St.
Dayton, - - Ohio.



BACKUS

GAS & GASOLINE ENGINE

Simple, Economical, Durable
Suitable for all kinds of work

BACKUS WATER MOTOR, cheapest power known

Write for circular and prices

BACKUS WATER MOTOR CO., Newark, N. J., U.S.A.

Screw Machine Products

in HIGH BRASS, LOW BRASS and STERLING SILVER
from 1 inch down.

Quotations Made From Model or Working Drawings

GEORGE W. DOVER CO.
Factory B Providence, R. I.

MY BOOK FREE

"How to Remember"
Free to Readers of this Publication

Stop Forgetting

THE KEY TO SUCCESS

You are no greater intellectually than your memory. My course simple, inexpensive. Increases business capacity, social standing, gives an alert, ready memory for names, faces and business details. Develops will, conversation, speaking, etc. My booklet, "How to Remember," sent free.

DICKSON SCHOOL OF MEMORY, 700 Kimball Hall, Chicago

HANDSOME PROFITS

are realized by growing pineapples in Porto Rico. Our coöperativ plan allows non-residents to obtain plantations by small monthly payments. Large annual returns and absolute security No frosts, no tariff, cheap labor and cheap freights. If you want to know all about beautiful Porto Rico and our attractive proposition send for free booklet.

LA FORTUNA FRUIT CO.
1 Madison Ave. New York

The Way to Get Out of a Hole Is Not to Get into It

In measuring with this Combination Triple-beam Roller Gauge you can't make a mistake. A convenience, a labor-saver for single, double or triple measurements. Polished and nickel-plated. $1.25, postpaid. *Catalogue free.*

GOODELL-PRATT COMPANY Greenfield, Mass.

THE BERKEFELD FILTER

The Standard of the World The only filter removing typhoid and cholera bacilli from the water. Tested and recommended by Bacteriologists all over the world The greatest invention in the filter technic during the last ten years. The filter gives water in small and large quantities according to the sizes. Easily cleaned, filter cylinders sterilized by boiling in water. Send for circulars to

BERKEFELD FILTER CO.
4 Cedar Street, New York

HELMET OIL LUBRICATES ANYTHING.
IF YOU HAVE A HOT BOX TRY IT. C. H. BESLY & CO. CHICAGO-ILL-U.S.A.
15 to 21 South Clinton Street.